Informatica® Supplier 360 SaaS
October 2026

Supplier 360 SaaS

Informatica Supplier 360 SaaS Supplier 360 SaaS
October 2026

© Copyright Informatica LLC 2020, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-30

Table of Contents

Preface 9

Informatica Resources 9

- Informatica Documentation 9
- IDMC web site 9
- Intelligent Data Management Cloud Communities 9
- IDMC Marketplace 9
- Informatica Knowledge Base 10
- IDMC Trust Center 10
- Informatica Global Customer Support 10

Chapter 1: Introducing Supplier 360 SaaS 11

Key concepts 12

- Business entities 12
- Source records 12
- Patch records 12
- Related records 12
- Workflows and tasks 13
- Hierarchies 13
- Extensions 13

Home page 13

- Dashboard 13
- Widgets 13
- Charts 14
- Reports 14

Editing your user profile 14

Date and time values 14

Chapter 2: Supplier 360 SaaS data dictionary 16

Supplier business entity model 16

- General fields of Supplier business entity 16
- Address field group of Supplier business entity 17
- Alternate Names field group of Supplier business entity 19
- Bank Details field group of Supplier business entity 19
- Contract field group of Supplier business entity 20
- Diversity field group of Supplier business entity 22
- Documents field group of Supplier business entity 22
- Email field group of Supplier business entity 23
- Executive Members field group of Supplier business entity 24
- Financial field group of Supplier business entity 24
- Identifier field group of Supplier business entity 25

Insurance field group of Supplier business entity. . . . 26
Phone field group of the Supplier business entity. . . . 27
Reference Details field group of Supplier business entity. . . . 28
Risk Questions field group of Supplier business entity. . . . 29
Segment field group of Supplier business entity. . . . 30
Social Media field group of Supplier business entity. . . . 30
Sourcing Manager field group of Supplier business entity. . . . 30
Stock field group of Supplier business entity. . . . 31
Supplier Alerts field group of Supplier business entity. . . . 31
Tax field group of Supplier business entity. . . . 32
Contact business entity model. . . . 32
General fields of Contact business entity. . . . 33
Address field group of Contact business entity. . . . 34
Email field group of Contact business entity. . . . 35
Identifier field group of Contact business entity. . . . 36
Phone field group of Contact business entity. . . . 37
Social Media field group of Contact business entity. . . . 38
Status field group of Contact business entity. . . . 39

Chapter 3: Manage records. . . . 40

Record validation. . . . 40
Dynamic fields. . . . 41
Inheritance of dynamic field definitions. . . . 41
URL fields. . . . 41
Rules and guidelines for using URLs. . . . 42
Managing drafts. . . . 42
Creating records. . . . 43
Creating a contact record. . . . 44
Creating a supplier record. . . . 47
Applying rich text formatting to text values. . . . 49
Enriching records. . . . 52
Enriching and validating drafts. . . . 54
Adding a related record scenario. . . . 54
Adding a related record to an existing record. . . . 55
Finding records. . . . 56
Using the search box to find records. . . . 56
Using filtered search to find records. . . . 59
Search Results page. . . . 60
Filtering search results. . . . 62
Managing saved searches and templates. . . . 65
Exporting search results. . . . 67
Searching for records with localized picklist values. . . . 70
Editing records. . . . 70

Editing a record scenario. . . . 71
Editing a single record. . . . 71
Inapplicable dynamic fields. . . . 72
Enriching an existing record. . . . 72
Edit multiple records in a table. . . . 74
Editing multiple records individually. . . . 79
Editing multiple records in bulk. . . . 80
Delete records. . . . 81
Viewing data quality status of a record. . . . 82
Restore records. . . . 84
Viewing the history of records. . . . 85
Exploring the lineage of records. . . . 88
Viewing source record details. . . . 90
Choosing records for the match process 92

Chapter 4: Manage dashboards. . . . 93

Predefined dashboards. . . . 93
Match Analysis and Explainability dashboard 93
Overview tab. . . . 94
Outcome tab. . . . 100
Source System tab. . . . 105
Match Model tab. . . . 111
Match Keys Hotspot tab. . . . 124
Large Clusters tab. . . . 126
Usage Statistics dashboard. . . . 137
Creating custom dashboards. . . . 138
Creating a custom dashboard. . . . 139
Limits on custom dashboards. . . . 139
Adding a predefined dashboard. . . . 139
Sharing dashboards. . . . 140
Sharing a dashboard. . . . 140
Notifications on shared dashboards. . . . 140
Viewing dashboards. . . . 141
Viewing chart details. . . . 141
Viewing predefined dashboards. . . . 142
Editing dashboards. . . . 142
Editing dashboards. . . . 142
Deleting dashboards. . . . 143
Copying dashboards. . . . 143
Adding a widget. . . . 143
Editing a widget. . . . 144
Removing a widget. . . . 145
Editing a custom chart. . . . 145

Chapter 5: Manage reports. 147

Custom report types. 147
Reports based on master records. 148
Reports based on record metadata. 149
Rules and guidelines for creating a custom report. 149
Creating custom reports. 150
Create custom reports based on master records. 150
Create custom reports based on records with validation errors. 152
Create custom reports based on merge history activity 153
Add a chart to the custom report. 155
Viewing reports. 156
Viewing report details. 157
Data set in reports. 157
Exporting reports 158
Exporting report data for merge history activity reports. 158
Finding reports. 159
Editing reports. 159
Deleting reports. 160
Adding a widget to a record. 160

Chapter 6: Establish the best version of the truth. 161

Override survivorship. 161
Overriding values of a master record. 162
Removing an overridden field value. 163
Unmerge source records. 164
Unmerging source records. 164
Merge master records. 165

Chapter 7: Import and match data. 168

Import all data. 168
Prerequisites for importing all data. 169
Import type. 171
Import process 182
Field mapping. 183
Uploading a file. 185
Mapping fields. 187
Previewing and importing data. 188
Match and export data. 189
Prerequisites for matching and exporting data. 189
Matching and exporting data. 189
Match and import selected data. 193
Prerequisites for matching and importing selected data. 193

Matching and importing selected data. . . . 193

Chapter 8: Manage hierarchical and non-hierarchical relationships. 200

Managing hierarchical relationships. . . . 200
Creating and configuring a hierarchy. . . . 202
Viewing hierarchies. . . . 204
Adding a record to a hierarchy. . . . 205
Removing a record from a hierarchy. . . . 205
Assigning records to hierarchy nodes. . . . 206
Moving hierarchy records. . . . 207
Deleting a hierarchy. . . . 218
Editing hierarchy properties. . . . 218
Refreshing hierarchies. . . . 219
Managing non-hierarchical relationships. . . . 219
Records related with a relationship. . . . 219
Records related with a business entity record field. . . . 222

Chapter 9: Manage tasks and tickets. 225

Review tasks in the workflow inbox. . . . 225
Viewing tasks. . . . 227
Claiming a task. . . . 229
Resolving a task. . . . 230
Viewing the status of closed tasks. . . . 236
Finding tasks. . . . 236
Enrichment and validation in approval workflows. . . . 237
Review tasks in the task inbox. . . . 238
Task inbox. . . . 239
Assigning tasks. . . . 240
Claiming and resolving tasks. . . . 240
Viewing the workflow status. . . . 246
View tickets in the ticket manager. . . . 247
Ticket manager. . . . 247

Chapter 10: Monitor jobs. 249

My Jobs page. . . . 249
Managing your job instances. . . . 251
Customizing the My Jobs page. . . . 251
Viewing specific job details. . . . 251
Resolve long-running operations job. . . . 252
Stopping a job. . . . 253
Monitoring queued jobs. . . . 253
Monitoring bulk edit jobs. . . . 253
Bulk Edit step. . . . 254

Index for Search step. . . . 254
Generate Tokens step. . . . 255

Chapter 11: Use CLAIRE Copilot for Supplier 360 SaaS. . . . 256

Getting started with CLAIRE Copilot. . . . 256
CLAIRE Copilot features. . . . 257
Enable CLAIRE generative AI services. . . . 257
Open CLAIRE Copilot and start a conversation. . . . 258
Ask questions about the Informatica help. . . . 259
Leave feedback. . . . 259
Clear conversation memory. . . . 259
Discover assets. . . . 260
Data discovery prerequisites. . . . 260
Data discovery sample prompts. . . . 260
Explore metadata of assets. . . . 263
Metadata exploration prerequisites. . . . 263
Metadata exploration sample prompts. . . . 263
Explore source data of assets. . . . 266
Data exploration prerequisites. . . . 266
Data exploration examples. . . . 267
Product experience agent. . . . 270
Product experience agent skills. . . . 271
Enriching records through data extraction 271
Enriching a record using on-request objectives. . . . 273
Classifying records. . . . 276
Guidelines for using the product experience agent. . . . 280

Appendix A: Keyboard shortcuts. . . . 282

Index. . . . 284

Preface

Use *CLAIRE Copilot for Supplier 360 SaaS* to learn how to use natural language prompts to find and view records in Supplier 360 SaaS. You can also learn how to explore, view, and understand the metadata of a business entity.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introducing Supplier 360 SaaS

With Supplier 360 SaaS, business users can achieve the following goals:

- Create reports and dashboards.
- Create, view, and edit suppliers and contacts.
- Verify address, email address, and phone numbers when you enter them.
- Approval workflows to approve or reject suppliers and contacts.
- View the chronology of updates to a record over the lifespan of the record.
- Create hierarchies and relationships and visualize them in a relationship graph.

To use Supplier 360 SaaS, your organization must have the appropriate license.

Play the following videos that demonstrate how to use Supplier 360 SaaS:

Video	Description
	Find the records that you want to view and edit across business entities. You can filter and sort the search results to refine them. Learn more >
	Create supplier records with ease using Supplier 360 SaaS. You can capture the supplier details using the Contact or Supplier business entities. The master supplier data helps make better business decisions and manage supplier relationships. Learn more >
	Import supplier data in bulk from an external CSV file into Supplier 360 SaaS. The import system uses smart mapping to automatically map the possible columns of the source file to suitable target business fields. Learn more >
	Enhance the quality and consistency of your supplier data when you add or import data into Supplier 360 SaaS. For example, Supplier 360 SaaS standardizes the date formats and validates email addresses before saving the data that you add. Learn more >
	Make your data that might originate from multiple source systems relevant and actionable by resolving duplicates. Supplier 360 SaaS matches records from multiple sources to identify duplicates. Easily review and merge the duplicates into a single trusted, master record. Learn more>
	Understand data lineage by viewing the source records associated with master records. Also, maintain data accuracy by identifying and unmerging source records that are incorrectly merged into master records. Learn more >

Video	Description
	Show how records are related to other records by creating a hierarchy and defining hierarchical relationships between records. You can view the hierarchies that records are part of and the hierarchical relationships for records. Learn more >
	Ensure that changes to your data are accurate by monitoring, managing, and working on task workflows. Tasks include data changes to a record and actions that you can take to move the changes through a workflow. Use filters to identify tasks that need your attention. Learn more >

Key concepts

To work effectively in Supplier 360 SaaS, you need a basic understanding of master data management concepts of Informatica.

Business entities

A business entity is an entity of importance to your organization. Business entities can be people, places, or things.

Supplier 360 SaaS includes the following predefined business entities:

- Supplier. Contains fields that can store details of suppliers.
- Contact. Contains fields that can store the details of people who act as point of contact for suppliers.

Source records

A source record is a record from a source system. Source records from multiple source systems can contribute data to the master records.

Patch records

MDM SaaS creates a patch record when you edit a master record through the user interface, API, or batch jobs. A patch record acts as a source record, but it contains only the master record fields that are edited. If the same master record is edited multiple times, the patch record contains the latest changes.

Patch records are created for each source system. For example, when you edit a master record from the user interface, a patch record is created for the default source system. However, when you edit a master record value that originated from the Salesforce source system, another patch record is created for the Salesforce source system.

Related records

Records that have relationships with the first-level nodes. Relationships describe the connection between two records. For example, if John Smith is a contact of a supplier PQR Internationals, the contact record of John Smith can be related to the PQR Internationals supplier record.

Workflows and tasks

A workflow consists of a sequence of tasks and ensures approvers review and approve the data before it becomes master data. When a user creates or updates a record, the action can trigger a workflow.

A workflow consists of multiple tasks linked together. A task is an activity that must be completed, such as accepting or rejecting an edited record.

Hierarchies

A hierarchy contains hierarchy relationships between records. Create hierarchies to show how records are related to one another. A record can appear in multiple hierarchies.

The hierarchy relationships that you can create depend on your configured hierarchy models.

Extensions

An extension is a package of pre-configured assets to accelerate the implementation of a business application and extend its capabilities. An extension is available for installation on request.

Based on your requirements, you can use an extension to achieve the following goals:

- Synchronize records from third-party source systems with MDM SaaS in batches or real-time.
- Consolidate, validate, and enrich records in MDM SaaS.
- Manage and view relationships between multiple business entities.
- Generate reports to view the important aspects of master data.

For example, you can use the ESG extension to manage supplier ESG risk in Supplier 360.

Home page

After you log in to Supplier 360 SaaS, you see the **Home** page. The **Home** page is your dashboard that displays a collection of charts. You can add charts to the dashboard as widgets. You can add or remove widgets to customize the dashboard.

Dashboard

You can view a visual summary of your data as charts on your dashboard. You can add the predefined and custom charts as widgets to the dashboard.

For more information about the dashboard, see *Manage Dashboard*.

Widgets

A widget is a placeholder user interface element for reports. You can add, edit, or remove a widget to customize the dashboard layout. For more information about the widgets, see *Manage Dashboard*.

Charts

Charts summarize and display data visually. Charts make it easier to analyze data and make crucial business decisions. For example, a user can view area-wise distributors for a supplier in a geographical region.

You can create custom charts. Charts use reports to display data. For more information about adding charts to the dashboard, see *Manage Dashboard*.

Reports

A report is a tabular representation of data. You can visualize the reports as charts. You can use predefined reports or create a custom report to display information about your records. For more information about reports, see *Manage Reports*.

Editing your user profile

Your user profile contains the details of your Intelligent Data Management Cloud user account.

To edit your user profile:

1. Click the **User** icon in the top right corner of the Informatica Intelligent Cloud Services window and then select **Profile**.
2. On the **Profile** page, specify the following details:
   - Email address
   - Time zone (used in the job execution time stamps on the **My Jobs** page.
   - Password
   - Security question
3. Optionally, change your password or security question.
4. Click **Save**.

Date and time values

The date and time values in the user interface use the date and time format that the browser locale uses.

The following table lists the date and time formats that the Supplier 360 SaaS pages use:

Page	Date and Time Format	Example
My Jobs	MMM dd, yyyy h:mm:ss TT	Apr 21, 2014 6:30:00 AM
Search	Long	04/21/2024 6:30:00 AM
Edit in Bulk	Long	04/21/2024 6:30:00 AM
Record Details	Long	04/21/2024 6:30:00 AM

Page	Date and Time Format	Example
Source Records	Long	04/21/2024 6:30:00 AM
Related Records	Long	04/21/2024 6:30:00 AM
Hierarchy	Long	04/21/2024 6:30:00 AM
Relationship Graph	Long	04/21/2024 6:30:00 AM
History	Short	21 Apr 2024 06:30
Reports	Short	21 Apr 2024 06:30
Workflow Inbox	Long	04/21/2024 6:30:00 AM
File Import	Long	04/21/2024 6:30:00 AM
CLAIRE panel	Long	04/21/2024 6:30:00 AM

The following table lists the browser locales and their long and short date and time formats:

Browser Locale	Language	Long Format	Short Format
en	English	MM/dd/yyyy, h:mm:ss TT	MMM dd, yyyy, h:mm TT
en_AU	English (Australia)	dd/MM/yyyy, h:mm:ss TT	dd MMM yyyy, h:mm TT
es	Spanish	dd/MM/yyyy, h:mm:ss	dd MMM yyyy, H:mm
fr	French	dd/MM/yyyy HH:mm:ss	dd MMM yyyy, HH:mm
de	German	dd.MM.yyyy, HH:mm:ss	dd.MMM yyyy, HH:mm
pt	Portuguese	dd/MM/yyyy, HH:mm:ss	dd/MMM/yyyy, HH:mm
pt-BR	Portuguese (Brazil)	dd/MM/yyyy, HH:mm:ss	dd/MMM/yyyy, HH:mm
ru	Russian	dd.MM.yyyy, HH:mm:ss	dd MMM yyyy г., HH:mm
ja	Japanese	yyyy/MM/dd H:mm:ss	yyyy 年 M 月 dd 日 H:mm
ko	Korean	yyyy/MM/dd H:mm:ss	yyyy년 MMM dd일 a h:mm
th	Thai	dd/MM/yyyy HH:mm:ss	dd MMM yyyy HH:mm
zh-CN	Chinese (Simplified, China)	yyyy/MM/dd HH:mm:ss	yyyy 年 M 月 dd 日 HH:mm
nl	Dutch	dd-MM-yyyy, HH:mm:ss	dd MMM yyyy, HH:mm

Note: The English (Australia) locale uses the short date and time format.

CHAPTER 2

Supplier 360 SaaS data dictionary

The data dictionary provides the metadata to understand the data model of Supplier 360 SaaS. The data model of Supplier 360 SaaS includes the Supplier and Contact business entities. The data dictionary lists the fields and field groups that the business entities contain and explains the properties of the fields.

Supplier business entity model

Supplier business entity stores information about a supplier. This business entity contains some basic fields and some field groups.

General fields of Supplier business entity

The general fields store some basic information about a supplier organization such as name and date of incorporation.

The following table lists the general fields that the Supplier business entity contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Business Type	businessType	Lookup	NA	BusinessType	Type of business. For example, asset based or non-asset based.
Company Code	companyCode	Text	255	NA	Company code of the supplier organization.
Company Logo	companyLogo	Text	255	NA	URL of the image for the supplier organization.
Currency Type	currencyType	Lookup	NA	Currency	Currency in which the financial information is provided.
Date of Incorporation	dateOfIncorporation	Date	NA	NA	Date of incorporation of the supplier organization.
DUNS Number	dunsNumber	Text	255	NA	DUNS number of the supplier organization.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Industry Type	industryType	Lookup	NA	IndustryType	Type of industry. For example, agriculture, banking, chemicals, or communication.
NAICS Code	naicsCode	Text	255	NA	North American Industry Classification System code of the supplier organization.
Name	name	Text	255	NA	Name of the supplier organization.
Number of Employees	numberOfEmployees	Integer	NA	NA	Total number of employees in the supplier organization.
Online Catalog Flag	onlineCatalogFlag	Boolean	NA	NA	Indicates whether the supplier organization provides an online catalog.
Online Sell Flag	onlineSellFlag	Boolean	NA	NA	Indicates whether the supplier sells online.
Ownership Type	ownershipType	Lookup	NA	OwnershipType	Type of ownership for the supplier organization. For example, cooperative, private, public, or self-owned.
SIC Code	sicCode	Text	255	NA	Standard Industrial Classification code of the supplier organization.
Supplier Type	supplierType	Lookup	NA	SupplierType	Type of supplier. For example, manufacturers, exporters, or distributors.
Web Address	webAddress	Text	255	NA	Website of the supplier organization.

Address field group of Supplier business entity

The Address field group stores the postal addresses of suppliers. Postal address is a physical address associated with the supplier organization. A supplier organization can have multiple addresses.

The following table describes the fields that the Address field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Line 1	addressLine1	Text	200	NA	Line 1 of the postal address.
Address Line 2	addressLine2	Text	200	NA	Line 2 of the postal address.
Address Line 3	addressLine3	Text	200	NA	Line 3 of the postal address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Status	addressStatus	Lookup	NA	AddressStatus	Status of the address. For example, active or inactive.
Address Type	addressType	Lookup	NA	AddressType	Type of postal address. For example, office, or shipping.
City	city	Text	50	NA	City of the postal address.
Coordinate System	coordinateSystem	Text	100	NA	Coordinate system used to determine the location of the address.
Country	country	Lookup	NA	Country	Country of the postal address.
County	county	Text	50	NA	County of the postal address.
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the postal address is the default address.
End Date	effectiveEndDate	Date and Time	NA	NA	Expiry date of the address.
Enriched Indicator	enrichedIndicator	Lookup	NA	AddressEnriched Indicator	Validation status of the address. For example, error, valid, or not validated.
Latitude	latitude	Text	20	NA	Latitude for the address.
Location Coordinate Desc	locationCoordinate Desc	Text	50	NA	Location of the address using coordinate system.
Longitude	longitude	Text	20	NA	Longitude for the address.
Postal Code	postalCode	Text	10	NA	Postal code of the address.
Postal Code Extension	postalCodeExtensio n	Text	10	NA	Postal code extension of the address.
Start Date	effectiveStartDate	Date and Time	NA	NA	Start date from when the address is active.
State	state	Lookup	NA	State	State of the postal address.
Usage Type	usageType	Lookup	NA	AddressUsageTy pe	Usage type. For example, business or personal.
Verification Message	statusMessage	Text	255	NA	Validation message that the address verification service returns.
Verification Status Code	statusCode	Text	10	NA	Validation status that the address verification service returns.

Alternate Names field group of Supplier business entity

The Alternate Names field group stores the alternate names related information, such as alternate name, effective start date, and effective end date. A supplier might use different names, such as legal name, alias, and trading name. An alternative name might be active during a particular time.

The following table describes the fields that the Alternate Names field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Alternate Name	alternateName	Text	255	NA	Alternate name of the supplier organization.
Effective End Date	effectiveEndDate	Date	NA	NA	Expiry date of the alternate name.
Effective Start Date	effectiveStartDate	Date	NA	NA	Start date from when the alternate name is valid.
Name Type	nameType	Lookup	NA	AlternateNameType	Alternate name type of the supplier organization. For example, doing business as name, alias, legal name, or previous name.

Bank Details field group of Supplier business entity

The Bank Details field group stores the bank related information, such as account number, account holder, and branch of the contact.

The following table describes the fields that the Bank Details field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Account Type	accountType	Lookup	NA	NA	Type of bank account, such as savings account or current account.
Account Holder	accountHolder	Text	50	NA	Bank account holder's name.
Branch Name	branchName	Text	255	NA	Name of the branch in which the supplier organization has the account.
Account Number	accountNumber	Text	50	NA	Bank account number of the supplier organization.
Account Status	accountStatus	Lookup	NA	NA	Status of the bank account, such as active or inactive.
Bank Name	bankName	Text	255	NA	Name of the bank.
SWIFT	swift	Text	50	NA	Society for Worldwide Interbank Financial Telecommunication code.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
IBAN	iban	Text	50	NA	International Bank Account Number.
Country	country	Lookup	NA	NA	Country of the bank account.
Branch Number	branchNumber	Text	50	NA	Branch number of the bank.
Check Digit	checkDigit	Text	50	NA	Error detection on identification numbers, such as bank account numbers.
Primary Indicator	primaryIndicator	Boolean	NA	NA	Indicates whether the bank account is the primary account.
Effective Start Date	effectiveStartDate	Date	NA	NA	Start date from when the bank account is valid.
Effective End Date	effectiveEndDate	Date	NA	NA	Expiry date of the bank account.

Contract field group of Supplier business entity

The Contract field group stores contract related information, such as the order number, quality, transit risk, shipment completion method, and payment type.

The following table describes the fields that the Contract field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Agreement Confidentiality	agreementConfidentiality	Boolean	NA	NA	Indicates whether the contract agreement is confidential.
Agreement Date	agreementDate	Date	NA	NA	Date when the contract agreement is drawn.
Arbitration	arbitration	Boolean	NA	NA	Indicates whether arbitration is applicable to the contract.
Country	country	Lookup	NA	Country	Country code of the contract.
Currency	currency	Lookup	NA	Currency	Currency that is specified in the contract.
Delivery Responsibility	deliveryResponsibility	Lookup	NA	DeliveryResponsibilityType	Delivery responsibility of the contract, such as customer will arrange delivery or supplier will arrange delivery.
Discount Avail	discountAvail	Boolean	NA	NA	Indicates whether discount is available for the contract.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective End Date	effectiveEndDate	Date	NA	NA	Effective end date of the contract.
Effective Start Date	effectiveStartDate	Date	NA	NA	Effective start date of the contract.
Force Majeure	forceMajeure	Boolean	NA	NA	Indicates whether the force majeure provision is applicable to the contract.
Language	language	Lookup	NA	Language	Language in which the contract is written.
Order Number	orderNumber	Text	255	NA	Order number of the contract.
Payment Method	paymentMethod	Lookup	NA	PaymentMethod Type	Payment method, such as cash, cheque, direct debit, or file electronic transfer.
Payment Type	paymentType	Lookup	NA	PaymentType	Payment type of the contract, such as several installment payments or single lump sum payment.
Purchasing Org Code	purchaseOrgCode	Lookup	NA	PurchaseOrgCod eType	Code of the purchasing organization.
Quality	quality	Text	255	NA	Quality requirements of the product or service contract.
Return Remedy Period	returnRemedyPerio d	Text	255	NA	Return remedy period of the contract.
Return Responsibility	returnResponsibilit y	Lookup	NA	ReturnResponsib ilityType	Return responsibility of the contract, such as customer will take responsibility for returns, or supplier will take responsibility for returns.
Shipment Completion Type	shipmentCompletio nType	Lookup	NA	ShipmentCompl etionType	Shipment completion type of the contract, such as upon delivery of goods to the final destination or upon delivery of goods to the shipping company.
State Law Applied	stateLawApplied	Boolean	NA	NA	Indicates whether the state law is applicable to the contract.
Transferability	transferability	Boolean	NA	NA	Indicates whether the contract is transferable.
Transit Risk	transitRisk	Text	255	N	Transit risk factors of the contract, such as loss of goods.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Tax Responsibility	taxResponsibility	Lokkup	NA	TaxResponsibilityType	Tax responsibility of the contract, such as customer will take responsibility for tax, do not include tax provision, or supplier will take responsibility for tax.
Violation Grace Period	violationGracePeriod	Text	255	NA	Violation grace period of the contact.
Warranty	warranty	Text	255	NA	Warranty of the contract.

Diversity field group of Supplier business entity

The Diversity field group stores diversity related information, such as diversity status and diversity type.

The following table describes the fields that the Diversity field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Diversity Status	diversityStatus	Boolean	NA	NA	Indicates whether the supplier organization is diverse.
Diversity Type	diversityType	Lookup	NA	DiversityType	Diversity type of the supplier organization. For example, minority business enterprise, small disadvantaged business, or women business enterprise.

Documents field group of Supplier business entity

The Documents field group stores the document related information, such as bank statement, qualification certificate, and proof of business existence.

The following table describes the fields that the Documents field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Document Link	documentLink	Text	255	NA	URL to access the document.
Document Name	documentName	Lookup	NA	DocumentType	Name of the document.
Document Type	documentType	Text	255	NA	Type of document.
File Name	fileName	Text	255	NA	Name of the file.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Valid From	validFrom	Date	NA	NA	Date from when the document is valid.
Valid To	validTo	Date	NA	NA	Date until when the document is valid.

Email field group of Supplier business entity

The Email field group stores information about the electronic addresses, such as email addresses.

The following table describes the fields that the Email field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the address is the default address.
Effective End Date	effectiveEndDate	Date and Time	NA	NA	End date for the electronic address.
Effective Start Date	effectiveStartDate	Date and Time	NA	NA	Start date for the electronic address.
Electronic Address	electronicAddress	Text	255	NA	Electronic address of the supplier organization.
Electronic Address Status	electronicAddressStatus	Lookup	NA	ElectronicAddressStatus	Status of the email address. For example, active, blocked, or not in use.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Indicates whether the email verification service verified the electronic address.
Hygiene Status	hygieneStatus	Text	50	NA	Hygiene status for the electronic address. For example, safe to send, invalid, or spam.
Net Protect Code	netProtectCode	Text	50	NA	Net protect codes identify which service or appliance is monitoring a given network.
Usage Type	usageType	Lookup	NA	ElectronicAddressUsageType	Intended use or purpose of the electronic address. For example, business, work, or personal.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Verification Status Code	validationStatusCode	Text	50	NA	Validation status of the electronic address.
Verification Message	validationMessage	Text	50	NA	Message that the email validation service generates to indicate how valid and trusted the address is.

Executive Members field group of Supplier business entity

The Executive Members field group stores the executive members-related information, such as company name, business title, and executive type.

The following table describes the fields that the Executive Members field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Business Title	businessTitle	Text	255	NA	Business title for the executive member.
Company Name	companyName	Text	255	NA	Company name of the executive member.
Executive Type	executiveType	Lookup	NA	ExecutiveType	Type of the executive member. For example, Board of Directors, Chief Executive Officer, Chief Financial Officer, or Managing Director.
Full Name	fullName	Text	50	NA	Full name of the executive member of the supplier organization.

Financial field group of Supplier business entity

The Financial field group stores financial information of a supplier organization, such as currency, unit, and financial reliability.

The following table describes the fields that the Financial field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Amount	amount	Double	NA	NA	Total value of the finance.
Currency	currency	Lookup	NA	Currency	Currency in which the financial information is collected.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Finance Info Type	financeInfoType	Lookup	NA	FinanceInfoType	Type of financial information. For example, equity, annual income, or debt.
Finance Reliability	financeReliability	Lookup	NA	FinanceReliability	Reliability of the financial data. For example, actual or estimate.
Time Period	timePeriod	Text	255	NA	Finance period for which the data is collected.
Time Period Type	timePeriodType	Lookup	NA	TimePeriodType	Type of the finance period. For example, quarterly or yearly.
Unit	unit	Lookup	NA	FinancialUnit	Unit of the amount. For example, thousands, millions, or billions.

Identifier field group of Supplier business entity

The Identifier field group stores the identifier related information of a supplier organization, such as tax numbers, D-U-N-S number or National Provider Identifier (NPI) numbers for healthcare providers.

The following table describes the fields that the Identifier field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective End Date	effectiveEndDate	Date	NA	NA	Expiry date of the identifier.
Effective Start Date	effectiveStartDate	Date	NA	NA	Issued date of the identifier.
Identifier Type	identifierType	NA	NA	OrganizationIdentifierType	Type of identifier.
Identifier Value	identifierValue	Text	50	NA	Value of identifier, such as D-U-N-S number or National Provider Identifier.
Issuing Authority	issuingAuthority	Lookup	NA	IssuingAuthority	Authority that has issued the identifier to the supplier organization.
Status	status	Lookup	NA	IdentifierStatus	Status of the alternate identifier. For example, effective, disqualified, expired, or temporary.

Insurance field group of Supplier business entity

The Insurance field group stores the insurance-related information, such as the name of the insurance provider, the policy number, the insurance type, and the validity.

The following table describes the fields that the Insurance field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Currency	currency	Lookup	NA	Currency	Currency in which the supplier organization is insured.
Effective End Date	effectiveEndDate	Date	NA	NA	Expiry date of the insurance.
Effective Start Date	effectiveStartDate	Date	NA	NA	Start date of the insurance.
Insurance Holder	insuranceHolder	Text	255	NA	Name of the insurance holder.
Insurance Provider	insuranceProvider	Text	255	NA	Company that provides the insurance.
Insurance Type	insuranceType	Lookup	NA	InsuranceType	Type of insurance, such as cargo insurance, casualty, commercial auto, or shipping.
Policy Number	policyNumber	Text	100	NA	Policy number of the insurance.
Status	status	Text	255	NA	Status of the insurance. For example, active or expired.
Sub Type	subType	Lookup	NA	InsuranceSubType	Insurance subtype. For example, if the insurance type is group, the subtypes might be extended lenders mortgage, family health gold, mediexcel horizon, or platinum travel.
Unit	unit	Lookup	NA	FinancialUnit	Unit for the amount. For example, billion, million, or thousand.
Value	value	Double	NA	NA	Amount insured.

Phone field group of the Supplier business entity

The Phone field group stores the phone details, such as phone number, phone number extension, and phone type.

The following table describes the fields that the Phone field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Cell Prefix	cellPrefix	Text	1	NA	Prefix that must prepend the National Significant Number for inbound international calls.
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the phone number is the default phone number.
Do Not Call Indicator	doNotCallIndicator	Boolean	NA	NA	Indicates whether the supplier is interested to receive unsolicited phone calls from marketers.
Effective End Date	effectiveEndDate	Date	NA	NA	Date until when the phone number was active or will be active.
Effective Start Date	effectiveStartDate	Date	NA	NA	Date from when the phone number is active.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Indicates whether the phone number validation service verified the phone number.
International Format	internationalFormat	Text	50	NA	International format for the phone number.
International Prefix	internationalPrefix	Text	3	NA	Prefix used to select an international telephone circuit.
ISO	iso	Text	2	NA	ISO country code.
National Destination Code	nationalDestinationCode	Text	10	NA	Code that identifies a numbering area within a country or a group of countries.
National Format	nationalFormat	Text	50	NA	National format for the phone number.
National Prefix	nationalPrefix	Text	255	NA	Digit or combination of digits which must be dialed before an area or city code.
NDC Indicator	nationalDestinationCodeIndicator	Boolean	NA	NA	Indicates whether the phone number includes the National Destination Code.
Phone Number	phoneNumber	Text	20	NA	Phone number of the supplier organization.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Phone Number Extension	phoneNumberExtension	Text	10	NA	Extension to phone number.
Phone Type	phoneType	Lookup	NA	PhoneType	Type of phone. For example, cell, fax, freephone, landline, mobile, or pager.
Phone Usage Type	phoneUsageType	Lookup	NA	PhoneUsageType	Usage type of the phone. For example, business, customer service - group market, customer service toll free - individual market, or small group market.
Prefix Number	prefixNumber	Text	3	NA	Country dialing code.
Status	status	Lookup	NA	PhoneStatus	Status of the phone number, such as the phone number is publicly available or active.
Verification Status Code	validationStatusCode	Text	50	NA	Validation status that the phone number validation service returns.
Verification Message	validationMessage	Text	255	NA	Validation message that the phone number validation service returns.

Reference Details field group of Supplier business entity

The Reference Details field group stores the reference details, such as company name, contact name, and company contact number.

The following table describes the fields that the Reference Details field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Company Name	companyName	Text	255	NA	Name of the reference organization.
Contact Name	contactName	Text	255	NA	Name of the contact in the reference organization.
Contact Number	contactNumber	Text	255	NA	Contact number of the reference organization.

Risk Questions field group of Supplier business entity

The Risk Questions field group stores information about risk-related questions.

The following table describes the fields that the Tax field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Anti-Bribery - Will the supplier interact with government officials on behalf of the buyer?	question1	Boolean	NA	NA	Indicates whether the supplier organization interacts with government officials on behalf of the buyer.
Personally Identifiable Information - Will the supplier process or store personal information of any of the buyer's employees or customers?	question2	Boolean	NA	NA	Indicates whether the supplier organization processes or store personal information of any of the buyer's employees or customers.
Protected Health Information - Will the supplier collect and store data relating to health of any of the buyer's employees or customers?	question3	Boolean	NA	NA	Indicates whether the supplier organization collects and store data relating to health of the buyer's employees or customers.
Will the supplier interact with customers or provide any customer-facing services?	question4	Boolean	NA	NA	Indicates whether the supplier organization interacts with customers or provides any customer-facing services.

Segment field group of Supplier business entity

The Segment field group stores the segment related information, such as segment type and segment name.

The following table describes the fields that the Segment field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Segment Name	segmentName	Lookup	NA	SegmentValue	Supplier segment name.
Segment Type	segmentType	Lookup	NA	SegmentType	Segment type of the supplier organization. For example, region or supplier criticality.

Social Media field group of Supplier business entity

The Social Media field group stores information about the social media identifiers of a supplier organization.

The following table describes the fields that the Social Media field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Social Media Handle	socialMediaHandle	Text	255	NA	Social media identifier or name of the supplier organization.
Social Media Type	socialMediaType	Lookup	NA	SocialHandleType	Type of social media platform. For example, Facebook or Twitter.

Sourcing Manager field group of Supplier business entity

The Sourcing Manager field group stores the sourcing manager related information, such as name and employee ID.

The following table describes the fields that the Sourcing Manager field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Employee ID	sourcingManagerEmployeeId	Text	255	NA	Employee ID of the sourcing manager.
Name	sourcingManagerName	Text	255	NA	Name of the sourcing manager.

Stock field group of Supplier business entity

The Stock field group stores the stock related information, such as ticker symbol, exchange name, and country.

The following table describes the fields that the Stock field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	country	Lookup	NA	Country	Country where the stock exchange is located.
Exchange Name	exchangeName	Text	255	NA	Name of the stock exchange that trades the shares of the supplier organization.
Ticker Symbol	tickerSymbol	Text	255	NA	Abbreviation used to identify the publicly traded shares of the organization.

Supplier Alerts field group of Supplier business entity

The Supplier Alerts field group stores information, such as message, message type, and external link.

The following table describes the fields that the Supplier Alerts field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective End Date	effectiveEndDate	Date	NA	NA	Expiry date of the supplier alert.
Effective Start Date	effectiveStartDate	Date	NA	NA	Start date of the supplier alert.
External Link	externalLink	Text	255	NA	External link to the supplier alert message.
Message	message	Text	255	NA	Supplier alert message.
Message Type	messageType	Text	255	NA	Type of supplier alert message.

Tax field group of Supplier business entity

The Tax field group stores tax-related information, such as the taxpayer type, tax authority, taxpayer identification number, and amount of tax paid of the supplier organization.

The following table describes the fields that the Tax field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	country	Lookup	NA	Country	Country of taxation.
Currency	currency	Lookup	NA	Currency	Currency in which the tax is paid.
Effective End Date	effectiveEndDate	Date	NA	NA	End date of the tax period.
Effective Start Date	effectiveStartDate	Date	NA	NA	Start date of the tax period.
State	state	Lookup	NA	State	State within the country of taxation.
Tax Authority	taxAuthority	Lookup	NA	TaxAuthority	Tax authority. For example, Internal Revenue Service (IRS) or HM Revenue and Customs (HMRC).
Tax Number	taxNumber	Text	50	NA	Unique number that identifies the supplier organization for tax purposes.
Tax Number Type	taxNumberType	Lookup	NA	TaxNumberType	Type of the tax number. For example, tax number can be Individual Taxpayer Identification Number (ITIN) or Social Security Number.
Tax Paid	taxPaid	Text	50	NA	Tax amount that the supplier organization has paid.
Tax Payer Type	taxPayerType	Lookup	NA	TaxPayerType	Type of tax payer. For example, business entity, estate, or individual.

Contact business entity model

Contact business entity stores information about a contact person. This business entity contains some basic fields and some field groups.

General fields of Contact business entity

The general fields store basic information about a contact, such as name and job title.

The following table lists the general fields that the Contact business entity contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
First Name	firstName	Text	255	NA	First name of the contact.
Middle Name	middleName	Text	255	NA	Middle name of the contact.
Last Name	lastName	Text	255	NA	Last name of the contact.
Full Name	fullName	Text	255	NA	Full name of the contact.
Prefix Name	prefixName	Lookup	NA	PrefixName	Prefix for the name of the contact. For example, Dr, Mr, or Mrs.
Suffix Name	suffixName	Lookup	NA	NA	Suffix name of the contact. For example, Sr, Jr, II, or III.
Gender	gender	Lookup	NA	Gender	Gender of the contact.
Birth Date	birthDate	Date	NA	NA	Date of birth of the contact.
Job Title	jobTitle	Lookup	NA	JobTitle	Job title of the contact. For example, category manager, demand planner, or quality manager.
Department	department	Lookup	NA	DepartmentType	Department of the contact. For example, finance, logistics, or sales.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Salutation	salutation	Lookup	NA	SalutationType	Salutation of the contact. For example, Sir or Madam.
Language	language	Lookup	NA	Language	Language in which the contact has proficiency.

Address field group of Contact business entity

The Address field group stores the postal addresses of a contact. Postal address is a physical address associated with the contact. A contact can have multiple addresses.

The following table lists the fields that the Address field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the postal address is the default address.
Address Type	addressType	Lookup	NA	AddressType	Type of postal address. For example, office, or shipping.
Usage Type	usageType	Lookup	NA	AddressUsageType	Usage type. For example, business or personal.
Address Status	addressStatus	Lookup	NA	AddressStatus	Status of the address. For example, active or inactive.
Address Line 1	addressLine1	Text	200	NA	Line 1 of the postal address.
Address Line 2	addressLine2	Text	200	NA	Line 2 of the postal address.
Address Line 3	addressLine3	Text	200	NA	Line 3 of the postal address.
City	city	Text	255	NA	City of the postal address.
County	county	Text	255	NA	County of the postal address.
Country	country	Lookup	NA	Country	Country of the postal address.
State	state	Lookup	NA	State	State of the postal address.
Postal Code	postalCode	Text	10	NA	Postal code of the address.
Postal Code Extension	postalCodeExtension	Text	10	NA	Postal code extension of the address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Coordinate System	coordinateSystem	Text	100	NA	Coordinate system used to determine the location of the address.
Location Coordinate Desc	locationCoordinateDesc	Text	50	NA	Location of the address using coordinate system.
Start Date	effectiveStartDate	Date and Time	NA	NA	Start date from when the address is active.
End Date	effectiveEndDate	Date and Time	NA	NA	Expiry date of the address.
Latitude	latitude	Text	20	NA	Latitude for the address.
Longitude	longitude	Text	20	NA	Longitude for the address.

Email field group of Contact business entity

The Email field group stores information about the electronic addresses, such as email addresses.

The following table lists the fields that the Email field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Usage Type	usageType	Lookup	NA	ElectronicAddressUsageType	Intended use or purpose of the electronic address. For example, business, work, or personal.
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the address is the default address.
Electronic Address	electronicAddress	Text	255	NA	Electronic address of the contact.
Electronic Address Status	electronicAddressStatus	Lookup	NA	ElectronicAddressStatus	Status of the email address. For example, active, blocked, or not in use.
Effective Start Date	effectiveStartDate	Date and Time	NA	NA	Start date for the electronic address.
Effective End Date	effectiveEndDate	Date and Time	NA	NA	End date for the electronic address.
Net Protect Code	netProtectCode	Text	50	NA	Net protect codes identify which service or appliance is monitoring a given network.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Validation Status	validationStatusCode	Text	50	NA	Validation status of the electronic address.
Validation Message	validationMessage	Text	50	NA	Message that the email validation service generates to indicate how valid and trusted the address is.
Hygiene Status	hygieneStatus	Text	50	NA	Hygiene status for the electronic address. For example, safe to send, invalid, or spam.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Indicates whether the address verification service verified the electronic address.

Identifier field group of Contact business entity

The Identifier field group stores the identifier related information of a contact, such as social security number, driver's license number, or passport number.

The following table lists the fields that the Identifier field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Identifier Type	identifierType	Lookup	NA	PersonIdentifierType	Type of identifier. For example, driver license number, employee ID, passport number, or social security number.
Identifier Value	identifierValue	Text	255	NA	Value of identifier, such as driver's license number, or passport number.
Issuing Authority	issuingAuthority	Lookup	NA	IssuingAuthority	Authority that has issued the identifier to the contact. For example, Drug Enforcement Administration, Government Agency, or National Association of Insurance Commissioners.
Status	status	Lookup	NA	IdentifierStatus	Status of the identifier. For example, effective, disqualified, expired, or draft.
Effective Start Date	effectiveStartDate	Date	NA	NA	Issue date of the identifier.
Effective End Date	effectiveEndDate	Date	NA	NA	Expiry date of the identifier.

Phone field group of Contact business entity

The Phone field group stores the phone details, such as phone number, phone number extension, and phone type.

The following table lists the fields that the Phone field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the phone number is the default phone number.
Do Not Call Indicator	doNotCallIndicator	Boolean	NA	NA	Indicates whether the contact is interested to receive unsolicited phone calls from marketers.
Phone Usage Type	phoneUsageType	Lookup	NA	PhoneUsageType	Usage type of the phone. For example, personal, business, or customer service.
Phone Type	phoneType	Lookup	NA	PhoneType	Type of phone. For example, landline, mobile, home, or business.
Phone Number	phoneNumber	Text	20	NA	Phone number of the contact.
Phone Number Extension	phoneNumberExtension	Text	10	NA	Extension to phone number.
Prefix Number	prefixNumber	Text	3	NA	Country dialing code.
International Prefix	internationalPrefix	Text	3	NA	Prefix used to select an international telephone circuit.
National Prefix	nationalPrefix	Text	255	NA	Digit or combination of digits which must be dialed before an area or city code.
Cell Prefix	cellPrefix	Text	1	NA	Prefix that must prepend the national significant number for inbound international calls.
Effective Start Date	effectiveStartDate	Date	NA	NA	Date from when the phone number is active.
Effective End Date	effectiveEndDate	Date	NA	NA	Date until when the phone number was active or will be active.
National Destination Code	nationalDestinationCode	Text	10	NA	Code that identifies a numbering area within a country or a group of countries.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
NDC Indicator	nationalDestinationCodeIndicator	Boolean	NA	NA	Indicates whether the phone number includes the national destination code.
National Format	nationalFormat	Text	50	NA	National format of the phone number.
International Format	internationalFormat	Text	50	NA	International format of the phone number.
ISO	iso	Text	2	NA	ISO country code.
Validation Status	validationStatusCode	Text	50	NA	Validation status that the phone number validation service returns.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Indicates whether the phone number validation service verified the phone number.
Validation Message	validationMessage	Text	50	NA	Validation message that the phone number validation service returns.
Status	status	Lookup	NA	PhoneStatus	Status of the phone number, such as the phone number is publicly available or active.

Social Media field group of Contact business entity

The Social Media field group stores social media-related information, such as social media type and social media handle of the contact.

The following table lists the fields that the Social Media field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Social Media Type	socialMediaType	Lookup	NA	SocialHandleType	Type of social media platform. For example, Facebook or Twitter.
Social Media Value	socialMediaValue	Text	255	NA	Social media identifier or name of the contact.

Status field group of Contact business entity

The Status field group stores status related information, such as the status type and status value.

The following table lists the fields that the Status field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Status Type	statusType	Lookup	NA	PersonStatusType	Status type of the contact. For example, primary status.
Status Value	statusValue	Lookup	NA	PersonStatusValue	Status value of the contact. For example, primary status.
Effective Start Date	effectiveStartDate	Date	NA	NA	Effective start date of the contact with the supplier organization.
Effective End Date	effectiveEndDate	Date	NA	NA	Effective end date of the contact with the supplier organization.

CHAPTER 3

Manage records

You can create, find, and edit records, and manage drafts of your changes.

For example, you can create a person record and add person data, such as the personal information and contact details. You can then edit information in the record.

When you create or edit a record, Customer 360 SaaS saves your changes as a draft before you submit the record or send it for approval. You can work on the draft and submit all changes at once. You can view and manage your drafts on the My Drafts page. Drafts are available for 15 days. If other users update the record for which you have a draft, you can synchronize your draft with their updates or resolve any conflicts.

Note: Effective in the October 2026 release, the ability to save changes as drafts, resolve conflicts, and synchronize your draft with updates made by other users is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

To find a record, you can enter a search text in a search box or perform a filtered search.

Record validation

When you create or update records, Supplier 360 SaaS validates the field data. You can fix the validation errors to improve data quality.

If error remediation is enabled for a business entity, Supplier 360 SaaS assigns each record a validation status. Records with data quality issues have the status Validation Error and those without have the status Valid.

If the record status is Validation Errors, but the fields don't display errors, then fields that you aren't permitted to view might have errors.

Note: When you use validation statuses to filter records, incorrect results might appear.

Records with validation errors display messages that are categorized based on severity and type.

Records can display the following types of validation messages:

- Warnings. Minor issues that might not require any immediate fix.
- Information. Information that might be helpful when you add or update values.
- Errors. Issues that impact the quality of data.

- Others. Issues that can't be categorized as information, warnings, or errors, but affect the quality of data.

When error remediation is enabled for a business entity, information and warning messages appear after you save a record. When it's disabled, they appear after you add or edit an entry to a section.

Dynamic fields

Dynamic fields are a set of fields that vary across records of a business entity. Use dynamic fields in scenarios where you require data flexibility based on a relationship. When you use dynamic fields, you can add attributes to individual records without altering the overall business entity.

Consider the Borges Penne and Teddy 5G Mobile records that belong to a business entity, such as Item. Assign the Borges Penne record to the Grocery record and the Teddy 5G Mobile record to the Electronics record in a hierarchy.

The Borges Penne record gets the Allergens and Ingredients fields from the Grocery record, and you can add values for them in the Borges Penne record. Similarly, the Teddy 5G Mobile record gets the Display and Camera fields from the Electronics record, and you can add values for them in the Teddy 5G Mobile record.

You can edit dynamic field values attributes when you edit a record, but you can't when you create one.

Inheritance of dynamic field definitions

When you add dynamic field definitions to a record that belong to a hierarchy, the child records of the record can inherit the dynamic field definitions and their properties. When you update the properties of the dynamic field definition in a child record, it gets disconnected from the parent record. Further updates to the dynamic field definition of the parent record don't affect the child record on an individual definition basis. It ignores updates for the individual definition and not for all definitions.

For example, add a record named Food & Beverages and set the dynamic field definitions to include Allergens and Ingredients. When you add a child record named Pasta & Noodles to the Food & Beverages record, the Pasta & Noodles record inherits the dynamic field definitions, such as Allergens and Ingredients, from the Food & Beverages record. If you update the dynamic field definition properties of the Pasta & Noodles record, the record no longer inherits the updates to the dynamic field definitions from the Food & Beverages record. You can reconnect the Pasta & Noodles record to the Food & Beverages record and inherit the updates to the dynamic field definitions.

URL fields

Add URLs of digital assets, such as images, videos, and documents, in the URL fields.

You can preview digital assets that are images or display URLs for downloading or accessing digital assets from third-party services. The search results can also display thumbnails of digital assets associated with records.

Rules and guidelines for using URLs

Before you add URLs, consider the following rules and guidelines:

- Ensure that the URLs of digital assets you want to use for previews are publicly accessible. If digital assets are on SharePoint, you must be logged in to SharePoint to access the URLs.
- Ensure that the digital assets that you access through URLs are downloadable. The HTTP response of the digital asset must include the Content-Disposition header to prompt the browser to download the file automatically.
- Ensure that digital assets for preview don't exceed 250 KB for optimal loading performance in the user interface.
- To search for records, use only the file names of digital assets that are in English, excluding their URLs. If the file names contain spaces, ensure that you enclose them within double quotes.
- To display a digital asset from SharePoint, ensure that you include the original path of the asset. When you open an asset in SharePoint, you can copy its original path by viewing file details.
- Ensure that the URLs for preview images link directly to binary image files rather than to HTML pages. URLs pointing to HTML pages don't render the images correctly and display a placeholder.

Managing drafts

When you create or edit records, Customer 360 SaaS saves your changes as drafts before you submit the record or send it for approval. You can view and manage all your drafts on the My Drafts page.

You can search for specific drafts, edit drafts, or discard drafts. Customer 360 SaaS discards drafts after 15 days if you don't submit them.

Note: Effective in the July 2026 release, the ability to edit records in a table, save changes as drafts, and manage those drafts on the My Drafts page is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

The following image shows a sample My Drafts page:

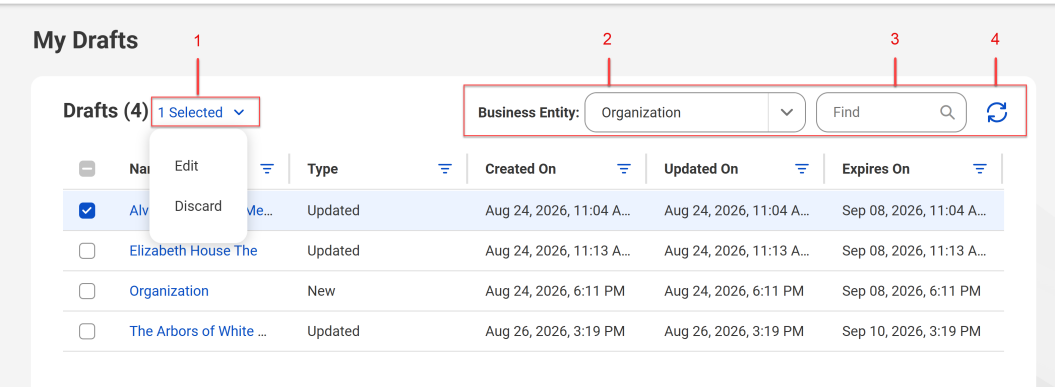

1. Menu

2. Business Entity
3. Find
4. Refresh

The following table describes the user interface elements that you can use:

User Interface Element	Description
Menu	Lists the actions that you can perform on the selected drafts. You can perform the following actions: - Edit. Opens a dialog box where you can select whether to edit the draft records in a table or individually. - Discard. Deletes the selected drafts.
Business Entity	Lists the business entities on which you can filter the drafts.
Find	Filters drafts based on a record name.
Refresh	Refreshes the page and clears all applied filters.

The following table describes the fields that appear on the My Drafts page:

Draft Detail	Description
Name	Name of the record. Click the record name to navigate to the Record Details page.
Type	Type of the record. One of the following types appears for each record: - New. Indicates a record that you created but didn't submit. - Updated. Indicates an existing record that you changed but didn't submit. - Submission Failed. Indicates a draft that failed submission due to an internal error.
Created On	Date when the record was created.
Updated On	Date when the record was last updated.
Expires On	Date when the draft expires. If you don't submit or send a draft for approval, it expires 15 days after the last update. **Note:** Drafts that failed submission have no expiry date. You can either submit or discard these drafts.

Creating records

You can create and save business entity records. Based on your user role, you might need to send the records for approval. Supplier 360 SaaS validates the fields before saving a record.

For example, you can use the Contact business entity to add contact information for suppliers, such as name and address of contacts, and the Supplier business entity to add supplier data, such as supplier name, its contact details, and its financial details. You can also add related records and dynamic field definitions to a business entity record.

When you create a record, Customer 360 SaaS saves the record as a draft before you submit the record or send it for approval. Use the draft to work on the record over time and submit all changes at once. A Draft label appears next to the record name. The label persists until you submit the changes.

Only you can see the drafts that you create, and you can access them from the My Drafts page.

Preview Notice: Effective in the October 2026 release, the ability to save changes as drafts is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

If your record contains a multilingual picklist field, the field values appear in your browser's locale. If the picklist isn't localized for your browser's locale, the picklist values appear in the configured default language.

Creating a contact record

Use the Contact business entity to create a contact record.

1. Click **New** > **Contact** > **Create**.

   A form appears.
   Supplier 360 SaaS populates default values in the fields that have default values configured. You can override the default values.

   Effective in the October 2026 release, the option to populate default values is available for preview.

   Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

2. In the **General Information** section, enter the basic details.

   Note: To add an image, type a URL in the Image field.

   When you enter the details, Supplier 360 SaaS searches for similar records based on the exact text that you enter. You can view the similar records. If you find any record matching the record that you are creating, you can select the matching record and discard your changes.

   If validation errors appear, fix the errors.

   Supplier 360 SaaS saves the record as a draft and displays a Draft label next to the record name.

3. To use text values in the rich text format, use the rich text editor or manually add the HTML tags and attributes.

   For more information about using the rich text format for text values, see “Applying rich text formatting to text values” on page 49.

4. To add digital assets, enter URLs of digital assets in the URL fields.

5. To view similar records, perform the following tasks:

   a. Click **Similar Records**.

   b. To view the details of the record, click the title of the record.

   c. If the opened record is the same as the one you plan to create, click **Accept** in the **Similar Records** panel.

   d. Click **OK**.

   The selected record opens, and your changes are discarded.

6. To add an entry to a section, perform the following steps:
   a. To add an entry to a section, click **Add**.
   b. Enter values in the fields that appear.

      If a field group has fields with default values, Supplier 360 SaaS populates the default values for such fields. You can override the default values.

      When you add values, Supplier 360 SaaS assigns a field group ID to the entry.

      Note: When you add multiple entries to field groups and nested field groups, you can sort and filter the entries based on the fields within the field groups.
   c. If validation errors appear, fix the errors.

      For nested field groups, Supplier 360 SaaS displays the validation errors in the following ways:

      - When you expand each level in nested field groups that have errors, the total count of validation errors and warnings increases.
      - If a nested field group with errors is part of multiple tabs, the total error count includes the errors from all those tabs.
      - If a nested field group with errors is part of multiple tabs and you remove it from one tab, the nested field group continues to exist in other tabs. The total error count includes the errors from all those tabs where it continues to appear until you submit a record.
   d. Apply the changes.

      If the section has data quality issues, you can view the number of information, warnings, errors, and other issues in the entry. You can view the data quality issues or continue adding data to the record.
7. To add a value to a picklist field, select a value from the list.

   Effective in the April 2025 release, the option to sort, search, and find picklist values is now available for preview when the picklist field contains more than 200 values.

   The following image shows the dialog box that appears when you click a picklist that contains more than 200 values:

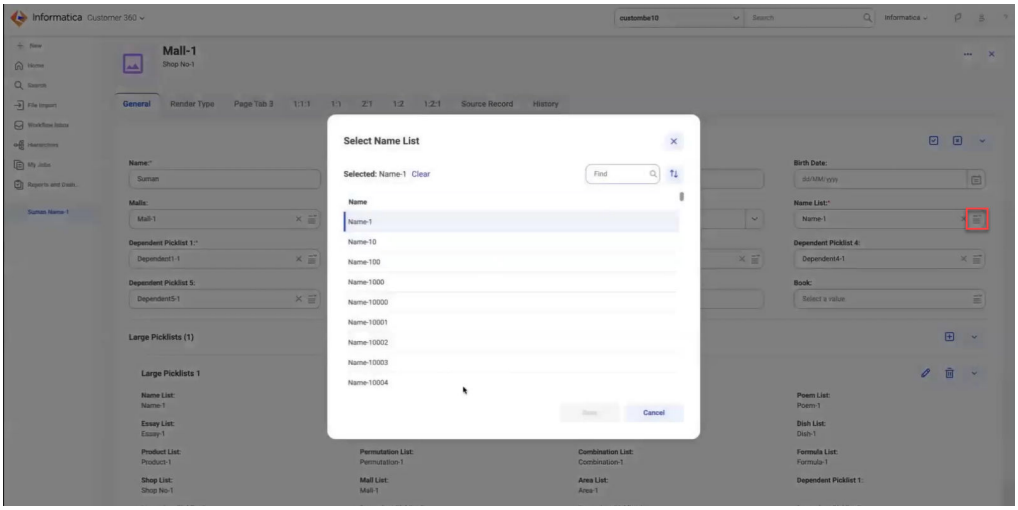

   Note: If you use an asterisk (*) character or a string containing an asterisk (*) character to find values, Supplier 360 SaaS doesn't return any results.

   Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in

accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

8. To add a related record, expand the **Related Records** section, and click **Add**.
9. To add dynamic field definitions, perform the following steps:
   a. In a dynamic field definition section, click **Add Dynamic Field Definitions**.
   b. Select the dynamic field definitions that you want to add to the record.

      You can select fields, field groups, or folders, and use the search box to find the required dynamic field definitions. When you select a folder, all the fields, field groups, and subfolders that it contains are added.
   c. Click **Apply**.

      The selected dynamic field definitions appear in a tree table format.
   d. To configure the properties of a dynamic field definition, hover over a row, and click **Edit**.

      The **Properties** dialog box appears.
   e. Configure the following properties:
      - **Required**. Indicates whether the dynamic field definition is a required field for the related records.
      - **Inherit to Child**. Indicates whether you want to allow inheritance of the dynamic field definitions to the child records.
        The child records inherit the updates to the dynamic field definition properties.
      - **Inherits from**. Displays the parent record from which the dynamic field definition is inherited. To stop inheriting the dynamic field definitions from the parent record, select **None**. If you update the dynamic field definition properties of a child record, the child record no longer receives the updates to the dynamic field definitions from the parent record, and the **Inherits from** option is cleared.
   f. Click **Apply**.
10. Save your changes.

Action	Description
Submit	If no approval is required, you can directly submit your changes, and the record is saved.
Send for Approval	If approval is required or is optional, you can send your changes for approval. When you send for approval, a review task is created and available for approvers to review. An icon appears after a few seconds to indicate that the record has pending changes.

If the record has data quality issues, a confirmation message appears. You can view the data quality issues or continue to save your changes.

Note: If multiple sections of a record are available in the edit mode, save or cancel the changes in each section before you submit the record or send it for approval.

If you don't submit the record or send it for approval, Supplier 360 SaaS saves the record as a draft.

Creating a supplier record

Use the Supplier business entity to create a supplier record.

1. Click **New** > **Supplier** > **Create**.

   A form appears.
   Supplier 360 SaaS populates default values in the fields that have default values configured. You can override the default values.

   Effective in the October 2026 release, the option to populate default values is available for preview.

   Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

2. In the **General Information** section, enter the basic details of the organization.

   Note: To add an image in the text field, type a URL. You can add images in JPEG, JPG, PNG, TIFF, SVG, and GIF formats.

   When you enter the details, Supplier 360 SaaS searches for similar records based on the exact text that you enter. You can view similar records. If any record matches with the record that you create, you can select the matching record and discard your changes.

   If validation errors appear, fix the errors.

   Supplier 360 SaaS saves the record as a draft and displays a Draft label next to the record name.

3. To use text values in the rich text format, use the rich text editor or manually add the HTML tags and attributes.

   For more information about using the rich text format for text values, see "Applying rich text formatting to text values" on page 49.

4. To add digital assets, enter URLs of digital assets in the URL fields.

5. To view similar records, perform the following tasks:

   a. Click **Similar Records**.

   b. To view the details of the record, click the title of the record.

   c. If you find the opened record is same as the one that you plan to create, click **Accept** in the **Similar Records** panel.

   d. Click **OK**.

   The selected record opens, and your changes are discarded.

6. To add an entry to a section, perform the following steps:

   a. To add an entry to a section, click **Add**.

   b. Enter values in the fields that appear.

      If a field group has fields with default values, Supplier 360 SaaS populates the default values for such fields. You can override the default values.

      When you add values, the system assigns a field group ID to the entry.

      Note: When you add multiple entries to field groups and nested field groups, you can sort and filter the entries based on the fields within the field groups.

   c. If validation errors appear, fix the errors.

For nested field groups, Supplier 360 SaaS displays the validation errors in the following ways:

- When you expand each level in nested field groups that have errors, the total count of validation errors and warnings increases.
- If a nested field group with errors is part of multiple tabs, the total error count includes the errors from all those tabs.
- If a nested field group with errors is part of multiple tabs and you remove it from one tab, the nested field group continues to exist in other tabs. The total error count includes the errors from all those tabs where it continues to appear until you submit a record.

d. Apply the changes.

If the section has data quality issues, you can view the number of information and warning issues in the entry. You can view the data quality issues or continue adding data to the record.

7. To add a value to a picklist field, select a value from the list.

Effective in the April 2025 release, the option to sort, search, and find picklist values is now available for preview when the picklist field contains more than 200 values.

The following image shows the dialog box that appears when you click a picklist that contains more than 200 values:

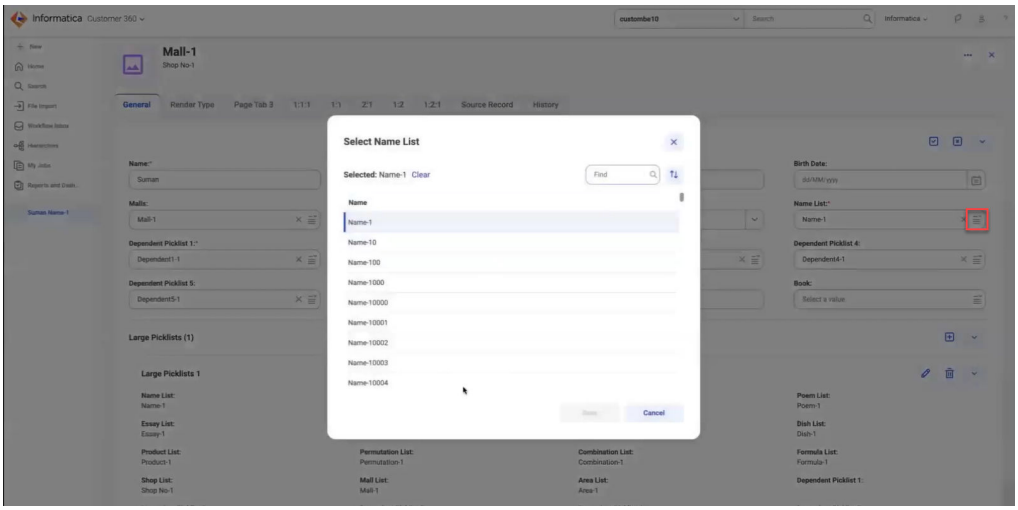

Note: If you use an asterisk (*) character or a string containing an asterisk (*) character to find values, Supplier 360 SaaS doesn't return any results.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

8. To add a related record, expand the **Related Records** section, and click **Add**.
9. To add dynamic field definitions, perform the following steps:

a. In a dynamic field definition section, click **Add Dynamic Field Definitions**.

b. Select the dynamic field definitions that you want to add to the record.

You can select fields, field groups, or folders, and use the search box to find the required dynamic field definitions. When you select a folder, all the fields, field groups, and subfolders that it contains are added.

c. Click **Apply**.

The selected dynamic field definitions appear in a tree table format.

d. To configure the properties of a dynamic field definition, hover over a row, and click **Edit**.

The **Properties** dialog box appears.

e. Configure the following properties:

- **Required**. Indicates whether the dynamic field definition is a required field for the related records.
- **Inherit to Child**. Indicates whether you want to allow inheritance of the dynamic field definitions to the child records.
  The child records inherit the updates to the dynamic field definition properties.
- **Inherits from**. Displays the parent record from which the dynamic field definition is inherited. To stop inheriting the dynamic field definitions from the parent record, select **None**. If you update the dynamic field definition properties of a child record, the child record no longer receives the updates to the dynamic field definitions from the parent record, and the **Inherits from** option is cleared.

f. Click **Apply**.

10. Save your changes.

Action	Description
Submit	If no approval is required, you can directly submit your changes, and the record is saved.
Send for Approval	If approval is required or is optional, you can send your changes for approval. When you send for approval, a review task is created and available for approvers to review. An icon appears after a few seconds to indicate that the record has pending changes.

If the record has data quality issues, a confirmation message appears. You can view the data quality issues or continue to save your changes.

Note: If multiple sections of a record are available in the edit mode, save or cancel the changes in each section before you submit the record or send it for approval.

If you don't submit the record or send it for approval, Supplier 360 SaaS saves the record as a draft.

Applying rich text formatting to text values

You can use text values in rich text format to style and enhance text with options, such as bold, italics, underline, fonts, colors, bullet points, and hyperlinks. This formatting helps you style and enhance important details in your data.

For example, you can highlight key specifications, such as display resolution, processing capabilities, storage capacity, and camera quality for a phone.

You can add HTML tags and attributes directly to text values or use the rich text editor to format text values.

The following text in the source code viewer generates formatted text in the editor:

```
<p>You can apply rich text formatting to text values to format and highlight
important details of your data. </p>
<p>The following are examples of the formatting options in the editor: </p>
<ul>
<li><strong>Bold</strong></li>
<li><em>Italic</em></li>
<li><span style="text-decoration: underline;">Underline</span></li>
<li><span style="color: #e03e2d;">Colors</span> </li>
```

```
<li><sub>Subscript</sub></li>
<li><sup>superscript</sup></li>
<li><s>Strikethrough</s></li>
<li><a href="https://docs.informatica.com/" target="_blank" rel="noopener
noreferrer">Hyperlink</a></li>
</ul>
```

The following image shows the rich text editor with the formatted text:

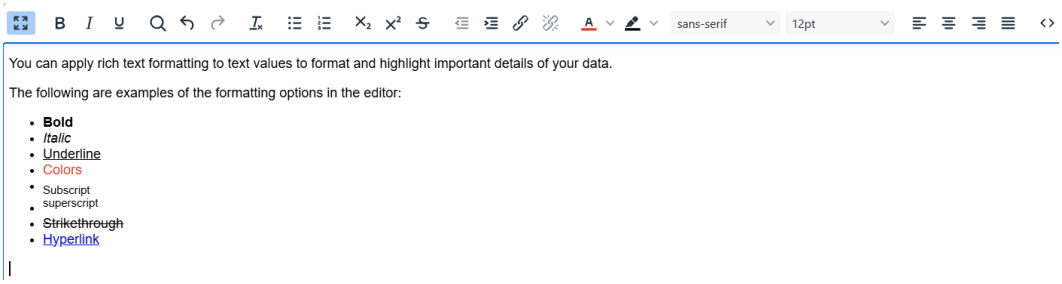

You can copy content from standard content editors, such as Microsoft Word, and paste it in the rich text editor. The text retains the rich text format. In the source code viewer, you can view the HTML tags and attributes that are applied to the text. However, if the content exceeds 4,000 characters, you might have to remove the additional characters from the source code viewer.

Note: When you save a record, unsupported tags and attributes are removed for security reasons.

You can view text values in rich text format or as plain text based on the page type.

Text values can appear in the following formats:

- Rich text format. Appears on pages where you create, view, or edit records.
- Plain text without HTML tags and attributes. Appears on pages where you view the record details, such as history, source records, workflows, and relationships. Hover over the text values to view them in rich text format.
- Plain text with HTML tags and attributes. Appears on pages where you edit data in bulk. When you use the Equals condition in find and replace operations, include the tags and attributes in the text.

If you add plain text and rich text to a column header, the plain text value appears as unformatted text and the rich text value appears as formatted text.

Using the rich text editor

You can use the rich text editor to enter and format text values. The toolbar contains formatting options and a source code viewer. Use the source code viewer to add or view the HTML tags and attributes that are applied to the text.

The following image shows the rich text editor with sample formatted text:

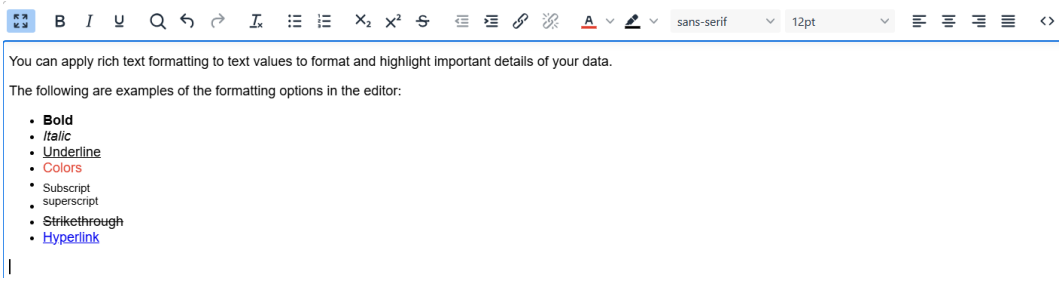

To view the editor in full screen, click the Fullscreen option from the toolbar.

The following table lists the categories and options in the rich text editor:

Category	Options
Font	You can apply the following font formatting options: - Bold - Italic - Underline - Subscript - Superscript - Strikethrough - Text color - Background color - Font - Font size
Paragraph	You can apply the following paragraph formatting options: - Bullet list - Numbered list - Increase or decrease indent - Left, center, right, or justified alignment
Text editor operations	You can perform the following operations in the text editor: - Find and replace - Redo - Undo - Clear formatting
Linking	You can apply the following linking options: - Insert/edit link - Remove link

Tags and attributes for rich text values

The following table lists the HTML tags and attributes that you can use to style and enhance text values:

Category	Tags	Attributes
Font	`<b>`, `<strong>`, `<i>`, `<u>`, `<em>`, `<s>`, `<del>`, `<strike>`, `<sub>`, `<sup>`, `<small>`, `<big>`	Not applicable
Paragraph	`<p>`, `<div>`, `<center>`, ` `, `<h1>`, `<h2>`, `<h3>`, `<h4>`, `<h5>`, `<h6>`, `<ul>`, `<ol>`, `<li>`	For `<p>` and `<div>`, you can use `align="left|center|right|justify"`.
Link	`<a>`	For `<a>`, you can use `href` and `target`.
Code	`<code>`, `<pre>`	Not applicable
Style	`<font>`, `<span>`	For `<font>`, you can use `color`, `face`, and `size`. For `<span>` for colors, you can use `style`.

Note: When you save a record, unsupported tags and attributes are removed for security reasons.

Enriching records

When you create or update a record, you can search the repository of external data providers for matching records and get them as CLAIRE recommendations. You can then import a recommendation to enrich the record. For example, you can use D-U-N-S® Numbers to search for organizations and enrich Organization records with the data that Dun & Bradstreet returns.

Also, after you submit a new record or submit changes to an existing record, you can view CLAIRE recommendations with data from external data providers. You can then accept a recommendation and enrich the record. These recommendations can include data to enrich field values of the record, to classify the record within a hierarchy, or both. For example, after you update a Product record with a product description, CLAIRE might recommend brand names based on the description. When you accept a recommendation, the Brand field is updated with the brand name.
Note: If rule associations for data enrichment fail because of errors, such as connection timeouts or lack of response from the data provider, the records from which the data enrichment is triggered are marked with the Exception validation status. You can search for and filter the records in search results by the Exception status. For more information about filtering search results, see *Filtering search results*.

If an approval is required for the changes, you can view the CLAIRE Copilot panel after the changes are approved. In some cases, records might be automatically enriched. As an approver, you can view the data that's automatically enriched in the workflow inbox when you review records.

Enriching a new record

You can use CLAIRE recommendations to enrich records with data from external data providers.

1. Click **New** > **Record**.
2. Select a business entity.

   If your organization is configured with external data providers, the **CLAIRE** icon is highlighted.
3. If you see an enrichment card on the **Insights** tab of the CLAIRE Copilot panel, perform the following tasks to enrich records:
   a. Enter information in the required fields.

      On the **Insights** tab, the **Search** button appears.
      The following image shows the option to search for matching records in the GLEIF database for a sample record:

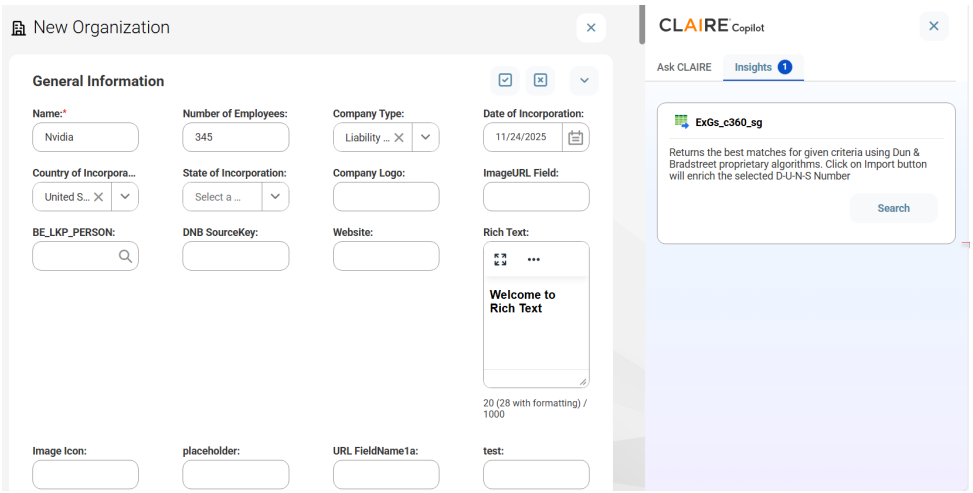

   b. To find records from a data provider, click **Search** corresponding to the data provider.

The details that you entered in the form are sent to the data provider to find matching records. If matching records are found, they appear as recommendations.
The following image shows sample recommendations from the GLEIF database for the sample record:

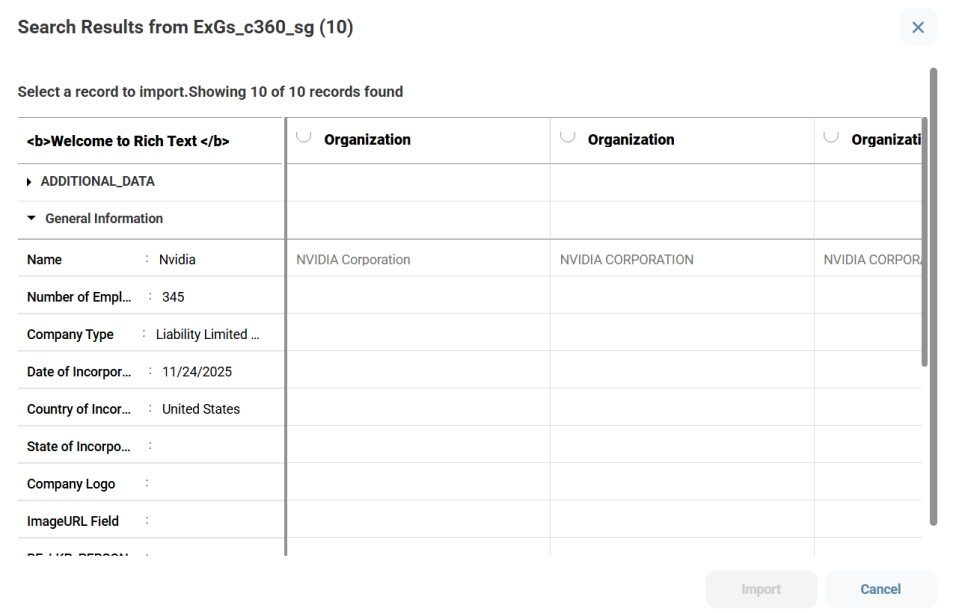

c. Select a recommendation, and click **Import**.

d. In the **Confirm Import** dialog box, click **Import**.

After you import a recommendation, the record is enriched and submitted or sent for approval.

4. After you submit a record, if you see the CLAIRE icon highlighted, click the CLAIRE icon and perform the following steps to enrich records:

a. Click the **Insights** tab.

The **CLAIRE Copilot** panel displays recommendations in cards.
The following image shows a record with sample recommendations for middle name in the **CLAIRE Copilot** panel:

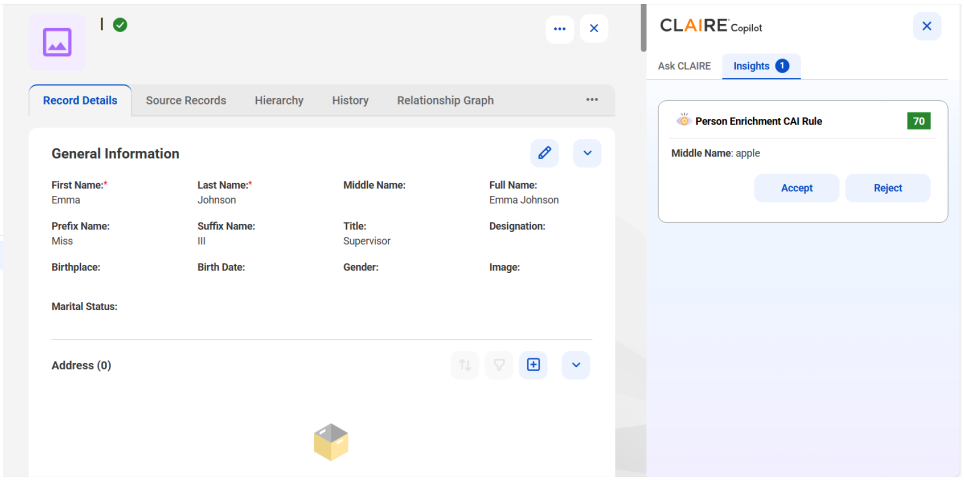

b. Review the recommendations, and accept a recommendation.

The **CLAIRE Copilot** panel continues to display the remaining recommendations.

Note: When you accept recommendations, you might update data that you already enriched. To avoid overriding data that's already enriched, review each recommendation and accept the recommendation that best fits your needs. Contact your administrator to learn more about the type of enrichment that's enabled for your organization.

Enriching and validating drafts

MDM SaaS enriches and validates drafts when you save them. The same behavior applies to drafts that are created or updated through REST APIs.

On record creation and updates

When you create new records, MDM SaaS saves the records as drafts, so you can make changes and correct mistakes and validation errors before you submit the records. When you submit drafts, MDM SaaS creates master records. If rule associations are configured to enrich or validate records during record creation, they run on drafts that are created during the record creation phase.

Similarly, when you edit existing records, the changes are saved as drafts until you submit the drafts. If rule associations are configured to enrich or validate records during record updates, they run on the drafts that are in the update phase.

On field focus change

Your administrator might configure rule associations to run when field focus changes. These rule associations run immediately when you select another field in drafts. The results of these rule associations aren't saved to the draft.

On section save and record submission

Your administrator might configure rule associations to run when you apply changes to sections and also submit records. These rule associations run when you save the changes in drafts. These rule associations don't run again when you submit drafts.

Rule associations configured to run after record submission also run when you save sections with input fields for the rule associations. Similarly, rule associations configured to run both on section save and record submission run when you apply changes to each section that includes input fields for the rule associations. If rule associations include input fields from multiple sections of a record, the rule associations run when you apply changes to each section. For example, if rule associations have input fields from root fields, the Address field group, and the Email field group, they run three times as you apply changes to each of these sections.

Preview Notice: Effective in the October 2026 release, the ability to save changes as drafts is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Adding a related record scenario

Related records are the records that contain data associated with a record. You can establish relationship between two records within a business entity or across business entities.

You have a supplier, PQR Internationals, to which you want to add John Smith as a contact. You search for the record of PQR Internationals and open it. You search for the record of John Smith and add John Smith as a related record to PQR Internationals. You can also add a related record while you are creating a record using the **Quick Create** button in the **Related Records** section.

For example, while you are creating a Suppler record, you can create a Contact record and establish a relationship between the two records and save them.

Related records receive the dynamic fields based on the relationship that you use to relate the records

The following predefined relationships are available for Supplier 360 SaaS:

- Sub-Supplier
- Supplier to Contact
- Contact
- Subsidiary

Adding a related record to an existing record

To establish relationships between business entities, your user role must have the edit permission for these business entities.

1. To add a related record to an existing record, search and open the record. Expand the **Related Records** section, and click **Add Related Records**.

   The **Add Related Record** dialog box appears.
2. Select a relationship type that you want to establish between the records, and click **Next**.
3. In the **Search** box, type the complete search string or the search string with the asterisk (*) or question mark (?) wildcard characters for the record that you want to find, and press the **Enter** key.
4. In the **Filters** panel, select the values for the filter criteria that you require.

   Supplier 360 SaaS lists the first 25 facetable dynamic fields based on relevancy, such as frequently used fields, or based on field rankings. You can't add or remove filters to view all dynamic fields that you have enabled as facetable.

   The revised search results appear in the **Search Results** panel based on the filters you set.
5. Select the record that you want to add as related record, and click **Add**.

   The record is added and appears in the **Related Records** section. Based on the relationship selected, attributes might appear.
6. To add a new record as a related record, perform step 1.
7. Enter values or update the default values if the related record includes attributes.

   Note: If you edit another attribute after you clear default values from relationship attributes, the default values appear after you submit the record.
8. Click **Submit**.

   Based on the user privileges, the record is either submitted for approval or updated successfully.

If the record receives dynamic fields from a related record, edit the record to enter values in the dynamic fields.

Finding records

To find a record, you can either enter a search text in a search box or perform a filtered search. A search can return multiple matching records. You can sort and filter the search results to refine the search results.

Use the search box to perform a full-text search. When you use the search box, you can search within a specific business entity or across multiple business entities. You can search for records in English and Japanese.

Use filtered search to specify a criteria for your search. To repeatedly perform the same search with the configured filter values, you can save a search and run it at any time. To repeatedly perform a search with the predefined fields, you can save a filtered search as a template. You can use different values in the search template and perform the search multiple times. You can open any record and view the complete details of it.

You can search for records with fields that contain values, don't contain any values, or contain values that exactly or approximately match the specified value. You can search for dynamic field values and filter search results based on dynamic fields. You can't search and replace dynamic field values.

If you use a source business ID to search for a record, the search returns the master record to which the source record contributes.

If you use a master business ID to search for a record, the search returns all the records that contain the searched record as related record.

For example, you can use the business ID of an organization record to search for all the employee records that contain the organization record as a related record.

When you edit records in bulk or view saved searches and apply search filters, the first letter of picklist values that are lowercase appears as uppercase.

You can view the fields based on which the search results match the search term.

Note: After you add or update records, it might take about a second for the records to become searchable.

Using the search box to find records

Select one or more business entities and use the search box to search for records. The search results show the most important details of the records. You can see the complete details by opening the records.

Note: If the name of a business entity exceeds 22 characters, you can view the complete name in the tooltip when you hover over the name.

You can use a complete or partial text as a search string. When you start typing a search string, you can select any matching string that appears as a suggestion. You can also select a recently used search string.

Note: When you type a string to search for records across multiple business entities, Supplier 360 SaaS lists the strings based on the previous search suggestion. Supplier 360 SaaS doesn't include business entity names along with the suggested strings.

The following table lists few example search strings and explains how they function:

Example Search String	Search Behavior
John Smith	Searches for records that contain `John`, `Smith`, or any variations of `John` or `Smith` as a field value.
"John Smith"	Searches for records that contain `John Smith` as a field value. When you use this search string format, avoid combining it with other formats. The search results might not be the same when you use them separately. For example, "Janet" || John* might return different results when you search for "Janet" and John* separately. You can use this format to perform exact searches for field types, such as string, date, and date and time. If you want to perform an exact search on records based on other field types, ensure that you don't enclose the value within double quotes.
John*	Searches for records that contain a value that starts with `John`, such as `Johnson` or `Johnny`.
Jo*n	Searches for records that start with `Jo` and end with `n`, such as `Johansson` or `Jordan`.
MDM0000000000F	Searches for a record with a field value that matches the business ID `MDM0000000000F`. The search also returns records that approximately match this value. If you use a source business ID to search for a record, the search returns the master record to which the source contributes values. If you use a master business ID to search for a record, the search returns all the records that contain the searched record as related record. For example, you can use the business ID of an organization record to search for all the person records related to the organization record.
*	Returns all records. When you use only spaces as a search string, the search doesn't return any results. When you run a search on a business entity that contains dynamic fields, the order of the results might change each time you run the search.
Jo?n	Searches for records with a single character between `Jo` and `n`, such as `John` and `Joan`. You can use question mark as a wildcard multiple times in a word.
The Washington Post	Ignores the stopword `The` and searches for the records that contain `Washington`, `Post`, or any variations of `Washington` or `Post`. The example stopwords are `a`, `an`, `of`, and `with`. For a complete list of stopwords, contact Informatica Global Customer Support.
-John*	Searches for records that don't start with `John` or any variations of `John`, such as `Johnson` or `Johnny`.
+Manager +Janet*	Searches for records that contain `Manager` and a field value that starts with `Janet`. For example, a record with the name `Janet Williams` and designation `Manager` matches the search string.

Example Search String	Search Behavior
Joan~	Searches for records with similar values where up to two characters in the search string can be replaced. For example, `John` or `Donn` can match the search string.
Hans && Williams	Searches for records that contain `Hans` and `Williams` in the same record. For example, first name is `Hans` and last name is `Williams`.
(Janet* || John*) && Manager	Searches for records that contain `Manager` and any variations of `Janet` or `John` as a field value. For example, a record with first name `Johnny` and designation `Manager`.
/Joan_([0-9]+)/	Searches for records that contain `Joan_` followed by a numeral, such as `Joan_123` or `Joan_1`. **Note:** The forward slashes act as escape characters so that the wildcard characters are not considered as search string.
/John[*]/	Searches for records that contain `John` followed by the asterisk (*) character. **Note:** To use wildcard characters as part of the search string, escape wildcard characters with square brackets (`[]`). Also, ensure that the search string starts and ends with forward slashes.

Note: Search strings can include only the following wildcard characters: `+ - = && || > < ! ( ) { } [ ] ^ " ~ * ? : \ /`

You can't search for records with similar values in system fields. However, you can search for records that exactly match the specified values in system fields and continue to use the supported wildcards in search strings for system fields.

When you search for records with keywords, such as `AND`, `OR`, and `NOT`, as field values, ensure that you specify the values in the following format:

- `"\"OR\""`
- `"\"AND\""`
- `"\"NOT\""`

If you don't enter the values in the specified format, MDM SaaS doesn't return any results. However, if these keywords are part of a field value, such as `SAND AND MARVEL`, you don't have to enclose the keyword part of the value in the specified format.

You can save the searches that you perform frequently and run them any time from the **Search** page. The saved searches contain the search term and the filter attributes that help you initialize the searches.

When you search for records that contain URLs with digital assets, use only the file names of digital assets that are in English, excluding their URLs. If the file names contain spaces, ensure that you enclose them within double quotes.

Using filtered search to find records

Use filtered search to search for records based on one or more field values. You can also use business IDs to search for records.

To repeatedly search for records with the configured filter values, you can save the search and run it at any time. You can save a search as a template, and enter different field values to perform a search. You can't use search terms that contain special characters for filtered search.

You can export a maximum of 10,000 records that the Search Results page can display.

Note: If you include a hierarchy in a saved search, the saved search doesn't display the hierarchy filter.

To filter records that contain wildcard characters, such as `+ - = && || > < ! ( ) { } [ ] ^ " ~ * ? : \ /` in field values, ensure that you include a backslash (\) followed by wildcard characters in the search string. The backslash (\) acts as an escape character and considers the wildcard character in the search string.

For example, you specify product codes in the following format:

```
<company_ name>-<product_code>
```

If you want to search for all the product codes in your company, enter the search string for the Product Code field in the following format:

```
ABCCorp\-*
```

If you don't use backslash (\) before the wildcard character hyphen `(-)`, Supplier 360 SaaS doesn't return the search results.

Filter records using filtered search

You can use the filtered search to filter records.

1. Click **Search** > **New Filtered Search**.

   The **New Filtered Search** panel appears.
2. Select a business entity.

   The fields related to the business entity appears.
3. Enter search terms for the fields that you want to include in the search.
4. To add fields, perform the following tasks:
   a. Click **Add Field**.

      The **Add Field** dialog box appears.
   b. Select the fields, and click **OK**.
5. To filter records based on field values, select one of the following filter values:
   - (Blank). Filters records where the field is blank or contains only whitespace.
   - (Not Blank). Filters records that contain any value in the field.
   - Is. Filters records with field values that match the search string.
     When you use the `Is` filter value, you can use a search string to search for records with specific field values.

     For more information about sample search strings, see Using the search box to find records.
   - Equals. Filters records that match the specified date and time.
     Use the Equals filter value for the date and date and time field types.

When you use the Equals filter value, ensure that you select the date and time from the calendar and time picker. If you enter the date and time, the search doesn't filter records.

Note: The filter values don't appear for system fields.

6. Click **Search**.

   The search results appear.

7. To save a search, perform the following tasks:

   a. Click **Actions** > **Save As**.

   b. In the **Save As** dialog box, enter a unique name for the search.

   c. To save the search as a template, select **Save search as a template**.

   d. Click **Save**.

      The saved search or template appears on the **Search** page.

Search Results page

After you perform a search, the **Search Results** page lists the matching records for each selected business entity. You can choose to view the search results for a specific business entity. You can filter and sort the records to refine the search results.

The Search Results page lists a maximum of 10,000 matching records. You can filter or sort the records to refine the search results. You can also view additional details of the records.

The following image shows a sample Search Results page:

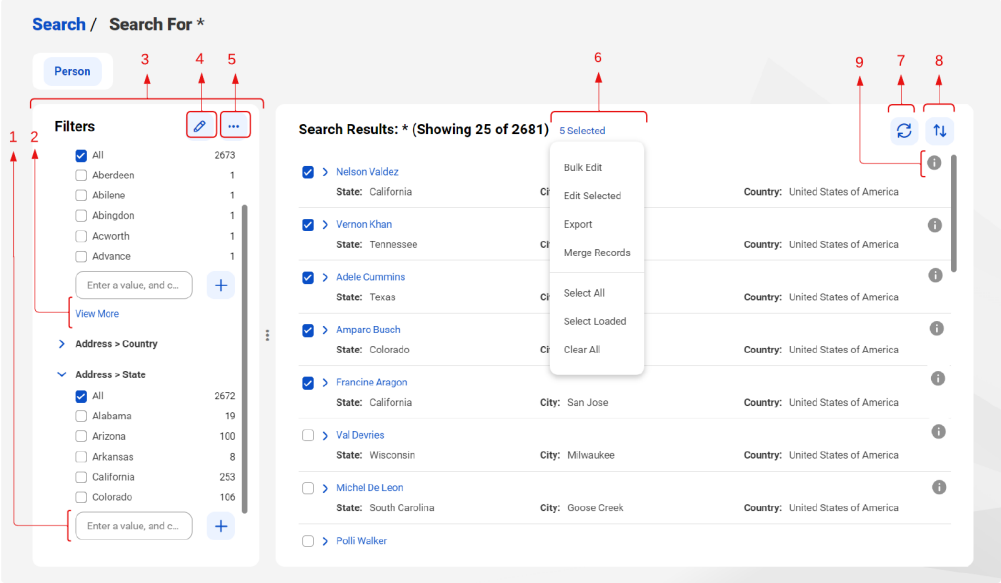

1. View More
2. Customize
3. Filters Panel
4. Edit
5. Actions
6. Menu
7. Refresh
8. Sort
9. Matched On

Note: The filter and sort fields vary for each business entity.

The following table describes the different user interface elements that you can find on the Search Results page:

User Interface Element	Description
View More	Displays additional filter values for a field based on which you can filter the search results. Appears only if the number of filter values for a field exceeds five.
Customize	Filters the search results based on a date range or numeric range that you specify.
Filters panel	Lists the predefined filters. For more information about filtering search results, see "Filtering search results" on page 62.
Edit	Lists all the available fields. You can select the fields that you want to display as filters in the Filters panel.
Actions	Saves the search results.

User Interface Element	Description
Menu	Lists the following actions that you can perform on the search results: - `Bulk Edit`. Opens the **Edit in Bulk** page with the records that you select from the search results. You can then specify the attributes that you want to edit and the values that you want to replace. - `Edit Selected`. Opens the selected records so that you can edit them sequentially. - `Export`. Exports the selected records to a CSV file. - `Merge Records`. Opens the **Merge Records** page with the records that you select from the search results. You can then review and merge these records. - `Select All`. Selects all the search results. - `Select Loaded`. Selects all the loaded search results. - `Clear All`. Clears all the selected search results.
Refresh	Refreshes the **Search Results** page and clears all the selected records and applied filters.
Sort	Displays the following values based on which you can sort the search results: - `Field name`. Sorts the search results based on the selected field in ascending order. - `Relevance`. Sorts the search results based on how closely the search results match the search criteria. The relevant search results appear in descending order. By default, the search results are sorted by relevance. An upward arrow beside a field name indicates that the results are sorted in ascending order, and a downward arrow indicates descending order. You can't sort the search results based on relevance in ascending order. **Note:** If you want to sort the results in reverse order after you sort the results based on a field, click **Sort** and select the field again.
Matched On	Lists the fields based on which the records in search results are matched. If records included in search results don't appear to match the search term, you can view the fields that they were matched on. If you don't have access to the field based on which a search result was matched, the field name doesn't appear. If you search using dynamic field values, you can also view the dynamic fields. **Note:** The **Matched On** element displays fields of string data type.

Filtering search results

To narrow down search results, you can filter the results.

You can select filter values based on which you want to filter the search results. The Filters panel displays the filter values in the title case irrespective of the case in which the field values are available in the records.

When you filter records, system fields that are text fields aren't case-sensitive.

For example, if the `LastUpdatedBy` field has values in different cases across records, such as `Andrea`, `andrea`, and `AndRea`, MDM SaaS treats them as a single value. When you filter records, the value appears as `andrea` in the `LastUpdatedBy` field.

You can also filter records based on fields that don't contain any value.

1. In the Filters panel of the search results page, select a field value based on which you want to filter records.

   The field values displayed in the filter panel depend on the current search results. When you select a field value, all related filter options update dynamically to show only relevant values. For example, when you select `USA` as the filter value for the Country field, the State field automatically displays only relevant filter values, such as California and Alabama.

2. To filter records with fields that are blank or contain only whitespace, select **(Blank)**.

   Note: When you select the **(Blank)** filter value for a field, ensure that you don't select other values for the field. If you select other values, MDM SaaS clears the selected **(Blank)** filter value.

3. To filter records with specific field values, enter a search string.

   When you search for records with multiple filters on fields in the same field group or nested field group, the search evaluates the conditions within each record. The search returns a record only if a single entry matches all the conditions.

   For example, a record contains home and office address entries in the Address field group. The home address has the city New York and the street Main Street. The office address has the city Chicago and the street Oak Avenue. If you search for the records with the city Chicago and the street Main Street, the search doesn't return the record because no single address entry matches both conditions.

   Note: Effective in the October 2026 release, the ability to search for records with multiple conditions within a single field group entry is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

   For more information about search strings, see Using the search box to find records.

4. To filter search results based on a hierarchy, perform the following steps:

   a. Select a hierarchy as a filter.

      You can view up to 1000 hierarchies as filters in the Filters panel. If the search results aren't up to date, contact your administrator to process the hierarchies for search.

   b. To filter records that belong to a node in the hierarchy, select a node.

   c. To exclude the child records of the selected node from the results, clear **Include records from child nodes**.

   Note: By default, the child records of a selected node are included in the search results.

   The following image shows sample search results that are filtered based on Product Hierarchy:

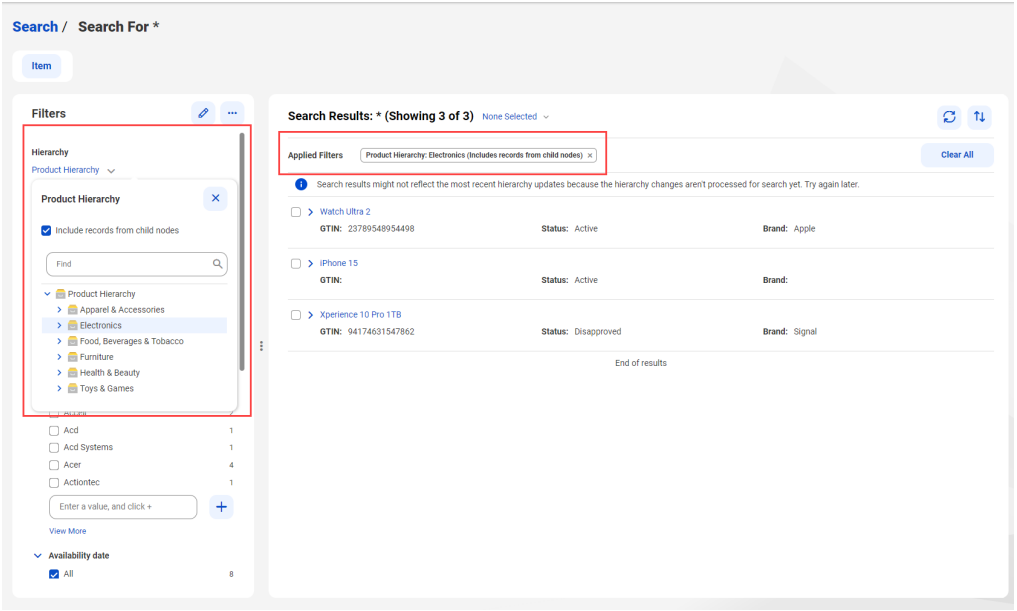

5. To manage the filters in the Filters panel, edit the Filters panel and customize filters.

- Include fields to filter the search results based on a date range or any numeric range that you specify.
- Remove or add fields to the Filters panel.

When the search results exceed 1,000 records, dynamic field nodes in the filter panel are collapsed and don't display all dynamic fields. You can manually expand the dynamic field nodes to review the fields to include or edit the filters panel to customize and add the dynamic fields you want to include.

6. To filter active records, deleted records, or both, select **Active**, **Deleted**, or both options from the Record State Indicator filter.

   By default, the Active option is selected, and the search results page displays active records.

   Note: If you select **Deleted**, ensure that you select **All** or **Skipped** from the Validation Status filter.

   The following image shows sample search results that are filtered based on deleted master records:

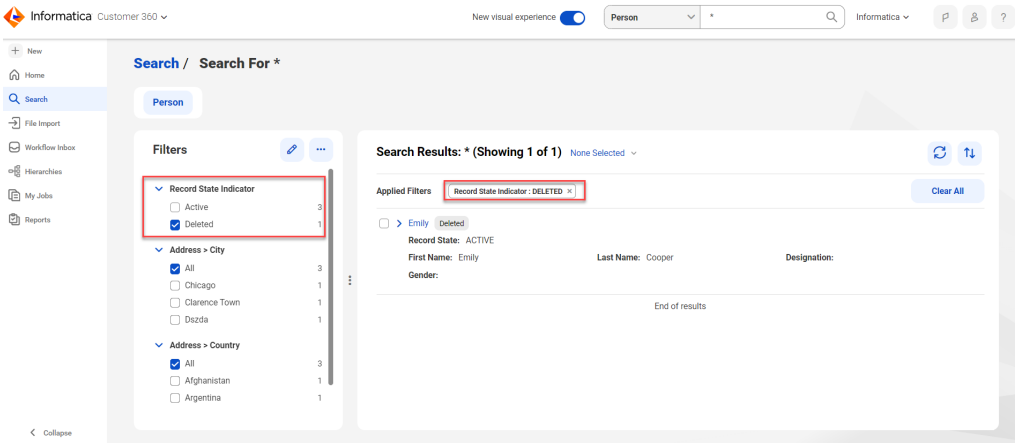

   Note: The Record State system field and the Record State Indicator filter aren't the same. The Record State system field indicates the state of a record, such as active, pending, or inactive. The Record State Indicator filter indicates whether to filter active records, deleted records, or both.

7. To filter records based on their validation status, perform the following tasks:

   a. In the Validation Status filter, select the following filter values:

      - Validation Errors. Filters records that have validation errors.
      - Valid. Filters records that don't have any validation errors.
      - Pending Validation. Filters records that are yet to be validated.
      - Skipped. Filters records for which the validation status is set to skipped.
        All deleted records have the validation status set to skipped.

        Note: If you select **Skipped**, ensure that you select **Deleted** from the Record State Indicator filter.
      - Exception: Filters records for which data enrichment rule associations failed due to errors, such as connection timeouts or lack of response from the data provider.

        Note: After you update and submit the records with the Exception status, MDM SaaS tries to enrich the records again. If the data enrichment is successful, the records are saved with the Valid status. If the Exception status persists, contact your administrator.

   b. To further filter records with validation errors, select filter values in the Error Type and Errors filters.

The following image shows sample search results that are filtered based on validation errors:

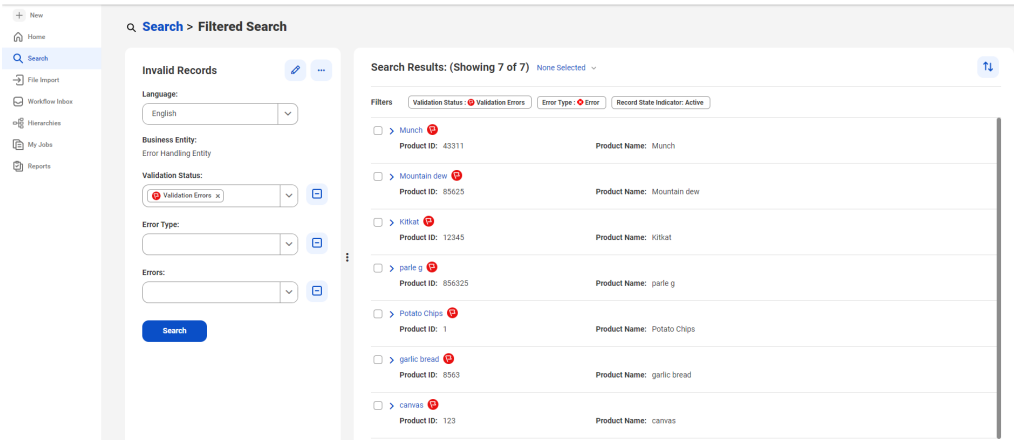

Managing saved searches and templates

To frequently perform the same search with configured filter values, you can filter records and save your search. You can run the saved search any time. If you want to frequently perform a search with predefined fields, you can save a filtered search as a template.

After you create a saved search or template, you can edit or delete it. Additionally, you can also add your saved searches and templates to favorites.

You can also share a saved search or template with other users in your organization, or keep it private.

For example, consider a sales team where all members frequently search for customer records based on a filter criteria, such as customers who purchased over $10,000 in the last month and are located in New York city. To track the customer records, each team member creates a saved search.

To reduce time and effort, the sales team lead can create a saved search with these criteria and share it with everyone. When the sales lead shares the saved search, all other members in the team can quickly access matching records without creating their saved searches. If they want to reuse the shared search with some additional filter values, they can save it as a new search and configure the additional filter values.

Additionally, if other team members have the appropriate privilege, they can also rename or delete the shared search, or change its sharing settings to private.

You can view all the saved searches and templates that you create on the **Created By Me** tab and those that are shared with you on the **Shared With Me** tab on the Search page.

Sharing saved searches and templates

After you create a saved search or template, it remains private. You can choose to share it with other users in your organization.

1. On the **Search** page, click the **Created By Me** tab and select a saved search or template that you want to share.
2. Click **Actions** > **Share**.
3. In the **Share Saved Search** or **Share Search Template** dialog box, select one of the following sharing options:
    - No. The saved search or template remains private and isn't shared with other users.

- Yes, share with everyone. All users can access and then run the shared search or template. Only users with the appropriate privilege can rename, delete, or change the sharing option to private. For more information about the privilege to rename, delete, or change the sharing option of a shared search or template, contact your administrator.

4. Click **Save**.

Editing and deleting saved searches and templates

You can edit or delete the saved searches and templates that you created.

Note: If you include a hierarchy in a saved search, the saved search doesn't display the hierarchy filter.

1. On the **Search** page, click the **Created By Me** tab and select a saved search or template that you want to edit.

   The search details appear.
2. Edit the search by adding or removing fields and field values.
3. Click **Actions** > **Save**.
4. To save the search as a new search, click **Actions** > **Save As**.
5. In the **Save As** dialog box, enter a unique name for the search.
6. To save the search as a template, select **Save search as a template**.

   Note: You can save only the filtered searches as a template.
7. Click **Save**.

   The saved search and template appears on the **Search** page.

   Note: The **Search** page lists the saved searches and templates, and the filtered searches use a suffix `Filtered` added to the search names.
8. To delete a search, on the **Search** page, hover over a search, and click **Delete**.

   When you delete a saved search or template, MDM SaaS permanently deletes the saved search or template for you and anyone you've shared it with.

Adding saved searches and templates to favorites

To quickly access your saved searches and templates, add them to your favorites. Additionally, you can also sort saved searches and templates by favorites.

You can't add shared saved searches and templates to favorites.

1. On the **Search** page, click the **Created By Me** tab.
2. Select a saved search or template, and click **Actions** > **Add to Favorites**.

   After you add a saved search or template to your favorites, MDM SaaS moves the saved search or template that you mark as favorite to the top of the list.
3. To remove a saved search or template from favorites, select the saved search or template, and click **Actions** > **Remove from Favorites**.

Exporting search results

You can export the search results to a CSV file. The exported file contains the values of fields that are set to be searchable and the values of fields that appear as filters. The exported search results don't contain dynamic fields.

1. From the **Search Results** page, select the records that you want to export.
2. Click **Selected** > **Export**.

   The **Export Records** page appears.
3. In the **Summary** section, you can review the details of your search results.

   The following table describes the details of search results that you want to export:

Parameter to Export Records	Description
Business Entity	Business entity records that you want to export.
Search Term	String used to search for business entity records.
Include Validation Error Details	Includes validation error details for records with validation errors in the exported file. To exclude the validation error details, such as validation error type, severity, and the error message, for records that contain validation errors from the exported file, clear **Include Validation Error Details**. **Note:** By default, the files for export includes the validation error details of the selected records.
Number of Records	Number of records selected on the Search Results page.
Filters	The selected filter values used to narrow the search results.
Picklist	Picklist details that you select, such as codes, values, or both, and include in the exported file. Select the picklist details you want to include in the exported file. You can export picklist codes, values, or both. **Note:** To use the exported file to ingress data into your business application, ensure that you select picklist codes or picklist codes and values.

4. In the **Attributes to Export** section, you can view the complete list of attributes. Select the attributes that you want to include in the exported file, or apply a saved template to export the records.

   Note: When you select attributes such that the exported file size exceeds 100MB, the export search results job fails. Refine your search to reduce the number of records or attributes to export and try again.

   When you choose **Select All** fields, facetable dynamic fields aren't selected. Ensure that you manually select the dyanmic fields that you want to include in the exported file.

   After you select the attributes, you can save your selection as a template to repeatedly include a set of attributes or proceed to step 7 to export the records.
5. To save a set of selected attributes as a template, perform the following tasks:
   1. Click **Save as Template**.
   2. In the **Save as Template** dialog box, enter a template name.
   3. Click **Save**.

6. To include a set of attributes and apply a saved template to the list of attributes, perform the following tasks:
    1. Click **Apply Saved Template**.
    2. In the **Select Template** dialog box, select the template that you want to apply to the list of attributes.
    3. Click **Apply**.
7. Click **Export Records**.

    The export process doesn't consider space as a value. When you export records that contain blank data for a particular field, the export process excludes the blank data for that particular field in the exported file.
    If the field has a value along with spaces in between, the export process considers the space. For example, ABC corporation is exported as ABC corporation.

    Supplier 360 SaaS retains the exported data for 15 days.

Sample exported search results file

The exported search results file includes the field details in the following format:

- The first row includes all the root field values. The root field values appear in all the rows.
- A separate row includes all the source record details.
- Additional rows are included for field group and nested field group entry. All the field values in a field group or nested field group entry appear in a single row.
  Also, you can view additional columns that contain the IDs of field groups and nested field groups.

  Note: If your organization has nested field groups visibility enabled, nested field groups appear in the exported file.
- First column displays metadata ID of a record.
- If records contain validation errors and if validation errors are included in the exported file, the file contains a row for each validation error type. For example, if a field in a field group contains three validation error types, such as warning, information, and error, the exported file contains three separate rows for the field.
  Additional columns display details such as severity and error message.
- Additional columns display picklist details that you want to export, such as codes, values, or both.
- The date and dateTime values appear in epoch time format.

The following table lists a sample exported search results file that includes separate rows for records with nested field groups that contain validation errors:

meta_id	Created By	Brand Name	Category_id	Category_Sector	Category_Cam_Camera_idBrand_id	Category_Cam_Camera	Category_Brand_Price_id	Category_Brand_Price_Price	Severity	Error Message
655f51a	Tom	Focus Studio	7ff4b5						INFO	Brandname: This is a mandatory field.
655f51a	Tom	Focus Studio	7ff4b5	Photography	87gh6				ERROR	Camera: You can't proceed to the next step without entering a value for this field.
655f51a	Tom	Focus Studio	7ff4b5	Photography	87gh65r	Sony	ldw829	Sony ZV	ERROR	Price: Invalid data. Enter an integer.
655f51a	Tom	Focus Studio	7ff4b5	Photography	87gh65r	Sony	ldw829	INR 1,92,990	WARNING	Price: Calculate festive discounts and enter the price.

The following table lists a sample of the exported search results file that contains deleted master records:

States_Record State Indicator	meta_id	First Name	Last Name	Designation	Gender	Address_City	Address_Country	Phone_Phone Number
DELETED	66825a26ecb65861df6912bb	Laura	Grey	Manager	Female	New York	United States	44108907
DELETED	99830a26abb88761df6902xe	Rachel	Smith	Sr. Manager	Female	Florida	United States	44456123
DELETED	20825f26ecb43861df8712fw	Mary	Jenkins	Team Lead	Female	California	United States	44832168

Searching for records with localized picklist values

You can search for records with localized, multilingual picklist field values. The language in which picklist values appear depends on the action that you perform.

Note: Effective in the October 2026 release, the ability to search for records with picklist values in localized languages is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

You can enter the search string in any enabled language, regardless of your browser locale. For example, if Country is localized for French and German, you can search for records with English, French, or German values.

When you filter search results, the Filters panel displays values in your browser locale, or in the default language of the picklist if not localized for your browser locale. For example, if a field is localized into German with English as the default language, a French-locale browser displays the English values.

When you sort records, use auto-suggest, or view the search results, picklist values appear in the default language configured for the field, regardless of browser locale.

When you export records that have localized picklist fields, the exported data contains only the codes for those fields, not their values.

Editing records

If your user role permits, you can add or edit information in records, delete records, and add or delete related records. You can edit a single record or edit multiple records individually, in a table, or in bulk. You can also enrich the records that you edit. You can't edit records that have pending changes.

When you edit records, Customer 360 SaaS automatically saves the changes as drafts before you submit the record or send it for approval. If you don't submit them, Customer 360 SaaS discards the drafts after 15 days.

If another user updates different fields of the same record, you can synchronize your draft from the Record Details page to see their updates without losing your changes.

For example, you have a draft for the John record in which you set Country to USA and Middle Name to Smith. Another user updates the Title field to Mr for the same record. When you open the record on the Record Details page, you can synchronize your draft to see the updates of the other user. After you synchronize, you can see the value in the Title field, and your draft values in the Country and Middle Name fields remain intact.

If another user updates the same fields in a record for which you have a draft, conflicts occur. Resolve the conflicts before you submit the record or send it for approval. You can either choose to retain your updates or updates of other users.

After you select a strategy, you can override it for individual fields. For example, you have a draft for the John record in which you set the Country field to USA and the Middle Name field to Smith. Another user sets the Country field to India and the Middle Name field to Sam. To resolve the conflict, you select a strategy that keeps either your values or the values of the other user. You can also keep your value for the Country field and the value of the other user for the Middle Name field.

Note: Effective in the October 2026 release, the ability to save changes as drafts, resolve conflicts, and synchronize your draft with updates made by other users is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

When you edit a master record, MDM SaaS creates a patch record. A patch record is similar to a source record, but it only contains the master record fields that are edited.

Patch records are created for each source system. For example, when you edit a master record from the user interface, a patch record is created for the default source system. However, when you edit a master record value that originated from the Salesforce source system, another patch record is created for the Salesforce source system.

When you delete field group entries or field values from a master record, the deletions apply only to the master record and not the source records. In a deduplicated field group, MDM SaaS doesn't recalculate trust scores to replace the deleted entry with another entry.

For more information about source records, see *Establish the best version of the truth*.

If a record is in the pending state, you can view the task summary. The task summary includes information such as the current status, assignee, and due date. To view the task summary, click the task ID.

For example, if a record is in the pending state and you want to edit the record, you can view the task summary to determine who the approver is. You can then request the approver to approve the record. After the record is approved, you can edit it.

If you're an approver, you can also view details about data changes.

Note: If you use Supplier 360 SaaS to edit a master record, the availability of the changes in the master record depends on the source ranking of the Default source system. The changes are available in the master record if the Default source system has the highest source ranking among all contributing source systems. Otherwise, the changes don't appear.

Editing a record scenario

A contact named John Doe finds out that a supplier named PQR Internationals could not deliver a consignment to a distributor. You want to check the distributor's address, correct errors, and redirect the consignment to the correct address.

Editing a single record

To edit one record at a time and update its field values, select a business entity and search for the record that you want to edit.

1. From the search results, open the record that you want to edit.
2. Update the information in the required sections.
3. If the record contains inapplicable dynamic fields that you want to remove, click **Remove Inapplicable Fields** from the **Actions** menu.
4. Apply the changes.

   The changes are saved as a draft.
5. Optionally, click **Synchronize** if another user updates different fields of the same record while you are editing it.

   You can see their updates without losing your changes.

6. Optionally, you can discard your changes instead of submitting them.
    1. From the Actions menu, select **Discard Draft**.
       A confirmation dialog appears.
    2. Click **Discard**.
       The draft is discarded, and your changes are removed from the record.
7. To submit your changes, click **Submit** or **Send for Approval**.

   When you send for approval, a review task is created and available for approvers to review. An icon appears after a few seconds to indicate that the record has pending changes.
8. If another user updated the same fields of the record, resolve the conflicts.
    1. In the information message, click **Resolve Conflicts**.
    2. In the **Resolve Conflicts** dialog box, select one of the following strategies in the Conflict Resolution Strategy list:
        - **Retain the existing values**. The fields with conflicts keep the updates of the other user.
        - **Retain my conflicting changes**. The fields with conflicts keep the values from your draft.
    3. Optionally, to override the selected strategy, select the resolution for individual fields.
    4. Click **Resolve**.
       The conflicts on your draft are resolved.
    5. Click **Submit** or **Send for Approval**.

Inapplicable dynamic fields

The dynamic fields in a record become inapplicable when you change or remove the parent record or the related record, or when you update the dynamic field definition of the parent record.

For example, consider a record named Borges Penne related to another record named Grocery. The Grocery record contains Allergens and Ingredients as the dynamic field definitions. In the Borges Penne record, you can enter values for Allergens and Ingredients. If you remove the relationship between the Grocery and Borges Penne records, the Allergens and Ingredients fields in the Borges Penne record become inapplicable fields if they have values. You can remove inapplicable fields, from the **Actions** menu.

Enriching an existing record

To edit one record at a time, select a business entity and search for the record that you want to edit. You can enrich a record while editing it or after you submit changes to it.

1. From the search results, open the record that you want to edit.

   If a record is already enriched, you can view the date and time when the record was last enriched.

2. To enrich the record again, click the **CLAIRE** icon and if you see the **Enrich** button in the **Insights** tab, perform the following steps:

   a. Click **Enrich**.

      If matching records are found in the repository of the data provider, they appear as recommendations.
      The following image shows recommendations from the GLEIF database for the sample record:

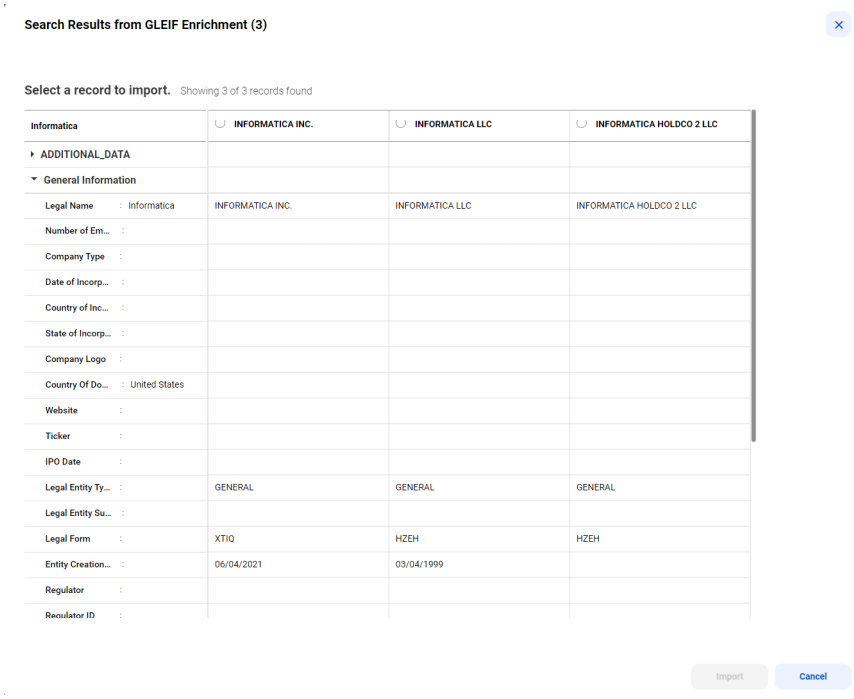

   b. Select a recommendation, and click **Import**.

   c. In the **Confirm Import** dialog box, click **Import**.

      After you import a recommendation, the record is enriched and submitted or sent for approval.

3. To update the record, click **Edit**.

4. Update the information in the required sections.

   Note: When a field group or a nested field group contains multiple entries, you can sort and filter those entries based on the fields within the field group.

5. Apply the changes, and click **Submit** or **Send for Approval**.

   When you send for approval, a review task is created and available for approvers to review. An icon appears after a few seconds to indicate that the record has pending changes.

6. After you submit a record, if you see the CLAIRE icon highlighted, click the CLAIRE icon and perform the following steps to enrich records:

   a. Click the **Insights** tab.

      The **CLAIRE Copilot** panel displays recommendations in cards.
      The following image shows a record with sample recommendations for middle name in the **CLAIRE Copilot** panel:

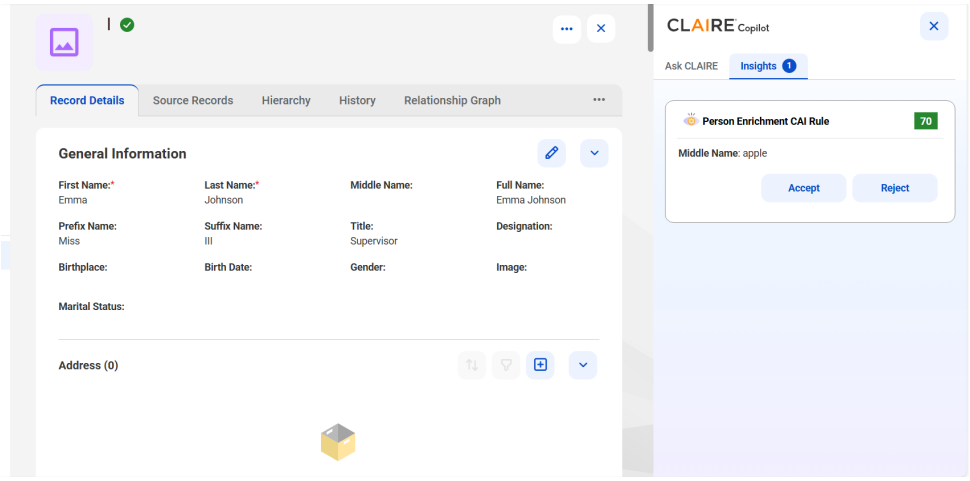

   b. Review the recommendations, and accept a recommendation.

      The **CLAIRE Copilot** panel continues to display the remaining recommendations.

      Note: When you accept recommendations, you might update data that you already enriched. To avoid overriding data that's already enriched, review each recommendation and accept the recommendation that best fits your needs. Contact your administrator to learn more about the type of enrichment that's enabled for your organization.

Edit multiple records in a table

You can select and edit up to 10,000 records in a table. Customer 360 SaaS saves the records as drafts.

After you edit records, you can submit all drafts or discard them to revert to the original values. You can't edit the records in the pending or deleted state.

If other users update the same fields of a record for which you have a draft, conflicts occur. Resolve conflicts on your draft before you submit the record or send it for approval.

You can copy and paste values into a maximum of 50 cells at a time, including values from an Excel or CSV file. You can't copy and paste values into dynamic fields.

Note: You can't copy clickable values, such as **Add** and **n entries**, in the field groups column.

If your user role has read access, you can view the fields in the table. To create, update, or delete fields, your user role requires the corresponding permissions. If you don't have the required permissions, the restricted fields retain their current values when you edit the records. You can review the records that contain restricted fields and request access from your administrator.

Note: You can't view dynamic fields definitions on the Edit in Table page.

Note: Effective in the July 2026 release, the ability to edit a record in a table is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in

accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

You can clone records to create identical draft copies instead of entering the data again. You can clone up to 10 records at a time. Cloned drafts contain the values of root fields and field groups, except dynamic fields.

Note: Effective in the October 2026 release, cloning a record in a table is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

The following image shows the records selected for editing in a table:

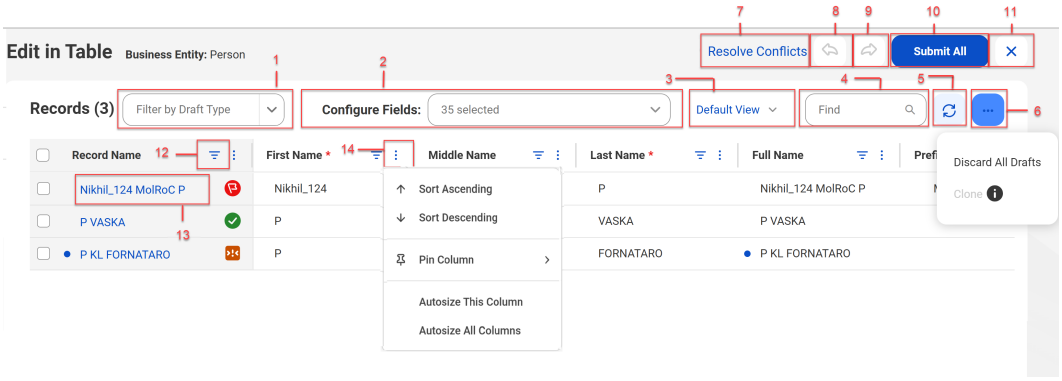

1. Filter by Draft Type
2. Configure Fields
3. Default View
4. Find
5. Refresh
6. Menu
7. Resolve Conflicts
8. Undo
9. Redo
10Submit All
11Close
12Filter
13Record Name Link
14Menu

The following table describes the user interface elements:

User Interface Element	Description
Filter by Draft Type	Filters records by draft type. Select any of the following options: - **New**. Filters new records that you created but did not submit. - **Updated**. Filters existing records that you changed but did not submit. - **Submission Failed**. Filters drafts that failed to submit because of an internal error. - **Processing Submission**. Filters drafts that Customer 360 SaaS is submitting. - **Discarding**. Filters drafts that Customer 360 SaaS is discarding.
Configure Fields	Displays the fields that you select. By default, all root fields are selected. The fields that you configure are available for that session.
Default View	Shows all root fields. To create a view, select the fields that you want to display, and then save the view. You can create up to five views.
Find	Searches records based on field values.
Refresh	Refreshes the table to display the updated values after you submit changes.
Menu	Lists the actions that you can perform on the records: - **Discard All Drafts**. Discards all the drafts to revert to the original values. - **Discard Selected Drafts**. Discards only the selected drafts to revert to the original values. This option appears when you select records with drafts. - **Clone**. Creates identical draft copies of the selected records. This option is enabled when you select a record.
Resolve Conflicts	Opens a dialog box where you can resolve conflicts on records before you submit or send the record for approval. To resolve conflicts, you can select a resolution strategy for all conflicting fields. Alternatively, for individual fields, select whether to keep your value or the other user's value. This option appears only when there are conflicts for records in the table.
Undo	Reverses your most recent 10 actions on the fields.
Redo	Restores your most recent 10 undo actions on the fields.
Submit All	Submits all the drafts in the table. You can also select specific drafts and submit them.
Close	Closes the Edit in Table page.
Filter	Filters records based on the field values. You can choose an operator, enter values, and apply the filter. The operator changes based on the data type of the column.

User Interface Element	Description
Record Name Link	Displays the name of a record as a clickable link. You can click the record name to navigate to the Record Details page.
Menu	Lists the following actions that you can perform in each column: - **Sort Ascending**. Sorts records in ascending order based on the selected column. - **Sort Descending**. Sorts records in descending order based on the selected column. - **Pin Column**. Fixes the column to the left side of the Record Name column, or to the right side of the table. You can also unpin the column. - **Autosize This Column**. Automatically resizes the selected column. You can also drag the column to resize. - **Autosize All Columns**. Automatically resizes all the columns in the table.

Note: Effective in the October 2026 release, the ability to clone a record in a table is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Editing records in a table

You can select multiple records and edit them in a table. Each record appears as a row, and each cell in a row displays a field value.

1. Select a business entity and use the search box to search for the records.

   The **Search Results** page appears.

2. Select the records that you want to edit.

3. Click **Selected** > **Edit**.

   The **Edit Records** dialog box appears.

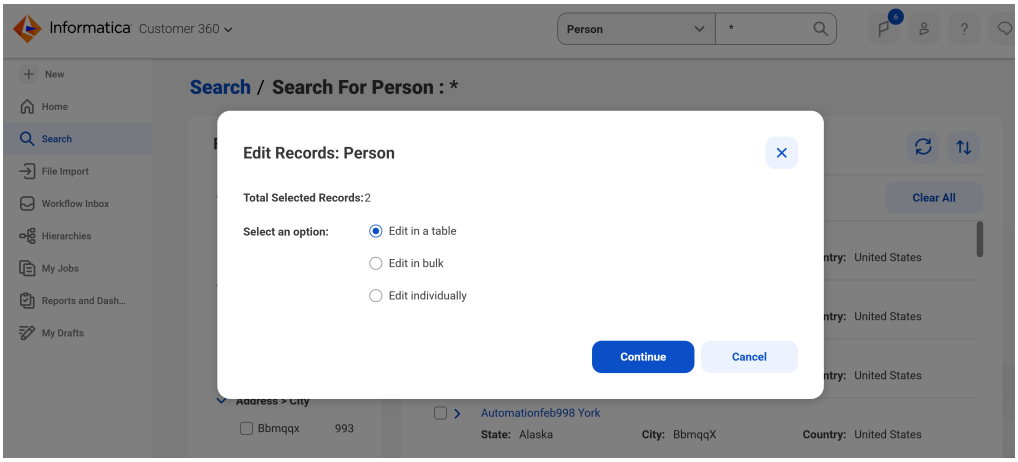

4. Select **Edit in a table**, and click **Continue**.

   The selected records appear as separate rows in a table. You can drag and drop the columns to reorder them, except for the Record Name column.

Note: When you navigate from the **Search Results** page to the **Edit in Table** page for a different set of records, the **Edit in Table** page is refreshed to overwrite the existing table with those records.

5. To update field values for a selected record, enter values, and then move to the next row.

   The record moves to the draft state. A blue icon appears in the edited cell and the corresponding row to indicate the draft state.

6. To edit multiple records at a time, you can copy a value from a cell to multiple cells. Drag the lower right corner of the cell downward or copy the cell and paste it into multiple cells.

   Note: When you edit multiple records at a time, you can update only the root fields of those records.

7. To add values to field groups, perform the following steps:

   1. In a field group cell, click **Add**.
      The fields in the field group appear as columns in a separate table.

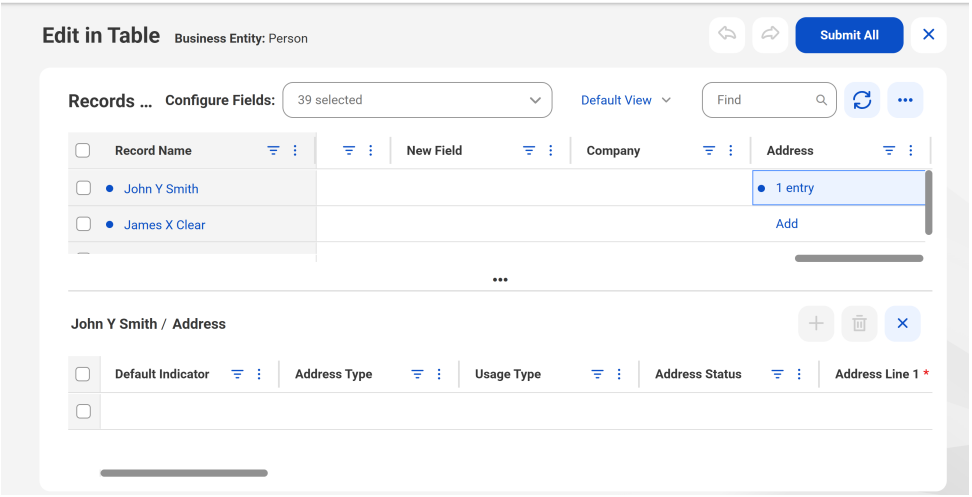

   2. Enter values.
   3. To add more rows, click the **Add** icon and enter values.
   4. To add an entry to a nested field group, click **Add** in the field group cell.
      The fields in the field group appear as columns.
   5. Enter values.
   6. Click the breadcrumb above the table to navigate between field groups.

      Note: You can navigate up to six levels of nested field groups.
   7. To reorder the columns, you can drag and drop them.
   8. To add more rows, click the **Add** icon and enter values.
   9. Click the **Close** icon.

8. To delete values in a field group, click **n entries** in the field group cell, where **n** is the number of entries that the field group contains. Select the rows that display the values you want to delete, and click the **Delete** icon.
9. To edit values in a field group, click **n entries** in the field group cell, where **n** is the number of entries that the field group contains. Modify the values in the table and click the **Close** icon.
10. Fix any validation errors.

    If error remediation is enabled and a record contains any validation error, a validation error icon appears for that record.

If error remediation is disabled, records display the following icons based on the severity of the issues they contain:

- If the records contain errors, warnings, and information, the error icon appears.
- If the records contain warnings and information, the warning icon appears.
- If the records contain one category of issues, such as errors, warnings, or information, the icon for that category appears.

11. To submit all the drafts, click **Submit**. To submit specific drafts, click the drafts, and click **Submit Selected**.

    A confirmation message appears to indicate that you are about to save valid records.
    Record submission depends on the following error remediation property setting:

    - If enabled, records are submitted even if they contain errors.
    - If disabled, records with errors aren't submitted.

12. In the **Confirm Submission** dialog box, click **Submit**.

    The records are updated successfully.

    Note: While submission is in progress, the records that are selected for submission are disabled and can't be edited.

Editing multiple records individually

You can select multiple records and edit them individually. The records of each business entity appear on separate tabs. You can select up to 20 records on the Search Results page for each business entity.

1. From the search results, select the records that you want to edit.
2. Click **Selected** > **Edit**

   The **Edit Records** dialog box appears.
3. Select **Edit individually** and click **Continue**.

   The selected records appear in a new tab.
4. Edit and apply the changes.

   The changes are saved as a draft.
5. Optionally, click **Synchronize** if another user updates different fields of the same record while you are editing it.

   You can see their updates without losing your changes.
6. Click **Submit**.

   Based on the user privileges, the record is either submitted for approval or updated successfully.
7. If another user updated the same fields of the record, resolve the conflicts.
   1. In the information message, click **Resolve Conflicts**.
   2. In the **Resolve Conflicts** dialog box, select one of the following strategies in the Conflict Resolution Strategy list:
      - **Retain the existing values**. The fields with conflicts keep the updates of the other user.
      - **Retain my conflicting changes**. The fields with conflicts keep the values from your draft.
   3. Optionally, to override the selected strategy, select the resolution for individual fields.
   4. Click **Resolve**.

The conflicts on your draft are resolved.

5. Click **Submit** or **Send for Approval**.

8. To edit the next record in the sequence, click **Next**, and then repeat steps 4 through 6.

Editing multiple records in bulk

You can edit or delete field values of multiple records in bulk. You can specify conditions to identify the records to edit and specify the values for the attributes that you want to edit.

If you delete values of required fields, the record is saved without a validation error.

Note: The Search Results page displays up to 10,000 records. If the edit criteria matches more than 10,000 records, all the records that match, including the ones that don't appear on the page, are updated in bulk.

1. Select a business entity and use the search box to search for the records.

   The Search Results page appears.

2. Optionally, select filters to narrow down your search results.
3. Select the records that you want to edit.
4. Click **Selected** > **Bulk Edit**.

   The selected records appear on a new tab. If your search criteria includes more than 10,000 records, only the first 10,000 are visible on the tab, but all the records are available for bulk editing.

5. To specify the attributes that you want to edit and their values, perform the following tasks:
   a. From the **Find Records Based on** list, select one of the following values:
      - An attribute. Identifies the records to edit based on the attribute value.
      - None. Includes all the selected search results to edit.

   b. Select an operator from the list.
   c. Enter the value based on which you want to identify records.

      Note: To identify values that contain wildcard characters, such as `+ - = && || > < ! ( ) { } [ ] ^ " ~ * ? : \ /`, ensure that you include a backslash (\) followed by wildcard characters. The backslash acts as an escape character and considers the wildcard character in the field value.

   d. To add another attribute, click **Add Condition**, and repeat steps 1 through 3.

      You can add multiple attributes.

   e. From the **Replace** list, select an attribute whose value you want to edit.
   f. Enter the value for the selected attribute.

      Note: To delete an attribute value, delete the current value and keep the value empty.

   g. To add another attribute, click **Add Condition**, and repeat steps 5 through 6.

      You can add multiple attributes.

6. Click **Apply**.

   If the records match the specified attributes and don't require approval to save the changes, these records are updated and highlighted in yellow. If the records match the specified attributes but require approval to save the changes, these records are highlighted in grey and are not updated. These records display the changes after they are approved.

7. Click **Submit**.

   A warning dialog box appears, indicating that you are about to save multiple records.

8. Click **Submit**.

A job is created to edit the records in bulk. You can monitor the status of the job on the **My Jobs** page.

Delete records

You can delete master and source records that you don't need. However, the records aren't permanently deleted from the data store. When you delete master and source records, the state of these records changes from active to deleted. You can't update deleted records.

After you delete a master record, its source records remain active. After you delete a source record, the master record remains active if at least one of the contributing source records is active. The trust scores of the master record field values are recalculated based on the survivorship configuration of the active source records.

When you delete a master record and it's contributing source records, the master record field values are recalculated based on the survivorship configuration of the deleted source records.

If you delete all contributing source records, Supplier 360 SaaS automatically deletes the master record.

When you delete a master record that's related to another record through relationships, Supplier 360 SaaS deletes the relationship between them. The relationship graph and the related records section don't display the relationship.

When you delete a master record that's related to another record through a business entity record field, the deleted record continues to appear as the field value of the business entity record field. When you open the record, the record appears as deleted.

When you delete a record that's part of a hierarchy, Supplier 360 SaaS deletes the record and its relationship with the child records from the hierarchy. However, all the relationships aren't permanently deleted from the data store.

You can delete records through file import or record details page. When you search for records, the search results include active records. You can filter and view the deleted records.

Deleting a master record

You can delete a master record that you no longer need. However, the records aren't permanently deleted from the data store. After you delete a master record, the associated source records remain active.

1. From the search results, open the record that you want to delete.
2. Click **Actions** > **Delete**.
3. Confirm the action.

   The record is either submitted for approval or deleted.

For more information about deleted records, see *Delete records*.

Deleting source records

You can delete source records that you no longer need. However, these records aren't permanently deleted from the data store. After you delete a source record, the associated master record remains active if at least one of the source record is active. The trust scores of the field values are recalculated for the master record based on the survivorship configuration of the active source records.

1. From the search results, open the master record for which you want to delete source records.
2. Navigate to the **Source Records** page.
3. Go to the source record that you want to delete, and then click **Actions** > **Delete**.

The source record is selected for deletion.

4. Select any additional source records that you want to delete.
5. Optionally, to view active source records that you can delete, use the **Record State Indicator** filter.
6. Click **Delete**.

   A confirmation dialog box appears.
7. Confirm deletion or send for approval.

   The record is either submitted for approval or deleted.

For more information about deleted records, see *Deleted records*.

Deleting a record scenario

You can delete master and source records. If you use Supplier 360 SaaS to delete a master record, the deletion depends on the rank of the Default source system.

If the rank of the Default source system is higher than the ranks of other source systems that contribute active records to the master record, you can delete the master record. Otherwise, you can't delete the master record.

Consider a master record in Supplier 360 SaaS with two contributing source records, Record 1 and Record 2. The Default source system is ranked 3.

The following table lists the contributing source records of the master record, their source systems, and source rankings:

Source Record	Source System	Source Rank
Record 1	HR	1
Record 2	Finance	2

In Supplier 360 SaaS, try to delete the master record. The deletion fails because the Default source system is ranked lower than the HR and Finance source systems.

Viewing data quality status of a record

To assess the quality of a record and monitor the rule associations linked to it, you can view the data quality status of the record.

For example, you can check the data quality status to identify rule associations that didn't run on a record or that failed with the Exception status. You can also check the data quality status to view rule associations that ran successfully but need your action to accept or reject the recommendations from CLAIRE.

Note: You can view the status of objectives and rule associations that are enabled in an objective group.

A rule association can have one of the following statuses:

- Success. The rule association ran successfully.
- Validation Error. The record failed the validation. To fix the error, specify valid data in the input fields and submit the record again.
- Exception. The rule association failed due to errors, such as connection timeouts or lack of response from the data provider. To fix the issue, update at least one of the input fields and submit the record again. If the issue persists, contact your administrator.

- Not Run. The rule association didn't run on the record yet. To run the rule association, update at least one of the input fields and submit the record.
- Recommendation Made. The rule association for data enrichment ran, and you are yet to accept or reject one of the recommendations from CLAIRE.
- Outdated. The rule association didn't run after the rule association was updated. To run the rule association, update at least one of the input fields and submit the record.

View the statuses of rule associations

You can view the statuses of rule associations associated with a record to understand the quality of the record.

1. On the record page, click **Actions**, and then select **Data Quality Status**.

   The **Data Quality Status** dialog box appears.
   The following image shows the statuses of sample rule associations that ran on a record:

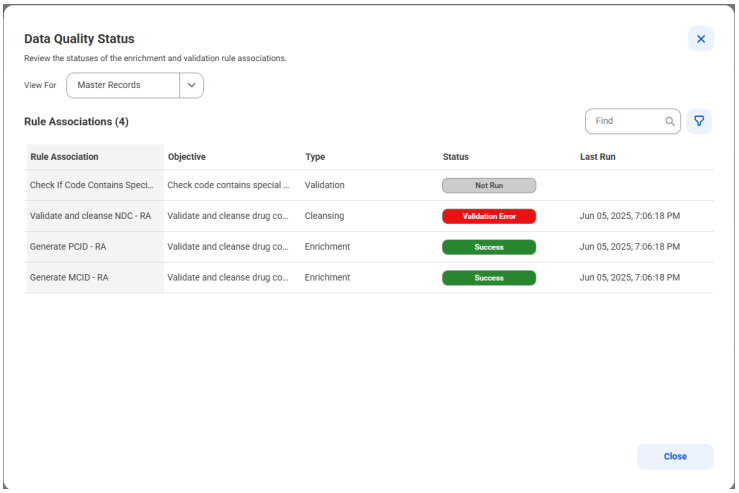

   By default, the dialog box shows the rule association names, the objectives that the rule associations belong to, the rule association type, and the statuses.
2. To view the statuses of rule associations that ran on the master record, select **Master Records** from the **View For** list.
3. To view statuses of rule associations that ran on a specific source record, select the source record from the **View For** list.
4. To understand why a rule association failed with the Exception status, right-click a column, and select the **Exception Details** column.
5. To display additional information, such as input fields and output fields, right-click a column, and select the relevant columns.
6. To filter the entries based on criteria, such as objective, rule association, and status, perform the following steps:
   a. Click the filter icon.
   b. Click **Add Filter**, and then choose one of the following options:
      - Rule association
      - Objective

- Type
- Status
- Last Run

c. Enter a value for the selected criteria.

7. To search for an entry based on a keyword, such as the name of a rule association, type the keyword in the **Find** box.

Restore records

You can restore the deleted master and source records. When you restore the deleted master and source records, the state of these records changes from deleted to active. You can update or delete the active records.

You can restore a deleted master record if at least one source record is active. When you restore the deleted source records, Supplier 360 SaaS recalculates the trust scores of the master record field values based on the survivorship configuration of the active source records.

When you restore a deleted master record, Supplier 360 SaaS restores all the deleted relationships. You can view the restored relationships in the relationship graph, related records section, and hierarchies.

You can also restore the deleted records through file import or record details page. When you search for records, the search results include active records. You can filter and view the deleted records to restore.

Restoring a master record

You can restore a deleted master record if at least one source record is active. When you restore the master record, trust scores are recalculated based on the active source records.

1. From the search results, select a deleted master record.

   You can filter the search results for deleted records by using the **Record State Indicator** filter.
2. Open the record that you want to restore.
3. Click **Actions** > **Restore**.
4. Confirm the action.

   The record is either submitted for approval or restored.

For more information about restored records, see *Restore Records*.

Restoring source records

You can restore deleted source records. When you restore deleted source records, the trust scores of the field values of the master record is recalculated based on the survivorship configuration.

1. From the search results, open the master record for which you want to restore source records.
2. Navigate to the **Source Records** page.
3. Go to the source record that you want to restore, and then click **Actions** > **Restore**.

   The source record is selected.
4. Select any additional source records that you want to restore.
5. Optionally, to view deleted source records that you can restore, use the **Record State Indicator** filter.
6. Click **Restore**.

   A confirmation dialog box appears.

7. Confirm restoration or send for approval.

   The record is either submitted for approval or restored.

For more information about restored records, see *Restore records*.

Restoring a record scenario

You can restore master and source records. If you use Supplier 360 SaaS to restore a master record, the restoration depends on the rank of the Default source system.

Consider a master record in Supplier 360 SaaS with two contributing source records, Record 1 and Record 2.

The following table lists the contributing source records of the master record, their source systems, and source rankings:

Source Record	Source System	Source Rank
Record 1	HR	1
Record 2	Finance	3

The Default source system is ranked 2. In Supplier 360 SaaS, you first delete the master record and then delete both the source records. If you restore Record 2, the source record is restored, but the master record isn't restored because the Default source system is ranked higher than the Finance source system. However, if you try to restore Record 1, the source and master records are restored because the HR source system is ranked higher than the Default source system.

Viewing the history of records

You can view change events, such as create, update, delete, merge, unmerge, and restore along with relationship updates, in the history of records. You can filter the history feed and group it by day, month, or year.

If you suspect that the data in a record has changed inappropriately, you can identify the event that caused the data change.

History page

To view the history of a record, open a record, and click the **History** tab.

The following image shows a sample History page:

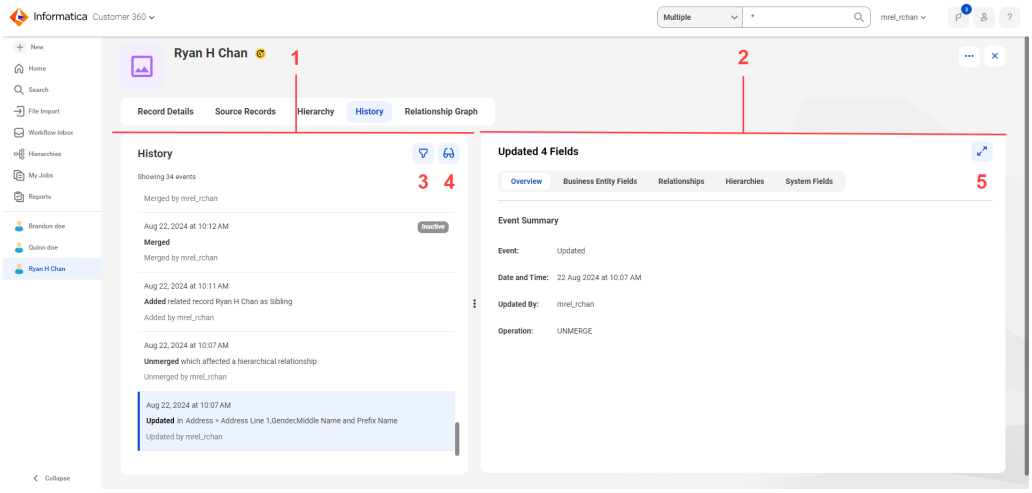

1. History panel
2. Event details panel
3. Show/Hide filter
4. View
5. Expand

Note: The order of the section entries in the history might not match the order of the section entries listed on the record details page.

The following table describes the different user interface elements that you can find on the History page:

User Interface Element	Description
Show/Hide Filter	Displays the **Filter** menu. Click **Add Filter** and select the following values based on which you want to filter the history feed: - Date Range. Filters the history feed based on a date range. You can select Today, Last 7 days, Last 30 days, or Custom. - Event. Filters the history feed based on event types. You can filter based on a single or multiple event types. **Note:** When you filter for Merged events, those events appear for records that merged into master records. To view the corresponding events for those master records, filter for Updated events. - Business Entity Fields. Filters the history feed based on business entity fields. You can filter based on a single business entity field or all fields. - Related Records. Filters the history feed based on related records. You can refine the filter by filtering based on a relationship type and multiple relationship attributes. If you filter based on all relationship types, you can't filter specific relationship attributes. - Hierarchical Relationships. Filters the history feed based on hierarchical relationships that the record belongs to. You can refine the filter by filtering based on a hierarchy model and a relationship type. If you filter based on all hierarchy models, you can't filter specific relationship types.
View	Groups the history feed by day, month, or year. Select one of the following values based on which you want to group the history feed: - Daily. Groups the history feed by day. - Monthly. Groups the history feed by month. - Yearly. Groups the history feed by year.
Expand	Displays the event details in full screen.

Change event details

The event details provide information about a change event. You can view information, such as changes to business entity fields and metadata of a record.

The following table describes event types in the history of a record and the user actions that trigger them:

Event Type	Description
Created	Occurs when a record is created.
Deleted	Occurs when a record is deleted. A Deleted event appears in the history of a record that's restored after deletion.
Restored	Occurs when a record is restored.
Merged	Occurs when a record is merged into a master record.
Unmerged	Occurs when a record is unmerged from a master record and becomes a new master record.
Purged	Occurs when the history of a record is purged. A Purged event appears for a record when the history of the record is being purged. After the retention period, all events in the history of the record are purged.
Added	Occurs when a record is added to a hierarchy or a related record is added to the record.
Removed	Occurs when a record is removed from a hierarchy or a related record is removed.
Updated	Occurs when a record is updated. An Updated event appears for a record in the following scenarios: - Any field of the record is added, edited, or deleted, including when any inapplicable field is removed. - A relationship is edited. - The record is a master record that's created as a result of an unmerge action, with a business ID that was assigned before the unmerge and contributed to the master record that it unmerged from. - Other records are merged into the record.

Preview Notice: Effective in the April 2026 release, the ability to view the history of a record created before the October 2025 release, which contributes to a master record created after the October 2025 release, is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

If you view the full history of a master record that includes the history of its contributing record, two Created events can appear in the history of the record. A Created event appears for the creation of the master record, and another appears for the creation of the contributing record.

To view event details, click an event in the history panel, and then click the following tabs:

- Event Summary. Displays the summary and details of the event. The Event Summary tab appears for delete, merge, unmerge, and restore events, and also for relationship updates. The Event Summary tab doesn't appear for create and update events.
- Business Entity Fields. Displays the changes to the business entity fields.
  To view all the fields, clear **Show the updated fields**.

- Relationship Attributes. Applies to relationship updates. Displays the changes to the relationship attributes.
  To view all the attributes, clear **Show the updated fields**.
- Hierarchies. Applies to hierarchical updates. Displays the changes to the hierarchical relationship attributes.
  To view all the attributes, clear **Show the updated fields**.
- System Fields. Displays the metadata changes.

Exploring the lineage of records

Visualize and explore how a record evolves over time by exploring its merge and unmerge events in an interactive event timeline. You can filter events, and view events grouped by year and month in the timeline.

Lineage page

Use the Lineage page to visualize and explore how a record evolved over time through an event timeline.

The timeline displays up to a total of 1,000 of the most recent merge and unmerge events in chronological order. If a record has 10 or more events, the timeline groups them by year and month.

The following image shows a sample Lineage page displaying the years in which events are grouped:

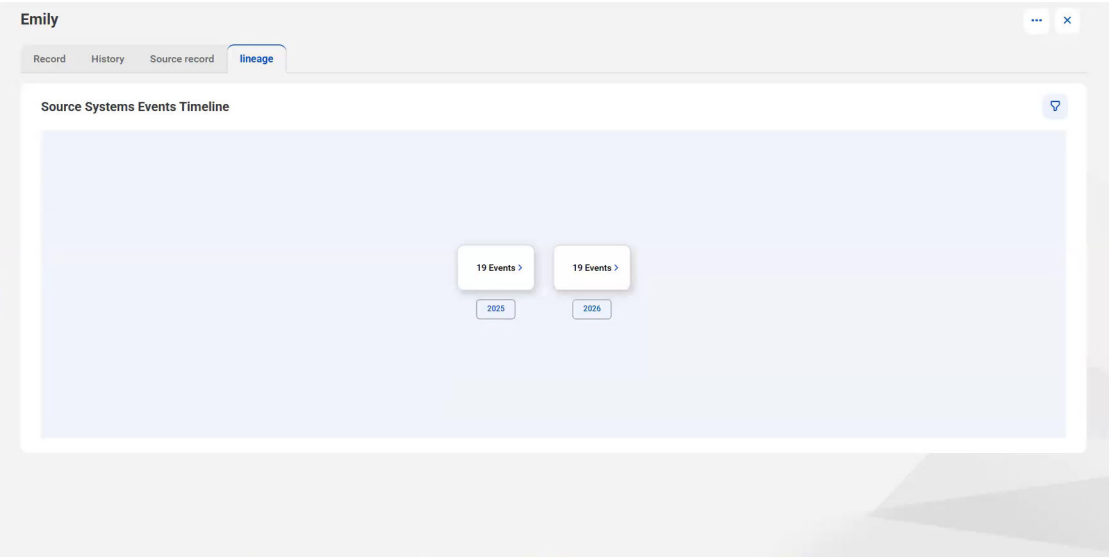

Click a year to expand and view its events grouped by month.

The following image shows a sample Lineage page displaying events from September 2025:

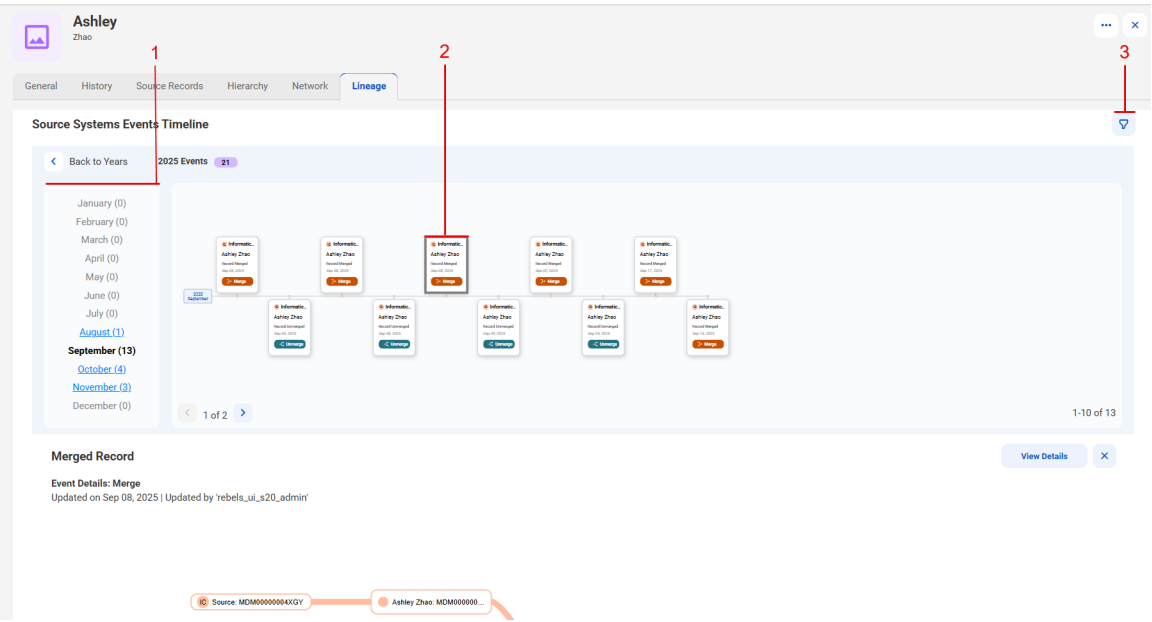

1. Navigation menu
2. Event
3. Show/Hide filter

The following table describes the different user interface elements that you can find on the Lineage page:

User Interface Element	Description
Navigation menu	List of months you can navigate to find events. The list shows each month, along with the number of events for each month.
Event	Displays event details, such as type and date. Click an event to view more details in the event details panel.
Show/Hide Filter	Displays the **Filter** menu. To apply a filter for the events, click **Add Filter** and select from the following options: - Date Range. Filters the history feed based on a date range. You can select Today, Last 7 days, Last 30 days, or Custom. - Event. Filters the events based on event types. You can filter based on merge or unmerge event types. - Business Entity Fields. Filters the events based on business entity fields that were updated as part of the event. You can filter based on a single business entity field or all fields.

Change event details

The event details provide information about a merge or unmerge event for a master record. Event details also provide a graphical chart that shows records that contributed to the master record at the time of the event.

To view event details, click an event in the event timeline. The event details panel shows key details such as the event type and date. You can also view a chart of records that contributed to the master record and records that merged into or unmerged from the master record at the time of the event. In the chart, hover over a record to view the full business ID. The color of each record matches the color of the source system for that record.

The following image shows a sample event details panel displaying details of an unmerge event:

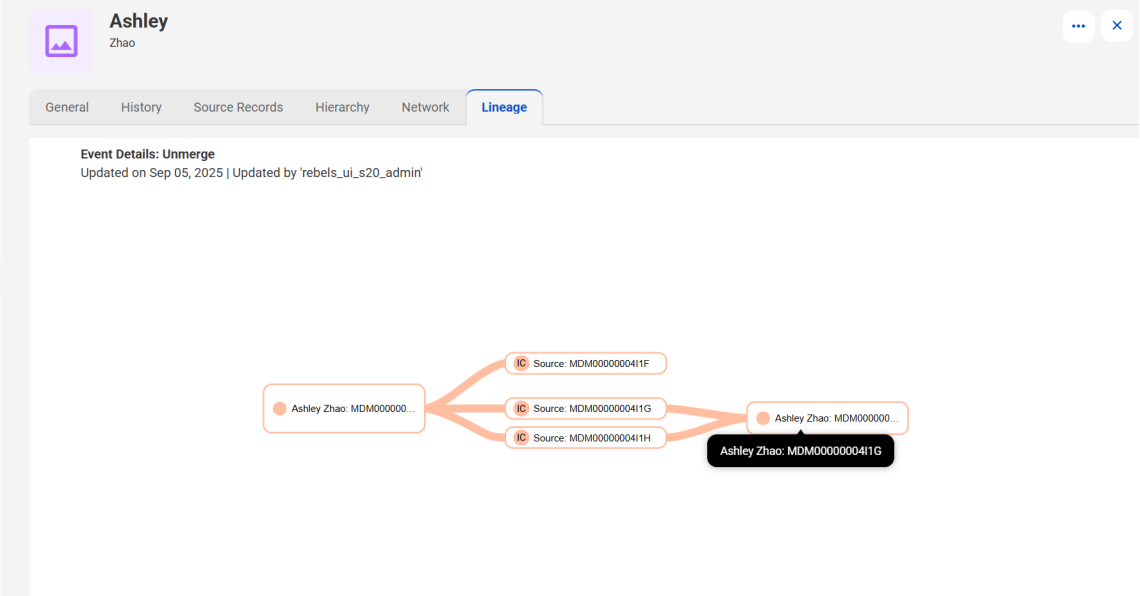

In the unmerge event, the record with business ID MDM00000004I1F unmerged from a master record. The master record received the new business ID MDM00000004I1G.

To view an event summary and other key details, click View Details, and then click the following tabs:

- Event Summary. Displays the summary and details of the event. The Event Summary tab appears for delete, merge, unmerge, and restore events, and also for relationship updates. The Event Summary tab doesn't appear for create and update events.
- Business Entity Fields. Displays the changes to the business entity fields.
  To view all the fields, clear **Show the updated fields**.
- Relationship Attributes. Applies to relationship updates. Displays the changes to the relationship attributes.
  To view all the attributes, clear **Show the updated fields**.
- Hierarchies. Applies to hierarchical updates. Displays the changes to the hierarchical relationship attributes.
  To view all the attributes, clear **Show the updated fields**.
- System Fields. Displays the metadata changes.

Viewing source record details

Source records originate from an external system or from changes made in Supplier 360 SaaS. Source records from multiple source systems contribute to master records.

On the Source Records page, you can view the details of source records and patch records, such as system fields and business entity fields. The source record field values that contribute to master records are highlighted.

The details of source records and patch records in the new experience appear in the following sections:

General Information

Displays the basic field values.

You can use the option to manage source record fields to create a focused view of the records. When you manage fields, you can show, hide, or change their order.

ID

Displays the source record ID and system field details, such as business ID and record state.

Patch Records

Indicates whether a record is a patch record. The value is Yes for patch records and blank for source records.

Source systems legend

Displays the names and icons of source systems.

Dynamic fields and field groups

Displays dynamic fields and field groups. If deduplication is configured for field groups, duplicate field group entries are hidden. If you select the option to show more, duplicate entries appear alongside the contributing entries.

You can navigate dynamic fields and field groups by using the list at the source records level. You can also jump to specific dynamic fields or field groups from the General Information section. To navigate a nested field group level hierarchy, you can use breadcrumbs.

To find entries of a field group that contain specific field values, apply the Field Value filter for that field group. You can configure filter criteria based on fields in the field group, or in a nested field group one level below the field group.

The following image shows a Field Value filter applied at the Insurance field group level to filter field groups where the Policy Number field contains "AAAA1234":

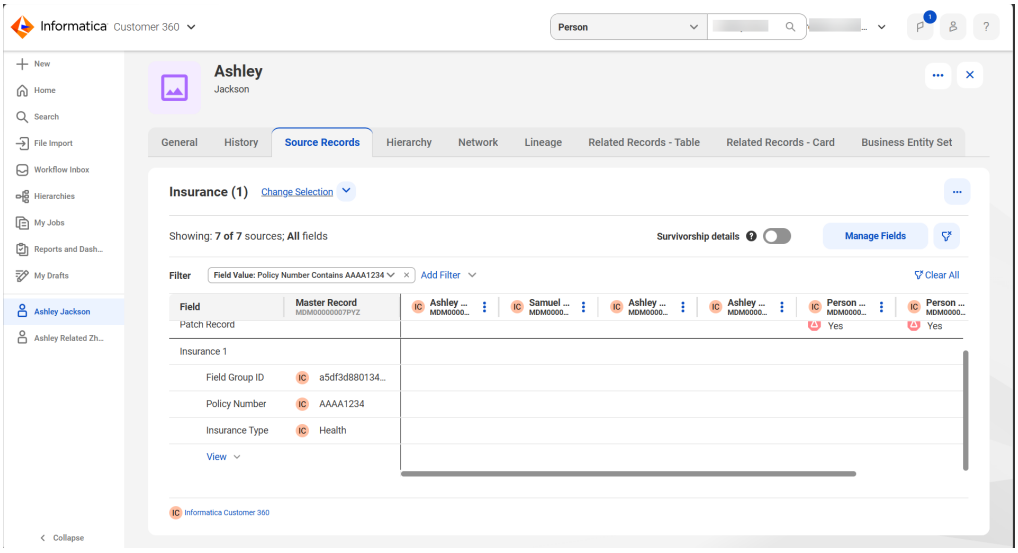

Record pairs

Displays the record pair details associated with a source record or the master record. You can view and export up to 1,000 record pairs.

Choosing records for the match process

To ensure that relevant source records take part in the match process, you can choose to enable or disable matching for source records.

If a source record doesn't have enough information to contribute to the master record, you might want to disable it for the match process. If multiple source records are merged to form a master record, you can unmerge them, and then disable individual source records for the match process.

By default, source records are enabled for the match process. However, when source records are imported into the application, some records might be disabled for matching.

Source records can be disabled from the match process either before or after you import them. If you get additional information for the source records, you can enable the records for the match process.

Enabling or disabling source records from matching

You can enable or disable the participation of source records in the match process.

1. Open a record, and click the **Source Records** tab.

   The **Source Records** page appears.
2. To determine whether the source record is enabled for the match process, review the **Not Ready For Match** system field value.
3. From the **Actions** menu, enable or disable matching.

CHAPTER 4

Manage dashboards

You can use dashboards to visualize reports that provide meaningful insights into your business data and business outcomes. You can view dashboards on the Home page.

You can add charts to dashboards as widgets. You can customize the dashboard by adding or removing the widgets.

Supplier 360 SaaS includes some predefined dashboards. You can create custom dashboards on the Home page and add widgets. The process of creating a dashboard and adding widgets is a one-time effort. You can add these dashboards to the **Home** page by using multiple tabs.

For example, you can create a dashboard to visualize customer details by employment type and validation status of phone numbers.

You can share your dashboards with other users in your organization. When you share a dashboard, other users can view the dashboard along with its widgets in Supplier 360 SaaS.

Note: If your user role doesn't have access privileges to view reports, you can't view the charts added to the dashboards.

Predefined dashboards

The predefined dashboards include a collection of charts and tables arranged in a predefined layout. You can't edit a predefined dashboard. You can view a predefined dashboard on the **Home** page.

Supplier 360 SaaS includes the following predefined dashboards:

- Match Analysis and Explainability
- Usage Statistics

Note: To view predefined dashboards in Supplier 360 SaaS, contact your administrator.

Match Analysis and Explainability dashboard

Use the Match Analysis and Explainability dashboard to explore match results, gain insights into the match process, and understand how record pairs are generated. You can use the match results to fine-tune the match model and gain trust in the quality of the match results.

The Match Analysis and Explainability dashboard includes the following tabs:

- Overview. Shows key metrics of the match process, a visual summary of match trends, and an analysis of match and merge jobs that ran for a business entity.
- Outcome. Displays interactive pie charts of the match and merge outcomes with clickable segments for filtering record pairs. You can also explore individual record pairs.
- Source Systems. Shows a graphical summary of record pairs categorized by source systems. You can filter record pairs based on the selected source system.
- Match Model. Lists the summary of record pairs generated based on the Directed AI match rules. Additionally, you can explore and analyze the record pairs to fine-tune the match model configurations.
- Large Clusters. Shows a graphical summary of large record clusters formed during the match process. Additionally, you can explore and analyze these large clusters and fine-tune the match model configurations to prevent their formation.
- Match Keys Hotspot. Shows the distribution of match keys generated for each field that the candidate selection criteria uses. You can identify potential hotspots with a high concentration of match keys that might result in overmatching. You can also view source records that contain these match keys. You can drill down each key to analyze the hotspots better.

Overview tab

You can view key metrics of the match process, a visual summary of match trends, an analysis of the match and merge jobs, and a list of job instances that ran for a business entity.

The following image displays the Overview tab of the Match Analysis and Explainability dashboard:

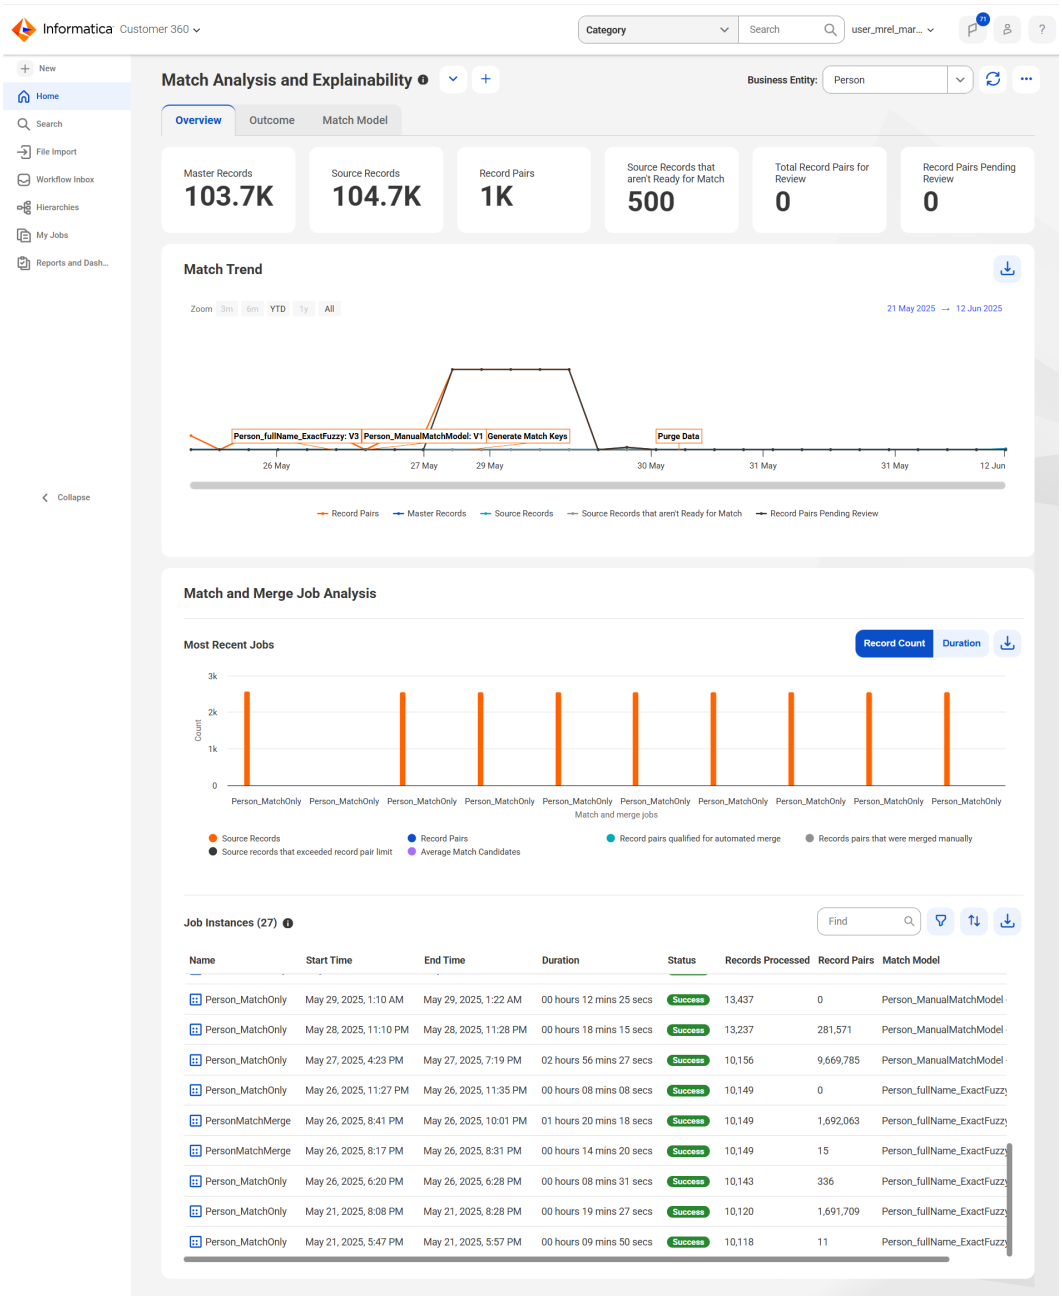

The Overview tab has the following sections:

- Key Metrics
- Match Trend
- Match and Merge Job Analysis
- Job Instances

Key metrics

The Overview tab shows key metrics for the selected business entity from the date when the dashboard is enabled.

The key metrics shows the count of records based on the most recent match job run for the business entity.

The following image shows the key metrics of a business entity on the Match Analysis and Explainability dashboard:

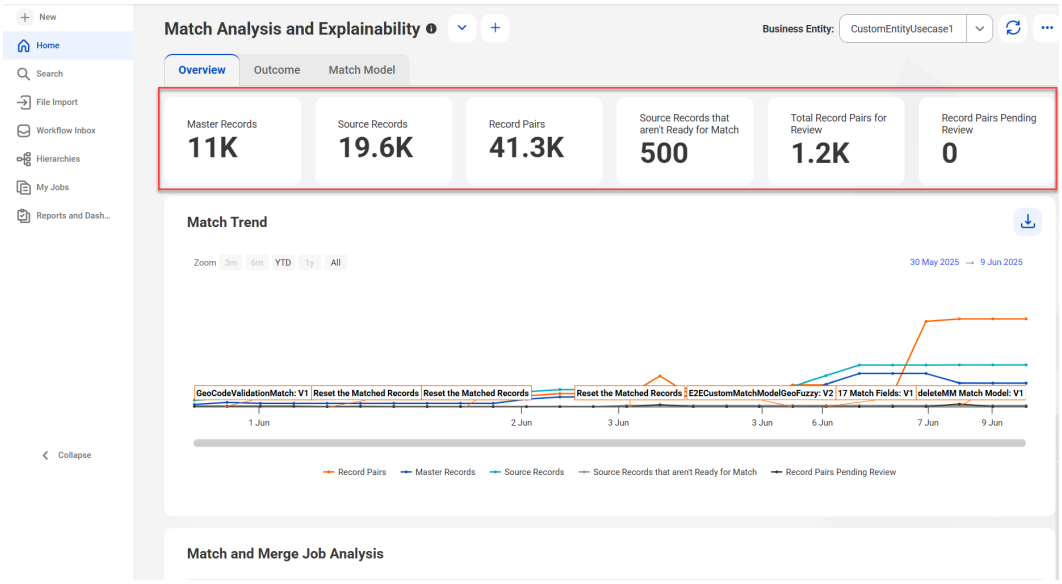

The following table describes the details of key metrics displayed for a business entity:

Name	Description
Master Records	Total number of master records.
Source Records	Total number of source records.
Record Pairs	Total number of record pairs that the match process has identified. **Note:** The count excludes the record pairs that are manually merged in a business application. For more information about merge records from the Search Results page, see .
Source Records that aren't Ready for Match	Number of source records that are set to the NOT_READY_FOR_MATCH state by the users.
Total Record Pairs for Review	Total number of record pairs that are identified for manual review.
Record Pairs Pending Review	Total number of record pairs that are pending review. For example, if 1000 record pairs are identified for manual review and 100 record pairs are reviewed, then the record pairs pending review are 900.

Match trend

The Match Trend section provides a graphical representation of metrics from match and merge jobs, published match models, and batch jobs that ran to reset matched records, purge data, and generate match keys for the selected time period.

It shows the trend for the business entity from the date when the Match Analysis and Explainability dashboard is enabled. You can select a date range to view key metrics on the graph.

The following image displays the Match Trend section of the Overview tab:

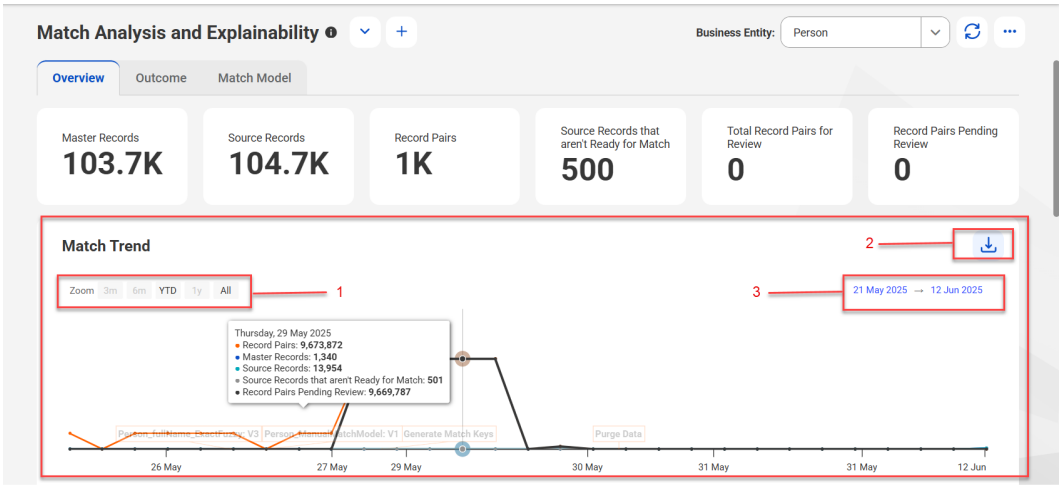

1. Zoom
2. Export Data
3. Date Range

The following table lists the user interface elements that you can use in the Match Trend section:

User Interface Elements	Description
Zoom	View data by months, year, or all data.
Export Data	Exports key metrics of the jobs to a CSV file, that includes the job type and job description.
Date Range	Start and end dates to view the match trend.

Match and merge job analysis

The Match and Merge Job Analysis section displays bar graphs representing metrics for the 10 most recent match and merge jobs.

The graph shows metrics for each job, such as number of source records, record pairs, record pairs that were already merged, record pairs qualified for automated merge, and average match candidates. You can also view the time taken to complete each job. Additionally, the graph shows the time taken for a job to complete when fuzzy match is configured.

Note: The time taken for fuzzy match is longer than the total job duration because it includes the time of multiple parallel processes running within the same job.

The following image shows the Match and Merge Job Analysis section of the Overview tab:

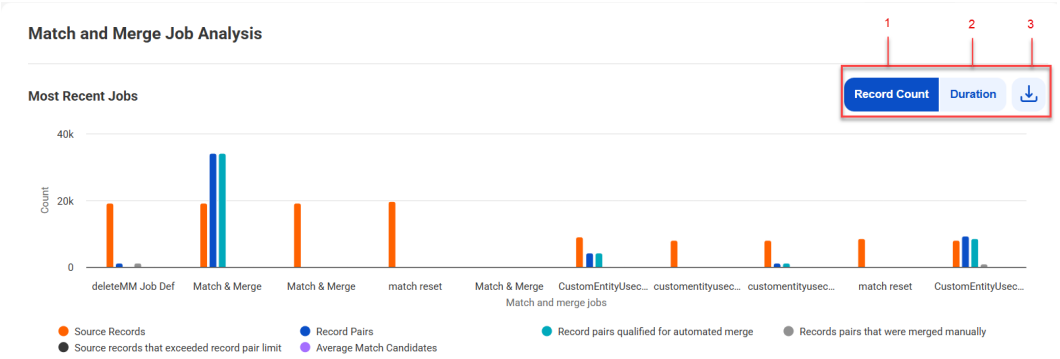

1. Record Count
2. Duration
3. Export Data

The following image shows the duration details of the 10 most recent match and merge jobs:

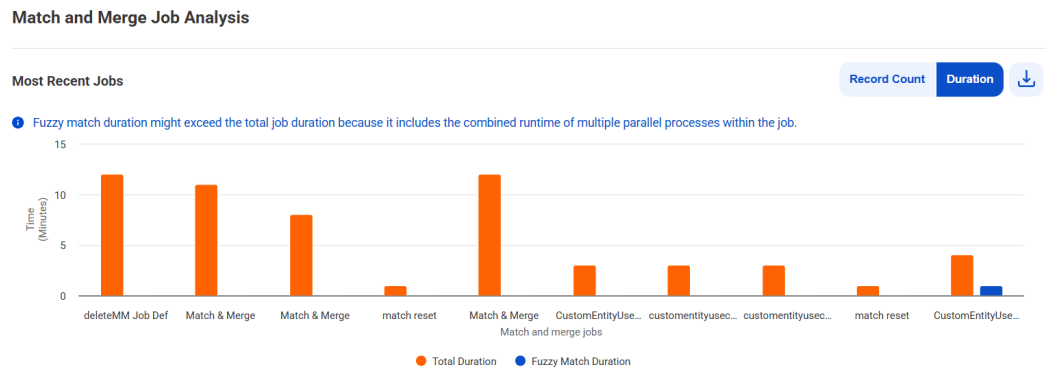

The following table describes the user interface elements that you can use in the Match and Merge Job Analysis section:

Job Details	Description
Record Count	Displays bar graphs for metrics, such as the number of source records, record pairs, source records that exceed record pair limit, record pairs qualified for automated merge, and record pairs merged manually for each job using the bar chart.
Duration	Displays bar graphs for metrics, such as the total duration each job took to complete and total duration a job configured with fuzzy match took to complete.
Export Data	Exports details of the most recent jobs to a CSV file. The CSV file includes the latest 10 jobs run for the business entity and includes details, such as number of source records, record pairs, record pairs that were already merged or qualified for automated merge. It also includes the total and fuzzy match duration for each job.

Job instances

The Job Instances section displays a list of match and merge jobs that ran for a business entity and their details.

The following image displays the Job Instances section of the Overview tab:

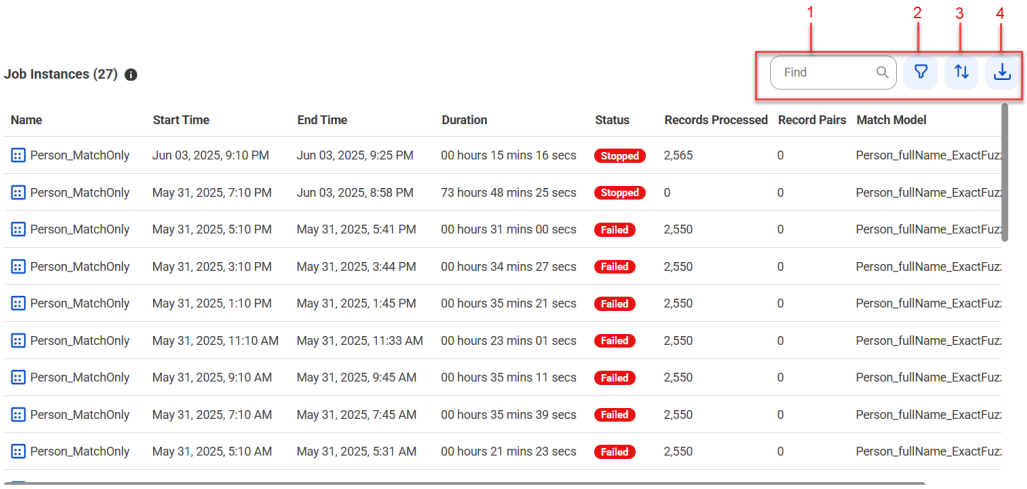

1. Find
2. Filter
3. Sort
4. Export Data

The following table describes the details that you can view for each job instance:

Job Detail	Description
Name	Name of the job instance.
Start Time	Date and time when the job started.
End Time	Date and time when the job ended.
Duration	Total time taken to complete the job.
Status	Status of the job instance.
Records Processed	Number of records that the job processed.
Record Pairs	Number of record pairs that the job generated.
Match Model	Name of the match model that the job used.

The following table describes the user interface elements that you can use in the Job Instances section:

User Interface Elements	Description
Find	Searches jobs based on the job instance name or the match model name.
Filter	Filters jobs based on duration, status, records processed, record pairs, and match models.
Sort	Sorts jobs in ascending or descending order based on a selected column.
Export Data	Exports details of all job instances to a CSV file.

Outcome tab

You can view interactive pie charts of the match and merge outcomes with drill-down capabilities. You can view a list of record pairs generated by the match and merge strategies. Additionally, you can explore individual record pairs.

The Outcome tab consists of the following sections:

- Match Strategy
- Merge Strategy
- Record Pairs

The following image displays the Outcome tab of the Match Analysis and Explainability dashboard:

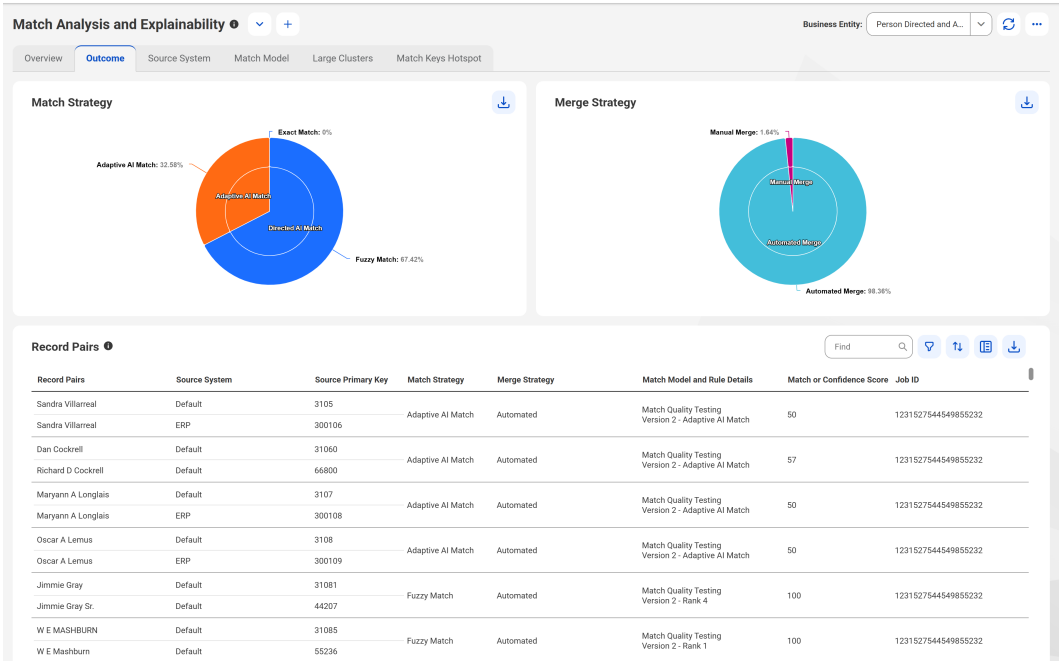

Match strategy

The Match Strategy section displays a pie chart representing the number of record pairs generated by Adaptive AI matching and Directed AI matching using exact and fuzzy rules. Each segment of the pie chart is clickable and filters record pairs based on the selected segment.

The legend shows the percentage of record pairs for each match strategy.

The following image shows the Match Strategy section and the corresponding record pairs in the Record Pairs section:

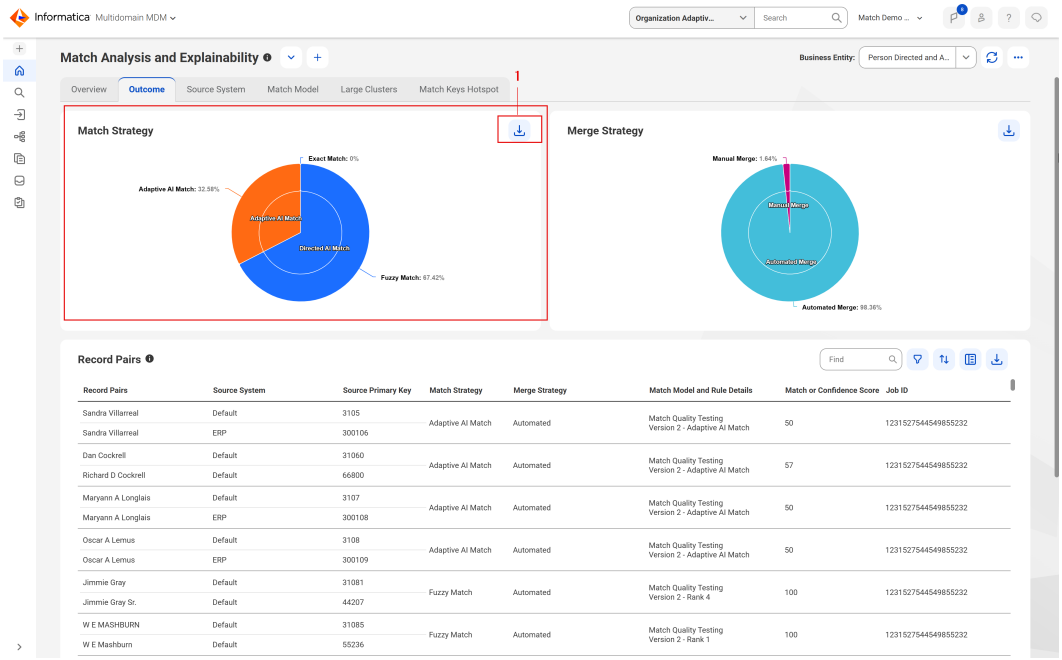

1. Export Data

The following table lists the user interface element that you can use in the Match Strategy section:

User Interface Elements	Description
Export Data	Exports details, such as number and percentage of record pairs generated based on each match strategy to a CSV file.

Merge strategy

The Merge Strategy section displays a pie chart representing the number of record pairs generated based on automated and manual merge rules. Each segment of the pie chart is clickable and filters record pairs based on the selected segment.

The legend shows the percentage of record pairs for each merge strategy.

The following image shows the Merge Strategy section and the corresponding record pair in the Record Pairs section:

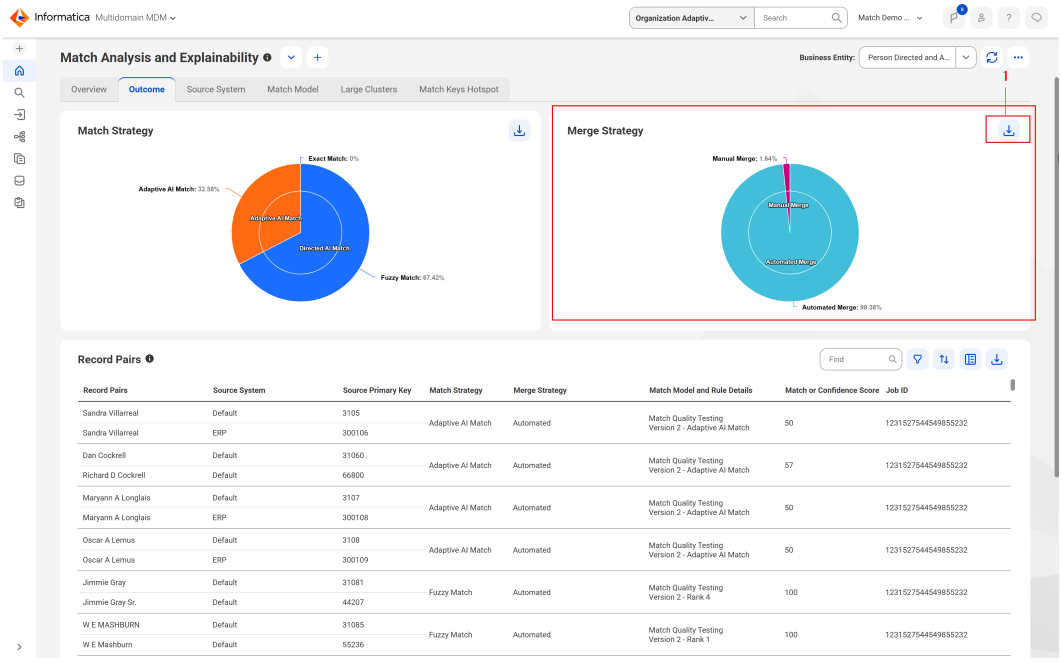

1. Export Data

The following table lists the user interface element that you can use in the Merge Strategy section:

User Interface Elements	Description
Export Data	Exports details, such as the number and percentage of record pairs generated based on each merge strategy to a CSV file.

Record pairs

View the details of record pairs that the match and merge strategies generated.

When you select a section of the match or merge strategy pie chart, the Record Pairs section shows the matched record pairs corresponding to the selection.

The following image displays the Record Pairs section of the Outcome tab:

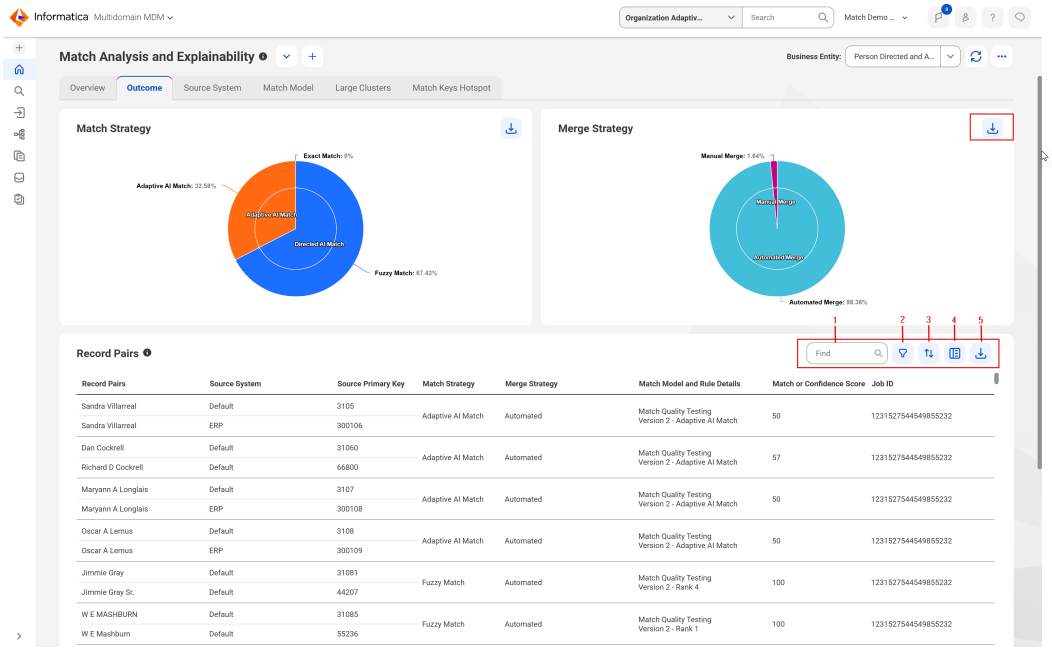

1. Find
2. Filter
3. Sort
4. Show Additional Details
5. Export Data

The following table lists the record pair details you can view for each record pair:

Job Detail	Description
Record	Field values of the record pairs.
Source System	Source system associated with the record pairs.
Source Primary Key	Unique identifier of the source record.
Match Strategy	Type of matching that the directed AI match rule performs, such as exact, fuzzy, or Adaptive AI.
Merge Strategy	Action to perform during the merge process. The values are `Manual` and `Automated`.
Match Model and Rule Details	Name of the match model and the directed AI match rule that the job used.
Match or Confidence Score	Score that indicates how similar the record pairs are.
Matched Date	Date when the record pairs were matched.
Match Fields	Business entity fields of the source records based on which the record pairs are matched.

The following table lists the user interface elements that you can use in the Record Pairs section:

User Interface Elements	Description
Find	Searches the record pairs based on the field value in the Records column.
Filter	Filters record pairs based on source system, match strategy, merge strategy, match model and rule details, total match score, and matched date. You can also select sections of the pie chart to apply filters.
Sort	Sorts the record pairs in ascending or descending order based on a selected column name.
Show Additional Details	Displays the details of a selected record pair in the Record Pair Details section.
Export Data	Exports record pair details to a CSV file.

Record Pair Details section

To view additional details of a record pair, select a record pair and click **Show Additional Details**. You can view details, such as the match fields, match status for exact matches, and match scores for fuzzy matches.

The following image shows the record details of the record pair selected in the Record Pairs section:

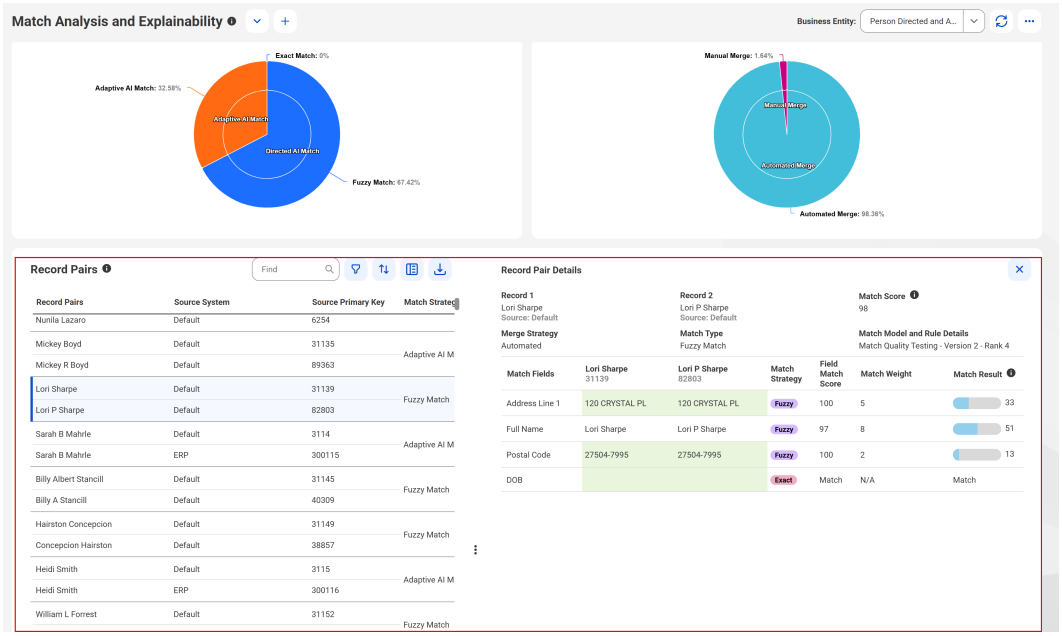

The following table lists the details of the selected record pair:

Record Pair Details	Description
Record 1	Name of the first source record in the selected record pair.
Record 2	Name of the second source record in the selected record pair.

Record Pair Details	Description
Total Match Score	Score that indicates how similar the record pairs are. The value is the sum of match scores of fuzzy match fields. **Note:** A decimal value is rounded off to display the total match score.
Merge Strategy	Action to perform during the merge process. The values are `Manual` and `Automated`.
Match Type	Type of matching that the directed AI match rule uses, such as directed AI match or adaptive AI match.
Match Model and Rule Details	Name of the match model and the directed AI match rule that the job used.
Match Fields	Name of the business entity fields that the directed AI match rule uses for matching.
Match Strategy	Type of match that the directed AI match rule performs.
Match Score	Score that indicates how similar the match fields of the record pairs are. Applicable to directed AI match rules with the fuzzy match strategy.
Confidence Score	Score that indicates how similar the match fields of the record pairs are. Applicable to Adaptive AI match rules.
Contribution	Score that indicates how each match field influences prediction outcomes. Positive score indicates support for matches and negative score indicates support for non-matches.
Contribution to the Total Match Score	Match status for exact match fields, and shows the match score contribution of fuzzy match fields to the total match score.

Source System tab

Use the Source System tab to view a graphical summary of record pairs categorized by source systems. You can view a heat map of record pairs originating from each source system or from a combination of two source systems. Additionally, view a bar chart that displays the number of source records from each source system. When you click the heat map, you can filter record pairs by source systems and then explore individual record pairs.

Note: The Source System tab displays data after a match job has run following the October 2025 release. The data includes both the current job data and the historical data from previously run jobs.

The following image shows the Source System tab of the Match Analysis and Explainability dashboard:

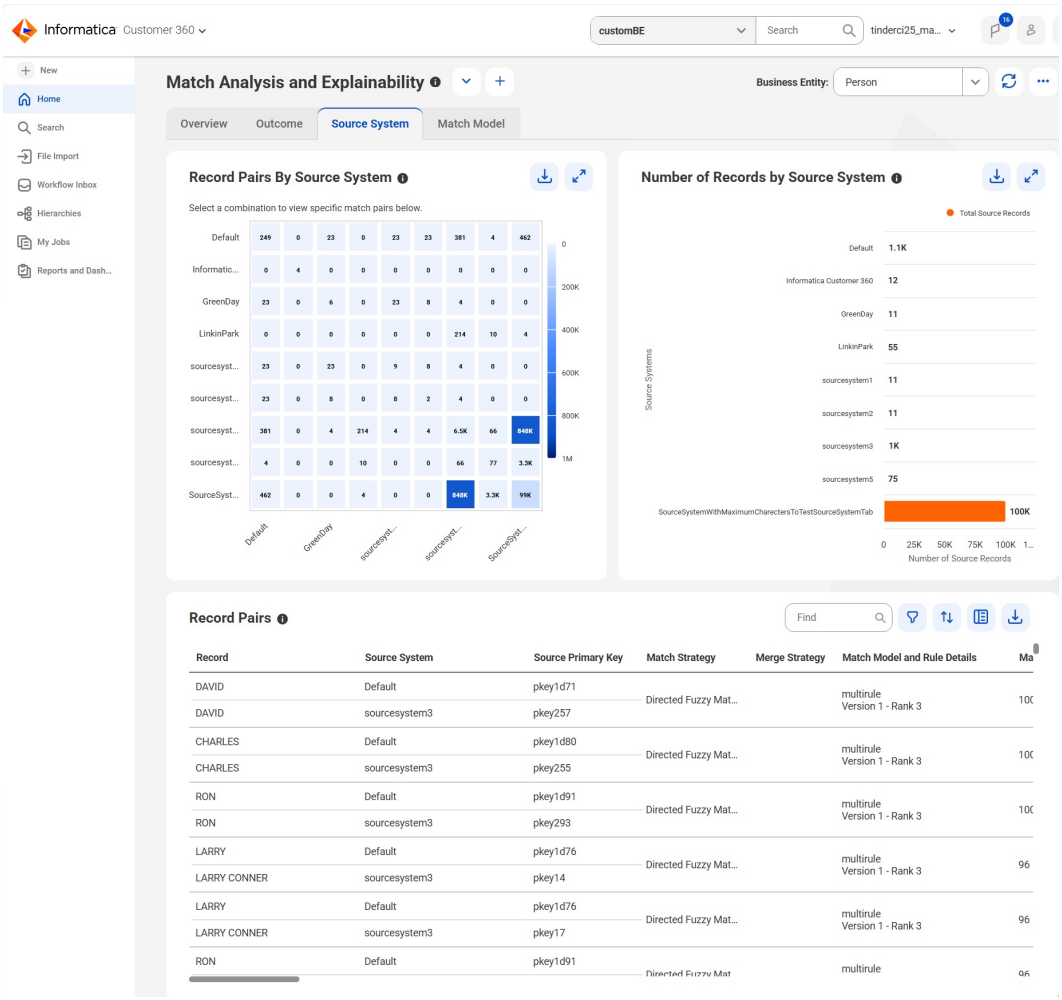

The Source System tab consists of the following sections:

- Record Pairs by Source System
- Number of Records by Source System
- Record Pairs

Record Pairs by Source System

The Record Pairs by Source System section displays a heat map that represents the distribution of record pairs across source systems.

When you select a cell in the heat map that corresponds to source systems, you can view the count of record pairs and their details.

The following image shows the Record Pairs by Source System section and the corresponding record pairs in the Record Pairs section:

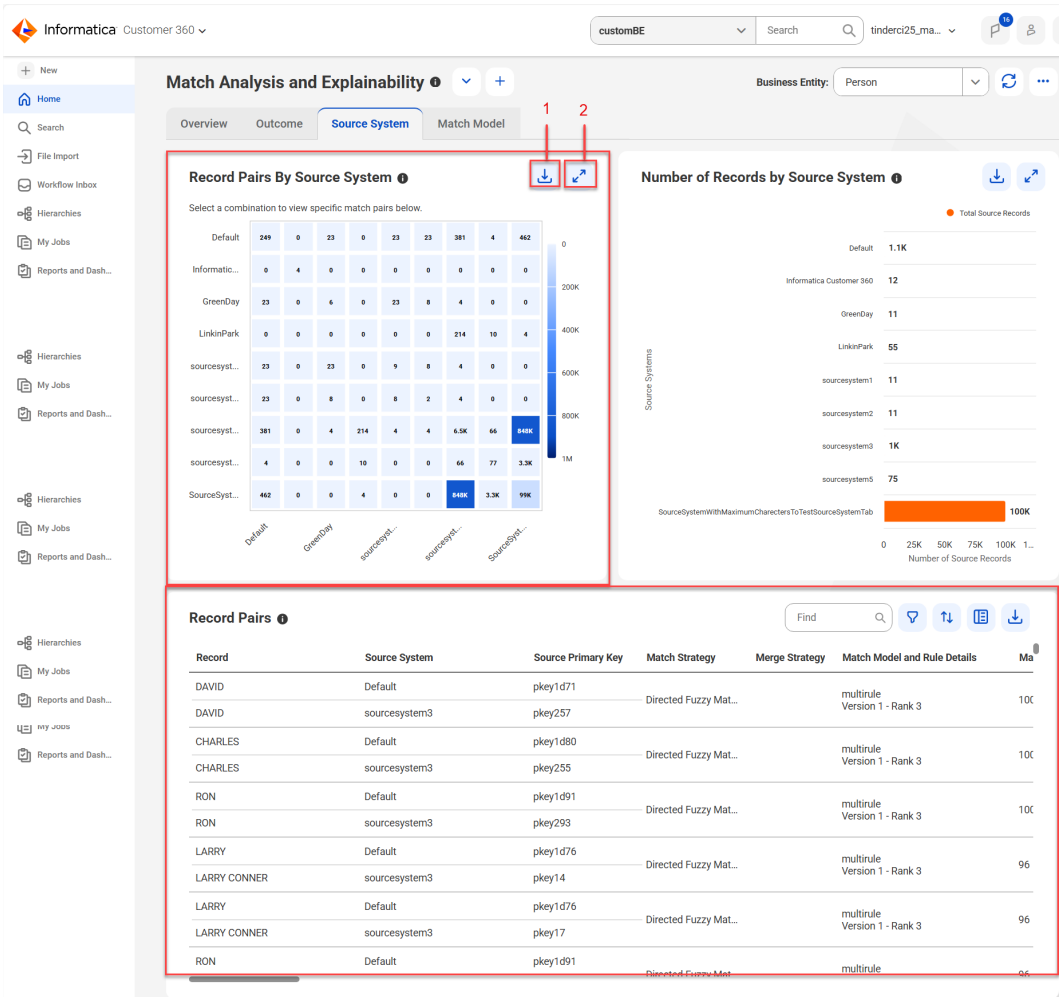

1. Export Data
2. Full Screen

The following table describes the user interface elements that you can use in the Record Pairs by Source System section:

User Interface Elements	Description
Export Data	Exports details, such as the total number of record pairs contributed by the selected source systems, to a CSV file.
Full Screen	Maximizes the Record Pairs by Source System section to view the heat map in full screen.

Number of Records by Source System

The Number of Records by source system section displays a bar chart representing the total number of records from each source system.

The following image shows the Number of Records by Source System section:

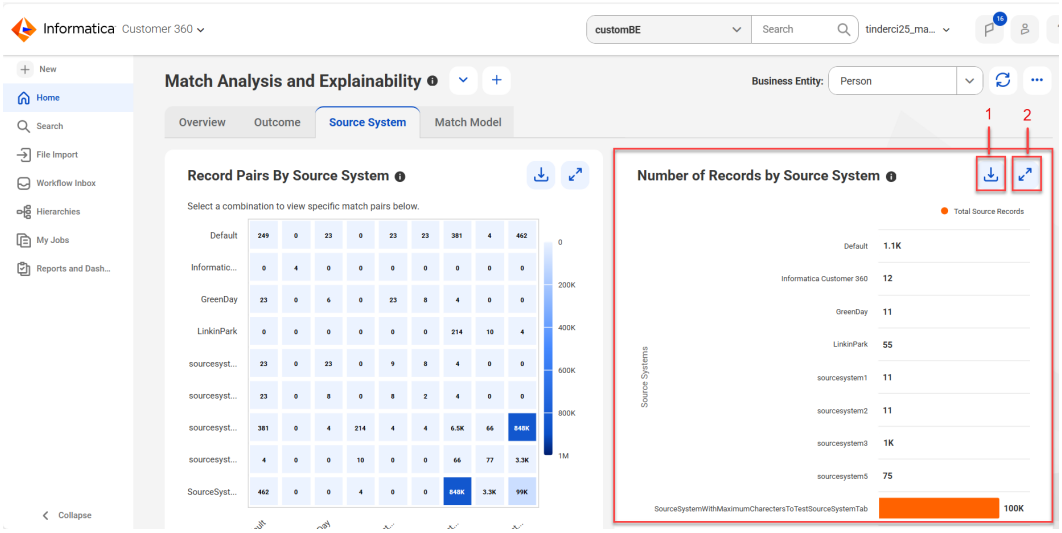

1. Export Data
2. Full Screen

The following table describes the user interface elements that you can use in the Number of Records by Source System section:

User Interface Elements	Description
Export Data	Exports details, such as the total number of record pairs for each source system, to a CSV file.
Full Screen	Maximizes the Record Pairs by Source System section to view the heat map in full screen.

Record Pairs

The Record Pairs section displays the details of record pairs associated with source systems.

When you select source systems in the heat map, the Record Pairs section filters the record pairs from the selected source systems.

The following image displays record pairs in the Record Pairs section for the source systems selected in the heat map:

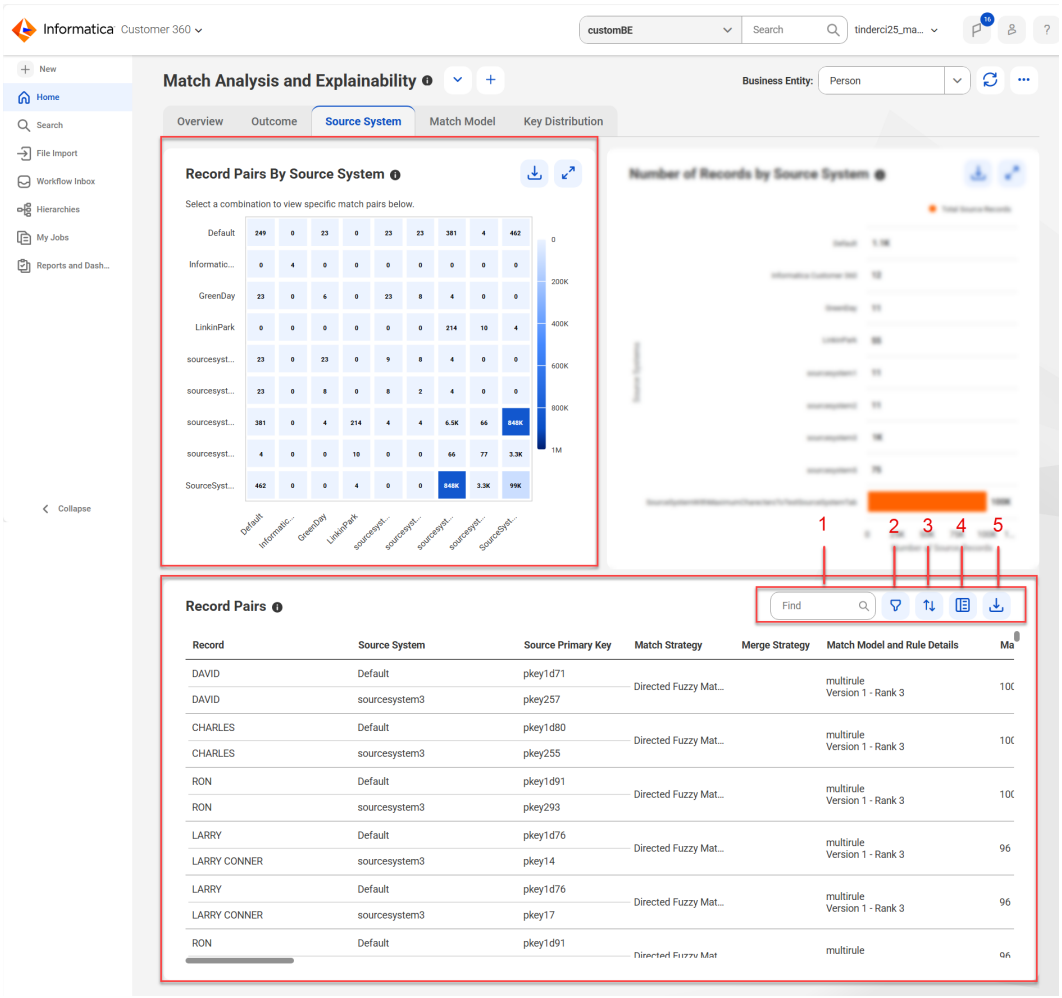

1. Find
2. Filter
3. Sort
4. Show Additional Details
5. Export

The following table describes the columns in the Record Pairs section:

Record Pair Property	Description
Record	The display name of records in the record pairs.
Source System	Source system associated with the record.
Source Primary Key	Unique identifier of the record.
Match Strategy	Type of match strategy that identified the record pair, such as exact, fuzzy, or Adaptive AI.
Merge Strategy	Type of merge strategy to use during the merge process. The values are `Manual` and `Automated`.

Record Pair Property	Description
Match Model and Rule Details	Name of the match model and the Directed AI match rule that identified the record pair.
Match or Confidence Score	A score that indicates how similar the record pairs are.
Record Pair Creation Date	Date when the record pairs were matched.
Match Fields	Business entity fields based on which the record pairs were matched.

Record Pair Details

When you select a record pair, the additional details of a record pair appear in the Record Pair Details section.

The following image displays the additional details of a record pair:

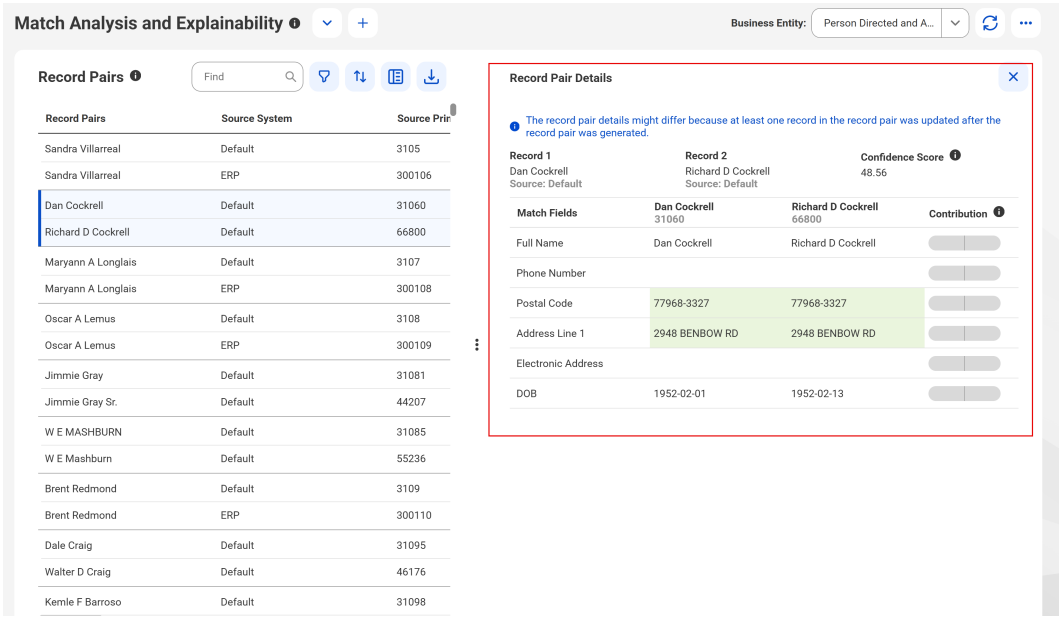

The following table describes the user interface elements that you can use in the Record Pairs section:

User Interface Elements	Description
Find	Search the record pairs based on the column values.
Filter	Filter record pairs based on column values, such as source systems, match strategy, merge strategy, match model and rule details, match score, and record pair creation date.
Sort	Sort the record pairs based on the selected column.
Show Additional Details	Displays additional details, such as field match score, match weight, and match result, of a selected record pair in the Record Pair Details section.
Export Data	Export record pair details to a CSV file.

The following table describes additional details that you can view in the Record Pair Details section:

Record Pair Details	Description
Record 1	The display name of the of the first source record in the record pair and the source system to which the record belongs.
Record 2	The display name of the second source record in the record pair and the source system to which the record belongs.
Match Score	Score that indicates how similar the record pairs are. Applicable to record pairs that were identified by directed AI match rules that use fuzzy match strategy.
Confidence Score	Score that indicates how similar the record pairs are. Applicable to record pairs that were identified by adaptive AI match rules.
Contribution	Score that indicates how each match field influences prediction outcomes. Positive score indicates support for matches and negative score indicates support for non-matches.
Match Fields	Name of the business entity fields that matched the record pairs.
Merge Strategy	Type of merge strategy to use during the merge process. The values are `Manual` and `Automated`.
Field Match Score	The score assigned to match fields within a record pair based on the similarity of their values. The higher the score, the more similar the values are. Applicable to Directed AI match rules with fuzzy match strategy.
Match Weight	Indicates the weight or importance of a match field within a record pair. Match weight is a decimal number that varies based on the field type configured in the match model. Fields with higher match weight are given greater importance during the match process. For example, if the field type selected in the match model is Person_Name, the match process assigns greater importance to the Full Name field than to the Address Line 1 field.
Match Result	Displays the weighted match score for fuzzy match fields, and displays **Match** as the status for exact match fields. The weighted match score is calculated by multiplying the match weight by the field match score for each match field. For example, if the match weight for the Full Name field is 0.3 and the field match score is 96, the weighted match score would be 0.3 × 96 = 28. If the overall match score for this record pair is 100, then 28 is the weighted match score contributed by the Full Name field.

Match Model tab

You can view a summary of record pairs identified by rank-based Directed AI match rules, threshold-based Directed AI match rules, and Adaptive AI match models. You can explore and analyze record pairs identified by each Directed AI match rules.

Use the Match Model tab to explore the summary of match results and gain insights into the match process. You can also modify the match configuration to get trust match outcomes. For example, if a Directed AI match rule didn't generate any match pairs, you can consider removing it or updating its properties.

Additionally, you can click on the percentage of record pairs in each Directed AI match rule to further explore and analyze the record pairs identified by that match rule.

The following image displays the Match Model tab of the Match Analysis and Explainability dashboard:

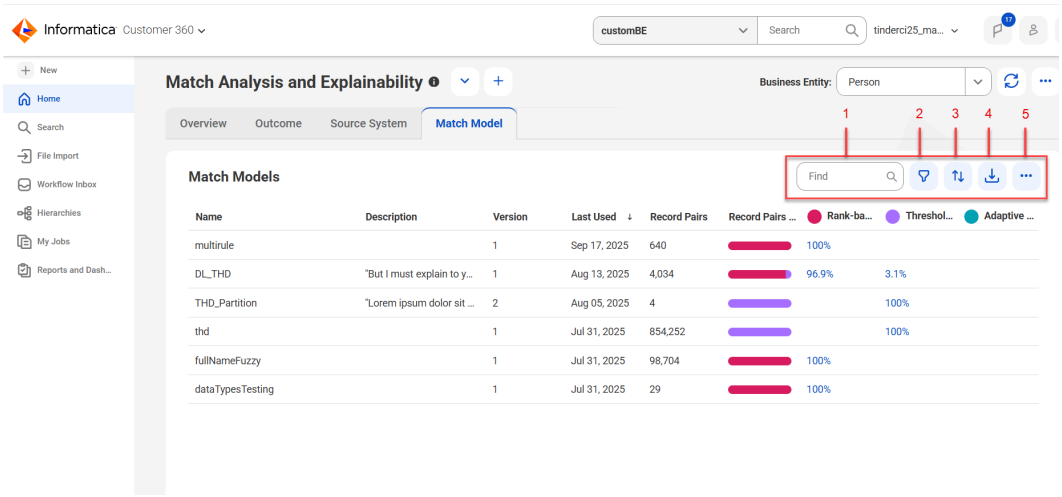

1. Find
2. Filter
3. Sort
4. Export Data
5. View Record Pairs Summary

The following table lists the details you can view in the Match Model tab:

Job Detail	Description
Name	Name of the match model that contains the Directed AI match rule.
Description	Short description to identify a Directed AI match rule.
Version	Version of the match model.
Last Used	Date when the record pairs were matched.
Record Pairs	Total number of record pairs including rank-based Directed AI rules, threshold-based Directed AI rules, and Adaptive AI Models.
Rank-based Directed AI Rules	Percentage of record pairs based on rank-based Directed AI rules.
Threshold-based Directed AI Rules	Percentage of record pairs based on threshold-based Directed AI rules.
Adaptive AI Models	Percentage of record pairs based on Adaptive AI Models.

The following table lists the user interface elements that you can use in the Match Model tab:

User Interface Elements	Description
Find	Searches based on the match model name and description.
Filter	Filters based on name, description, version, matched date, record pairs, and Directed AI match rules.
Sort	Sorts the record pairs in ascending or descending order based on a selected column name.

User Interface Elements	Description
Export Data	Exports the details in the Match Model tab to a CSV file.
View Record Pairs Summary	Summary of total record pairs from active, deleted, and all match models.

Rank-based rules

The Rank-based rules section lists the directed AI match rules that are ranked in a match model. You can view a list of directed AI match rules with their ranks, the configuration, the associated match model, and the number of record pairs they identified.

The following image displays the Rank-based Rules section of the Match Model tab:

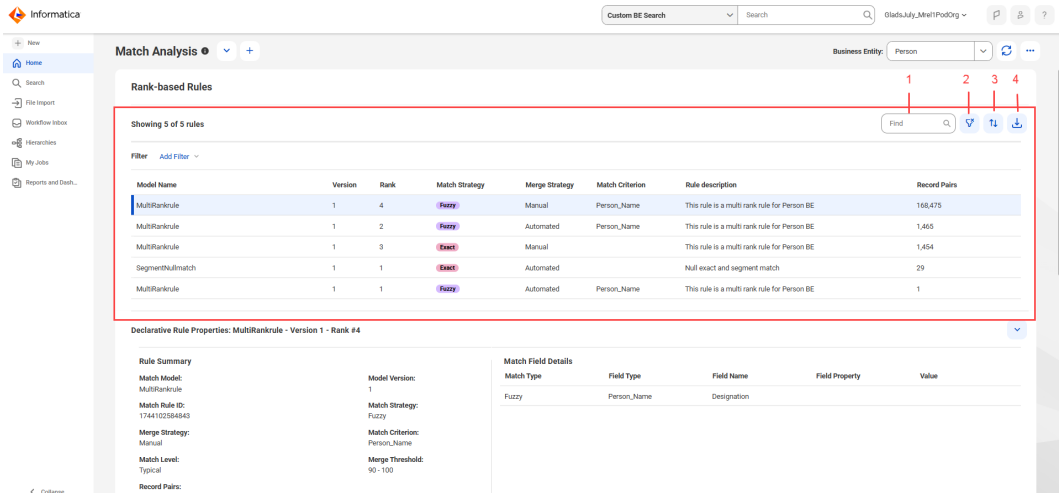

1. Find
2. Filter
3. Sort
4. Export

The following table describes the details that the Rank-based Rules section displays:

Name	Description
Model Name	Name of the match model that contains the directed AI match rule.
Version	Version of the match model.
Rank	Execution order of the directed AI match rule in the match model.
Match Strategy	Type of match that the directed AI match rule performs.
Merge Strategy	Action to perform during the merge process. The values are `Manual` and `Automated`.
Match Criterion	Type of data to use for matching. Applicable to directed AI match rules with the fuzzy match strategy.

Name	Description
Rule Description	Short description to identify a directed AI match rule.
Record Pairs	Number of record pairs that the directed AI match rule identified.

The following table lists the user interface elements that you can use in the Rank-based Rules section:

User Interface Elements	Description
Find	Search the directed AI match rules based on the column values.
Filter	Filter directed AI match rules based on the column values.
Sort	Sorts the directed AI match rules in ascending or descending order based on the selected column name.
Export Data	Export details of the directed AI match rules to a CSV file. The CSV file includes properties of directed AI match rules, such as model name, version, and match criterion.

Record pairs from threshold-based rules

The Match Model page lists the threshold-based Directed AI match rules in a match model and the number of record pairs generated based on each rule.

To open the Record Pairs from Threshold-Based Rules page, click the percentage value in the Threshold-based Directed Rules column in the Match Model page.

The following image displays the Record Pairs from Threshold-Based Rules page:

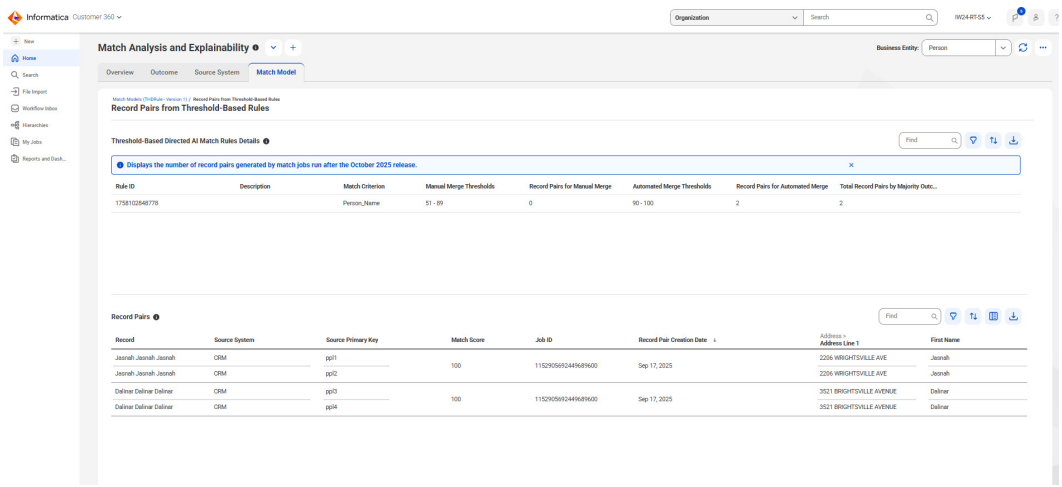

The Record Pairs from Threshold-Based Rules page has the following sections:

- Threshold-Based Directed AI Match Rules Details
- Record Pairs

Threshold-based Directed AI match rules details

The Threshold-Based Directed AI Match Rules Details section lists the Directed AI match rules in a match model. You can view a list of Directed AI match rules, the merge thresholds for automated and manual merge strategies, the number of record pairs identified for manual and automated merges, and the total record pairs determined by the majority outcome of the rules.

The following image displays the Threshold-Based Directed AI Match Rules Details section:

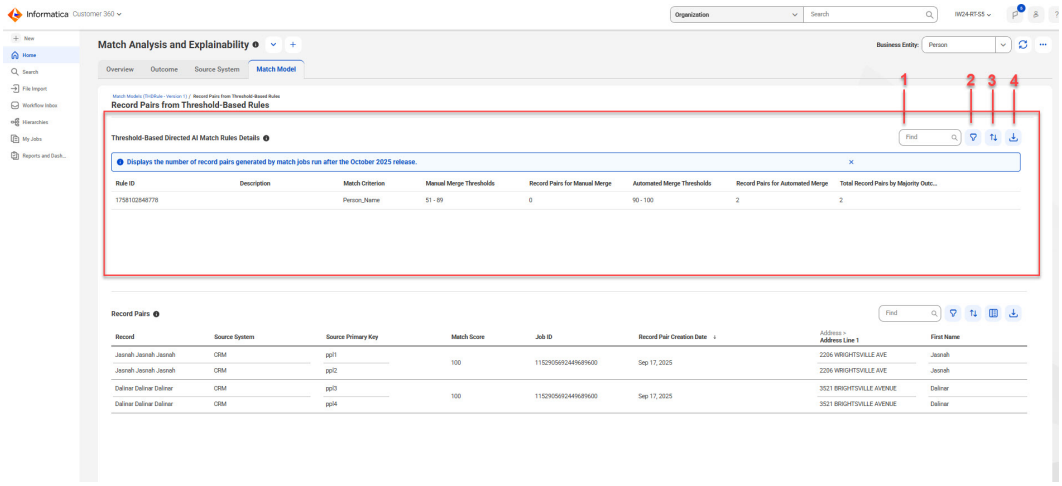

1. Find
2. Filter
3. Sort
4. Export

The following table describes the user interface elements that you can use in the Threshold-Based Directed AI Match Rules Details section:

User Interface Elements	Description
Find	Search the Directed AI match rules based on the column values.
Filter	Filter Directed AI match rules based on the column values.
Sort	Sort the Directed AI match rules in ascending or descending order based on the selected column name.
Export Data	Export details of the Directed AI match rules to a CSV file.

The following table describes the rule details that the Threshold-Based Directed AI Match Rules Details table displays:

Name	Description
Rule ID	System-generated identifier of the Directed AI match rule.
Description	Short description to identify a Directed AI match rule.

Name	Description
Match Criterion	Type of data to use for matching. Applicable to Directed AI match rules with the fuzzy match strategy.
Manual Merge Thresholds	Merge threshold configured for the manual merge strategy.
Record Pairs for Manual Merge	Total number of record pairs identified for manual merge.
Automated Merge Thresholds	Merge threshold configured for the automated merge strategy.
Record Pairs for Automated Merge	Total number of record pairs identified for automated merge.
Record Pairs by Majority Outcome of Rules	Total number of record pairs for which the rule agreed with the majority decision.

Match field details

You can view details of a Directed AI match rule, such as the match strategy, field type, field name, field property, and value. To view the details, select a rule and click **View Match Field Details**.

The following image shows the match field details of a selected Directed AI match rule:

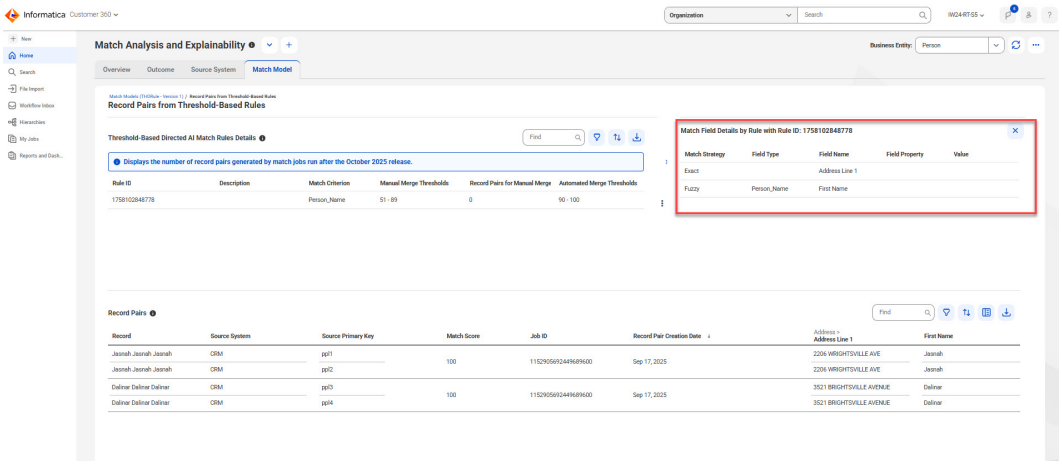

The following table describes the match field details of a selected Directed AI match rule:

Match Field Details	Description
Match Strategy	Type of match strategy that the Directed AI match rule uses, such as exact or fuzzy.
Field Type	Type of data that the match field contains. Applicable to Directed AI match rules with the fuzzy match strategy.
Field Name	Name of the business entity field that the Directed AI match rule uses for matching. Applicable to Directed AI match rules with the fuzzy match strategy.

Match Field Details	Description
Field Property	Additional properties configured for the match field, such as segment matching and null matching.
Value	Value to identify segment data for matching.

Record pairs

You can view the details of record pairs that the threshold-based Directed AI match rules generated.

When you select a rule in the Threshold-Based Directed AI Match Rules Details section, the Record Pairs section shows the record pairs associated with the selected rule.

The following image displays the Record Pairs section of the Record Pairs from Threshold-Based Rules page:

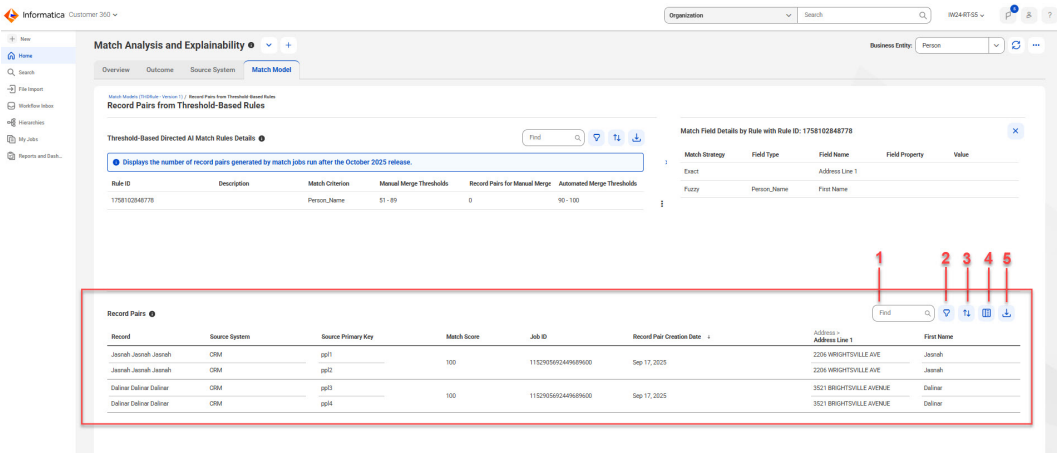

1. Find
2. Filter
3. Sort
4. Show Additional Details
5. Export Data

The following table describes the user interface elements that you can use in the Record Pairs section:

User Interface Elements	Description
Find	Search the record pairs based on the field value in the Records column.
Filter	Filter record pairs based on matched date, match score, and source systems.
Sort	Sort the record pairs in ascending or descending order based on a selected column name.
Show Additional Details	Displays the details of a selected record pair in the Record Pair Details section.
Export Data	Export record pair details to a CSV file.

The following table describes the record pair details you can view for each record pair:

Record Pair Details	Description
Record	Display name of records in the record pairs.
Source System	Source system associated with the record pairs.
Source Primary Key	Unique identifier of the source record.
Match Score	Score that indicates how similar the record pairs are.
Job ID	Unique identifier of the job instance that used the Directed AI match rule to match record pairs.
Matched Date	Date when the record pairs were matched.
Match Fields	Business entity fields of the source records based on which the record pairs are matched.

Record pair details

You can view details of record pair, such as the match fields, match status for exact matches, and match scores for fuzzy matches. To view the details, select a record pair and click **Show Additional Details**.

The following image shows the details of the record pairs selected in the Record Pairs section:

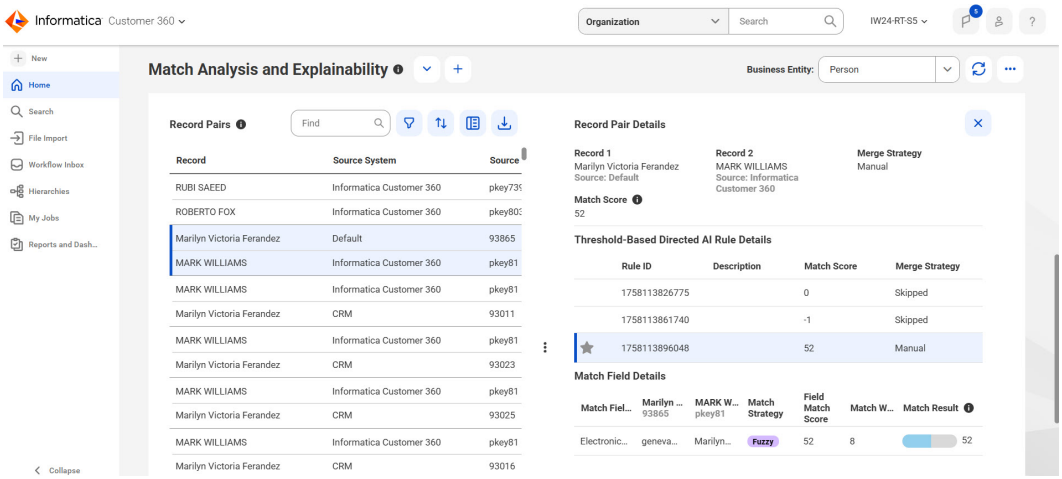

The following table describes the record pair details of the selected record pair:

Record Pair Details	Description
Record 1	Display name of the first source record in the selected record pair.
Record 2	Display name of the second source record in the selected record pair.
Merge Strategy	Type of merge strategy to use during the merge process. The values are `Manual` and `Automated`.
Match Score	Score that indicates how similar the record pairs are. The value is the sum of match scores of fuzzy match fields. **Note:** A decimal value is rounded off to display the total match score.

Record Pair Details	Description
Rule ID	System-generated identifier of the Directed AI match rule that generated the record pairs. **Note:** The rule marked with the star icon indicates that the rule contributed to the total match score.
Description	Short description to identify a Directed AI match rule.
Match Fields	Name of the business entity fields that the Directed AI match rule uses for matching.
Field Match Score	The score assigned to match fields within a record pair based on the similarity of their values. The higher the score, the more similar the values are. Applicable to Directed AI match rules with fuzzy match strategy.
Match Weight	Indicates the weight or importance of a match field within a record pair. Match weight is a decimal number that varies based on the field type configured in the match model. Fields with higher match weight are given greater importance during the match process. For example, if the field type selected in the match model is Person_Name, the match process assigns greater importance to the Full Name field than to the Address Line 1 field.
Match Result	Displays the weighted match score for fuzzy match fields, and displays **Match** as a status for exact match fields. The weighted match score is calculated by multiplying the match weight by the field match score for each match field. For example, if the match weight for the Full Name field is 0.3 and the field match score is 96, the weighted match score would be 0.3 × 96 = 28. If the overall match score for this record pair is 100, then 28 is the weighted match score contributed by the Full Name field.

Record pairs from Adaptive AI match model

An Adaptive AI match model is trained to predict whether record pairs match. Based on the training, the model learns to make match predictions independently and identify matching record pairs.

The Record Pairs page in the Adaptive AI Match Model lists record pairs that matched based on the predictions from an Adaptive AI match model. To open the Record Pairs from Adaptive AI Match Model page, click the percentage value in the Record Pairs in the Adaptive AI Match Model column in the Match Model page.

The following image displays the Record Pairs from the Adaptive AI Match Model page:

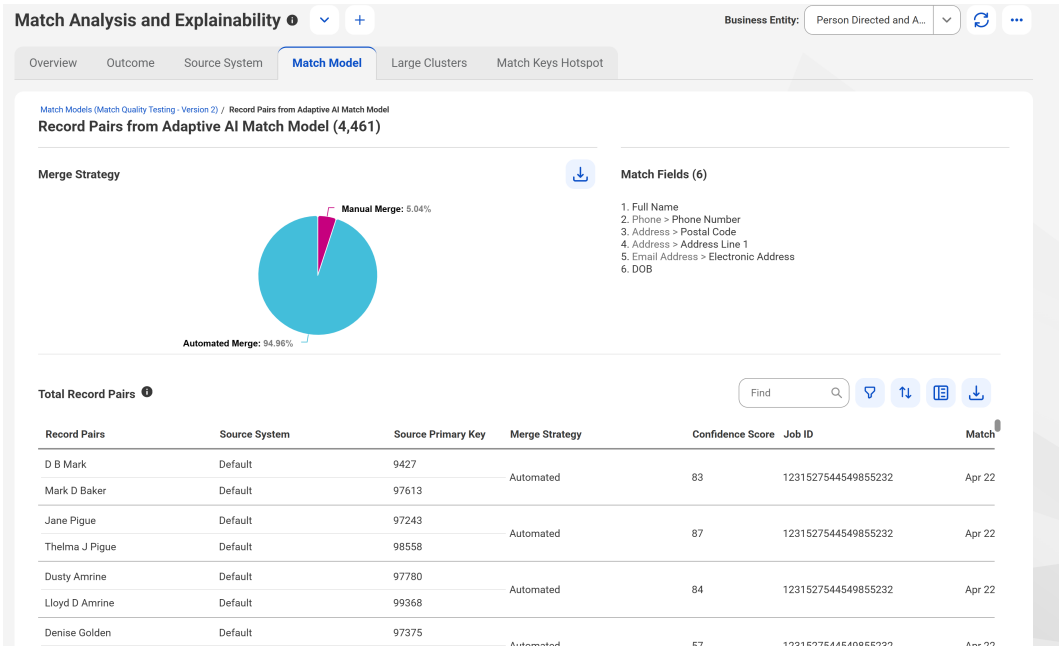

The Record Pairs from Adaptive AI Match Model page has the following sections:

- Merge Strategy
- Match Fields
- Total Record Pairs

Merge strategy

The Merge Strategy section displays a pie chart representing the number of record pairs generated based on automated and manual merge rules. Each segment of the pie chart is clickable and filters record pairs based on the selected segment.

The legend shows the percentage of record pairs for each merge strategy.

The following image shows the Merge Strategy section and the corresponding record pair in the Total Record Pairs section:

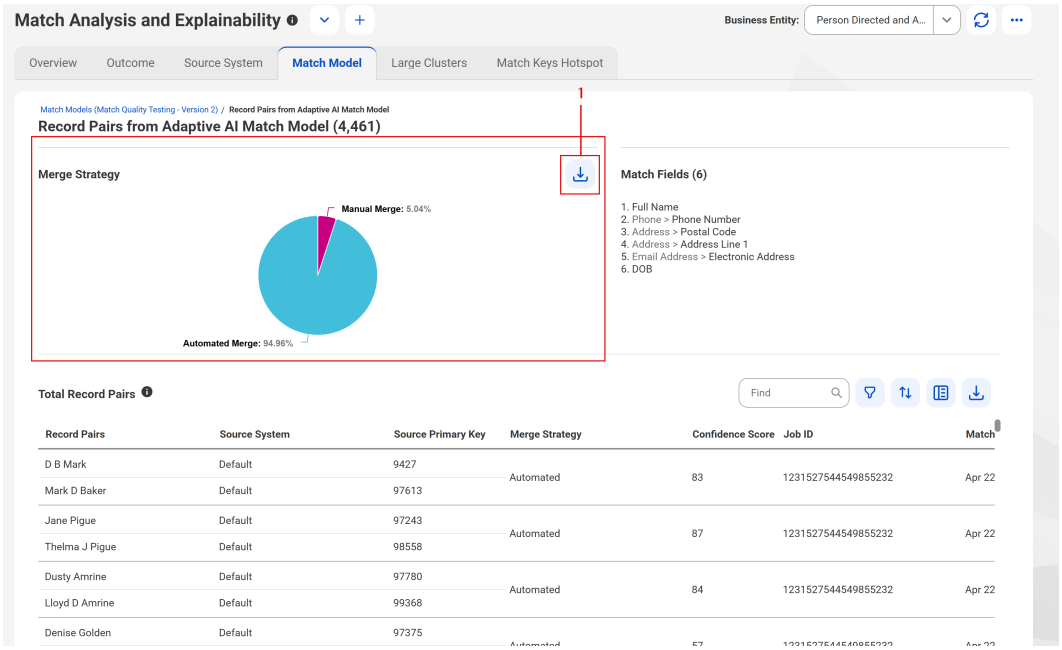

1. Export Data

The following table describes the user interface element that you can use in the Merge Strategy section:

User Interface Elements	Description
Export Data	Exports details, such as the number and percentage of record pairs generated based on each merge strategy to a CSV file.

Match fields

An Adaptive AI match model uses match fields in the training process. The Match Fields section shows the match fields that were used in training the Adaptive AI match model.

The following image displays the Match Fields section in the Record Pairs from Adaptive AI Match Model page:

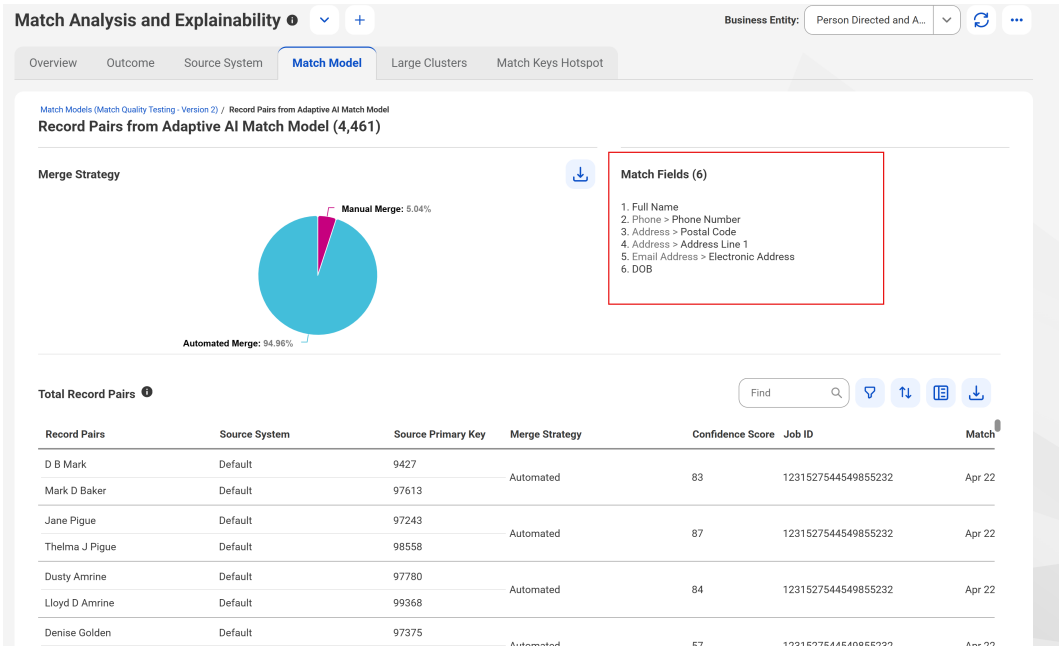

Total record pairs

The Total Record Pairs section displays record pairs predicted as matches by the Adaptive AI match model.

The following image displays the total record pairs from the Adaptive AI match model:

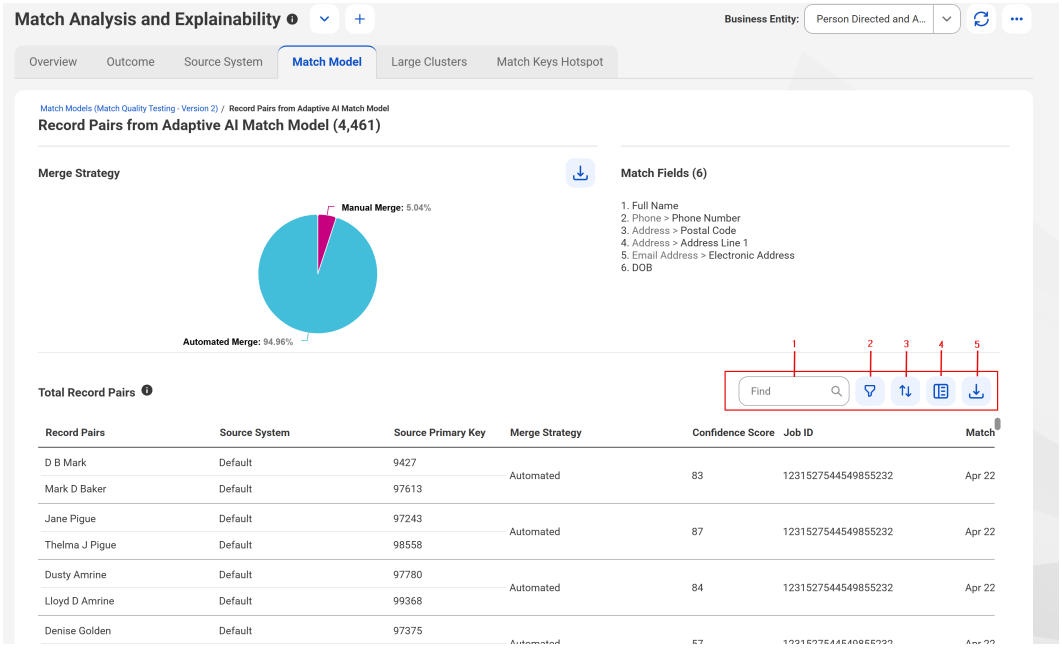

The following table describes the user interface elements that you can use in the Total Record Pairs section:

User Interface Elements	Description
Find	Search the record pairs based on the column values.
Filter	Filter record pairs based on source systems, confidence score, and record pair creation date.
Sort	Sort the record pairs in ascending or descending order based on a selected column name.
Show Additional Fields	Displays the additional details of a selected record pair in the Record Pair Details section.
Export Data	Export record pair details to a CSV file.

The following table describes the record pair details that the Total Record Pairs table displays:

Record Pair Details	Description
Record	The display names of records in the record pairs.
Source System	Source system associated with the record pairs.
Source Primary Key	Unique identifier of the source record.
Confidence Score	Score that indicates how similar the record pairs are.
Job ID	Unique identifier of the job instance that used the Adaptive AI match model to match record pairs.
Record Pair Creation Date	Date when the record pairs were matched.
Match Fields	Business entity fields of the source records based on which the record pairs are matched.

Record pair details

The Record Pair Details section displays additional details of a record pair in the Total Record Pairs table. To view additional details, select a record pair in the table.

The following image displays the additional details of a record pair in the Total Record Pairs section:

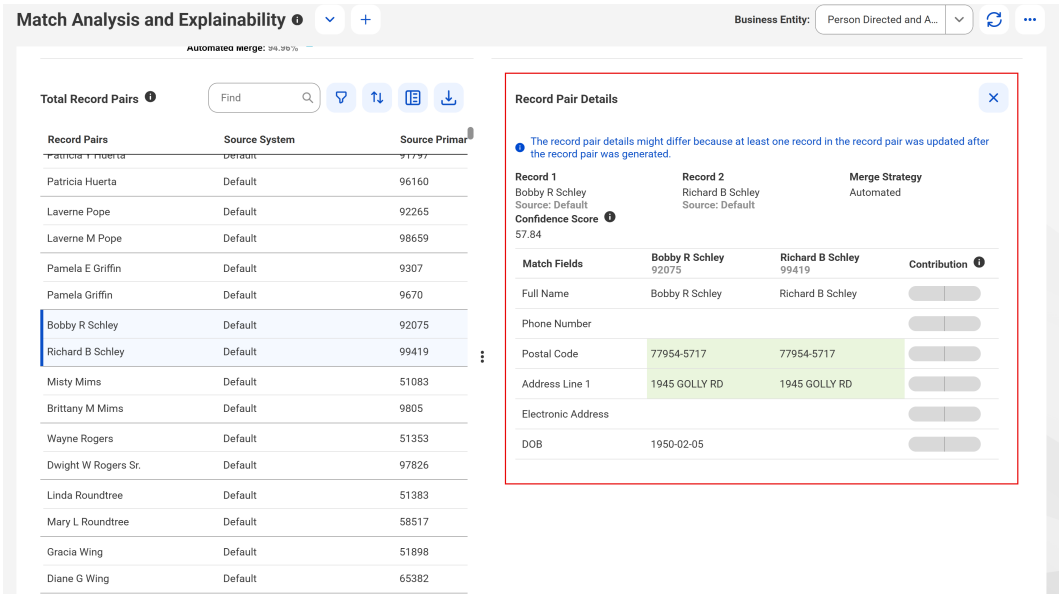

The following table describes the additional details that the Record Pairs Details section displays:

Record Pair Details	Description
Record 1	Display name of the first source record in the selected record pair.
Record 2	Display name of the second source record in the selected record pair.
Merge Strategy	Type of merge strategy to use during the merge process. The values are `Manual` and `Automated`.
Confidence Score	Score that indicates how similar the record pairs are.
Contribution	Score that indicates how each match field influences prediction outcomes. Positive score indicates support for matches and negative score indicates support for non-matches.
Match Fields	Name of the business entity fields that the Directed AI match rule uses for matching.

Match Keys Hotspot tab

Use the Match Keys Hotspot tab to identify hotspots in the data by analyzing the distribution of match keys generated for each field used in the candidate selection criteria of match models.

You can identify hotspots with a high concentration of similar match keys. When the match process uses these match keys to match records, it might result in overmatching. After you identify the hotspots, you can review the source records that contain these keys and then fine-tune the candidate selection criteria to prevent overmatching.

The bar chart displays the first five characters of each match key. You can drill down to view the sixth, seventh, and eighth characters of each key to analyze the hotspots better.

The following image shows the Match Keys Hotspot tab of the Match Analysis and Explainability dashboard:

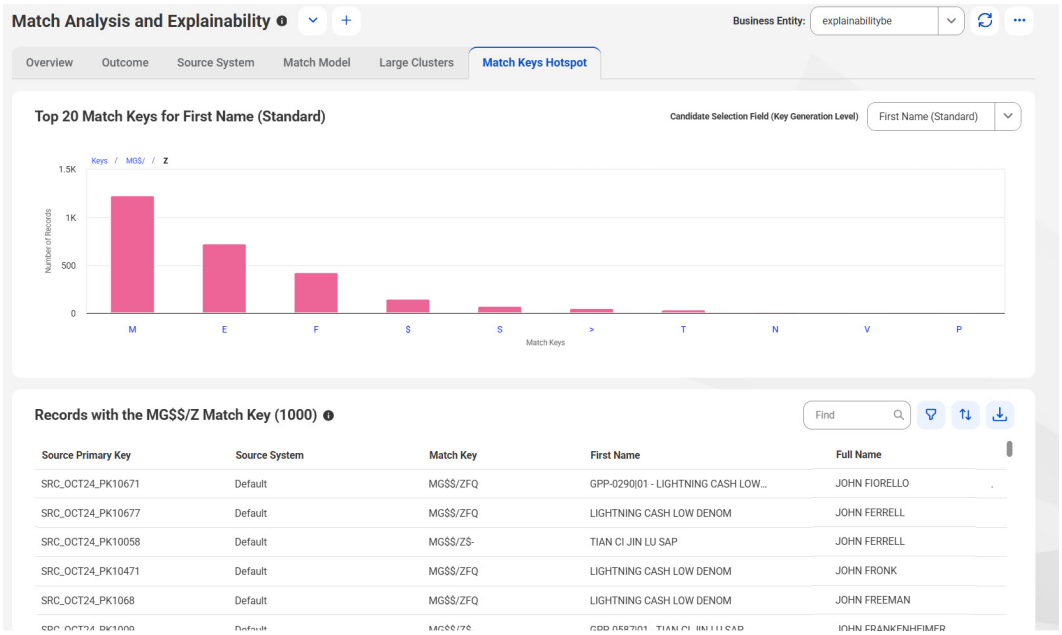

The Match Keys Hotspot tab consists of the following sections:

- Top 20 Match Keys
- Records

Top 20 Match Keys

The Top 20 Match Keys section displays the top 20 match keys generated for each field used in the candidate selection criteria of match models in a bar chart. You can select the match field from the Candidate Selection Field (Key Generation Level) list.

You can also view the number of records that contain the first five characters of each match key. To analyze the hotspots better, you can drill down a match key to view the sixth, seventh and eighth characters of the match key.

The following image shows the Top 20 Match Keys section for the Full Name field with the standard key generation level:

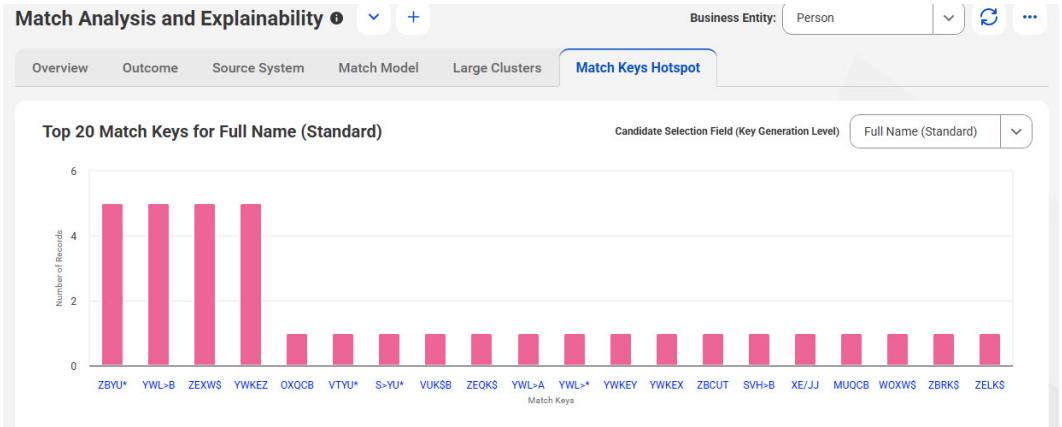

Records

The Records section displays the source records that contain the selected match key.

When multiple records contain the same match key, the match process might consider all of them as matches, which can lead to overmatching. You can review these source records and then fine-tune the candidate selection criteria to prevent overmatching.

The following image displays the source records in the Records section for the selected match key:

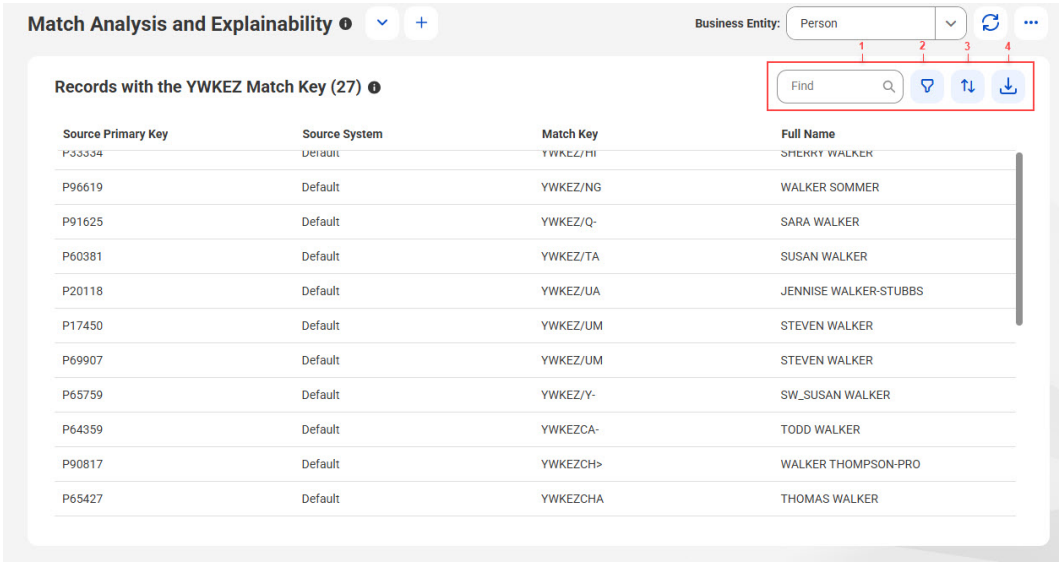

1. Find
2. Filter
3. Sort
4. Export

The following table describes the details of the source records that contain the selected match key:

Record Details	Description
Source Primary Key	Unique identifier of the record.
Source System	Source system associated with the record.
Match Key	Eight characters of match keys for source records.
<Field>	Field that the candidate selection criteria uses to generate match keys.
Filter Fields	Fields that are selected as filters during the candidate selection criteria.

Large Clusters tab

Use the Large Clusters tab to identify and analyze large clusters of records that are formed during the match process. The match process identifies record pairs that are related to each other, for example, record pairs AB, BC, and AC, and groups them into a single group of related records.

If large number of records match with each other, then large clusters of records are formed. For example, consider Organizations A with 5000 employees If you configure records to match based on the organization name, phone number, and address, all the employee records of the Organization A match with each other,

forming a large cluster with 5000 records. During the merge process, all record pairs in these clusters merge to form a single master record. Consequently, the merge process might create a master record for Organization A with 5000 source records.

You can use the Large Clusters tab to identify these large clusters and then fine-tune the match model configuration to prevent their formation because unmerging these source records is an expensive process.

The following image shows the Large Clusters tab of the Match Analysis and Explainability dashboard:

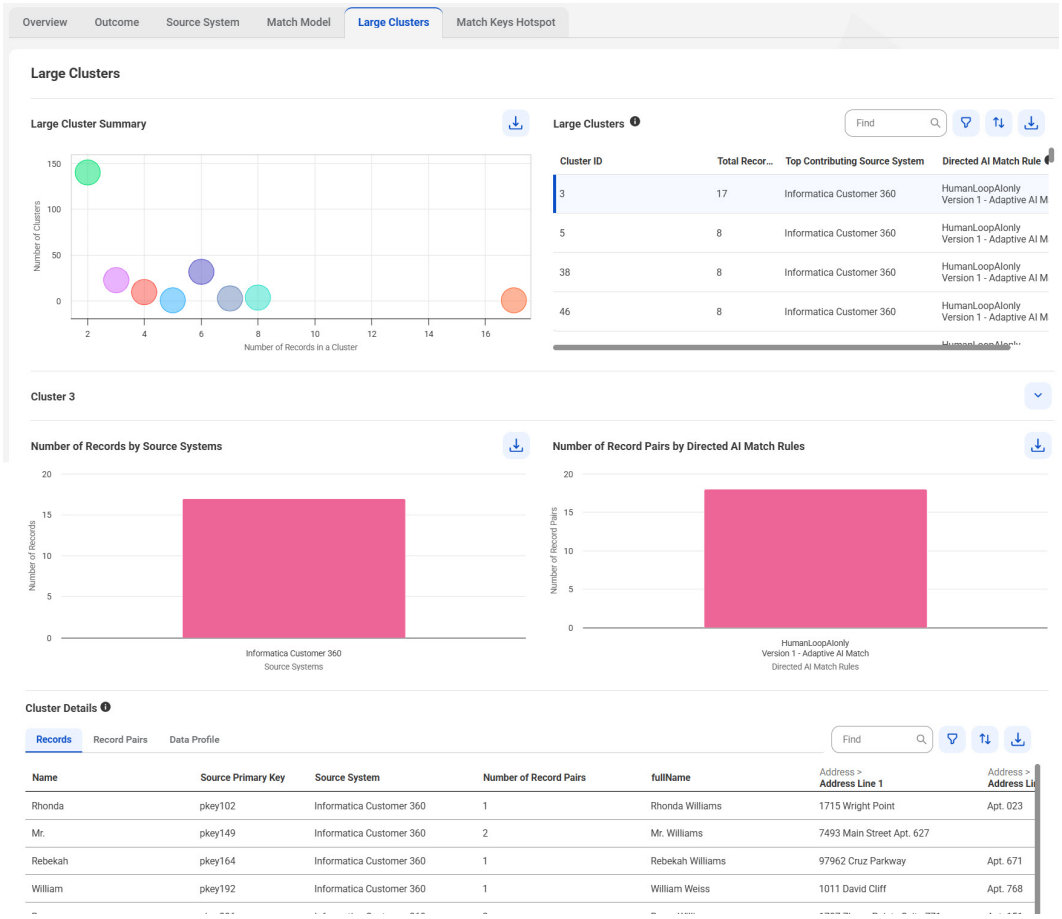

The Large Clusters tab consists of the following sections:

- Large Cluster Summary
- Large Clusters
- Number of Records by Source Systems
- Number of Record Pairs by Directed AI Match Rules
- Cluster Details

Large Cluster Summary

The Large Cluster Summary section displays a summary of large clusters formed by the match process along with the number of records within each cluster in a bubble chart.

You can analyze these clusters and identify the ones that contain the most number of records. The clusters are represented as bubbles in the chart. Each bubble uses a specific color to represent the number of clusters in it. For example, green-colored bubbles in the chart might represent a single cluster, whereas pink-colored bubbles might represent two clusters.

The following image shows a Large Cluster Summary section that contains a bubble chart with record clusters in different colors:

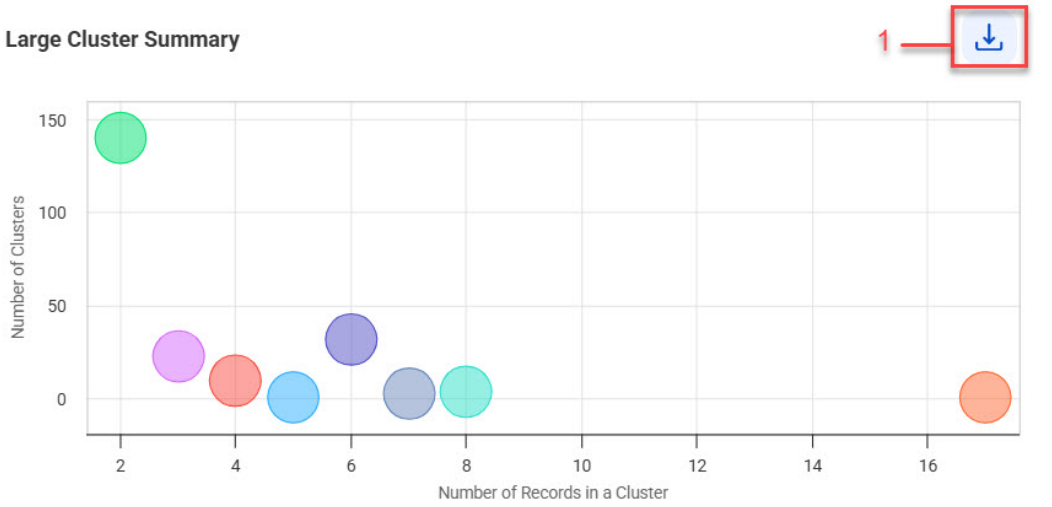

1. Export Data

The following table describes the user interface elements that you can use in the Large Cluster Summary section:

User Interface Elements	Description
Export Data	Exports large clusters summary to a CSV file.

Large Clusters

The Large Clusters section displays additional details of all the clusters that were formed by the match process in a tabular format.

You can view the additional details, such as unique identifiers assigned to the clusters, total number of source records, top source systems that contributed to the source records in the clusters, and Directed AI match rules that generated the most record pairs. You can view up to 1000 large clusters in descending order of size. You can also select a cluster in the table to view its details, such as number of records contributed by source systems, number of record pairs generated by Directed AI match rules, records and record pairs in the cluster, and data profiling details of match fields.

The following image shows the additional details of large clusters formed during the match process in the Large Clusters section:

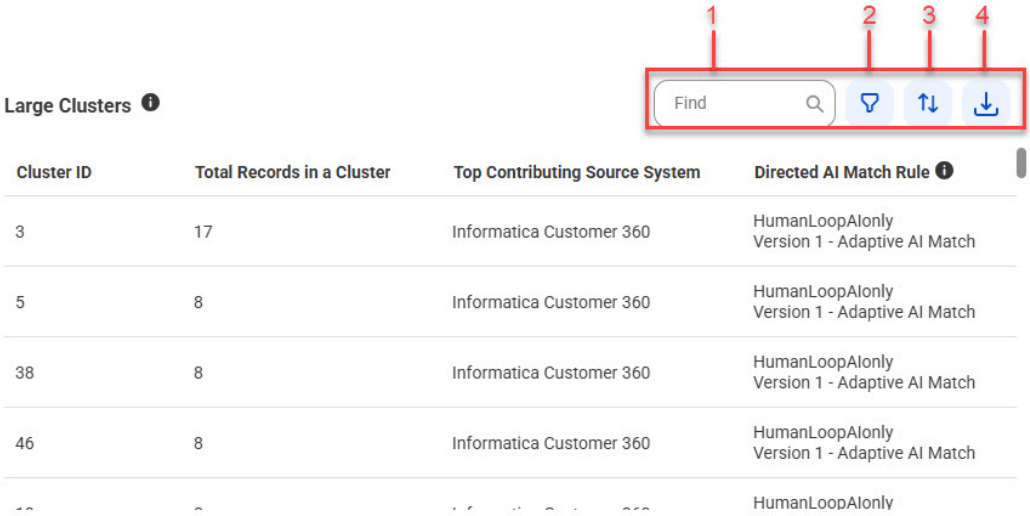

1. Find
2. Filter
3. Sort
4. Export Data

The following table describes the user interface elements that you can use in the Large Clusters section:

User Interface Elements	Description
Find	Search the clusters based on the column values.
Filter	Filter based on the total records in a cluster, top contributing source system, and Directed AI match rule.
Sort	Sort the cluster details in ascending or descending order based on a selected column name.
Export Data	Export cluster details to a CSV file.

The following table describes the details of large clusters formed during the match process in the Large Clusters section:

Cluster Details	Description
Cluster ID	Unique identifier of the cluster.
Total Records in a Cluster	Total number of source records in a cluster
Top Contributing Source System	Top source systems that contributed the most source records to the cluster.
Directed AI Match Rule	Directed AI match rules that generated the most record pairs in the cluster.

Number of Records by Source Systems

The Number of Records by Source Systems section displays a bar chart that represents the total number of records contributed by each source system in a cluster. When you select a cluster in the Large Cluster

section, the Number of Records by Source Systems section filters the source systems that contributed to the records from the selected cluster.

The following image shows the Number of Records by Source System section:

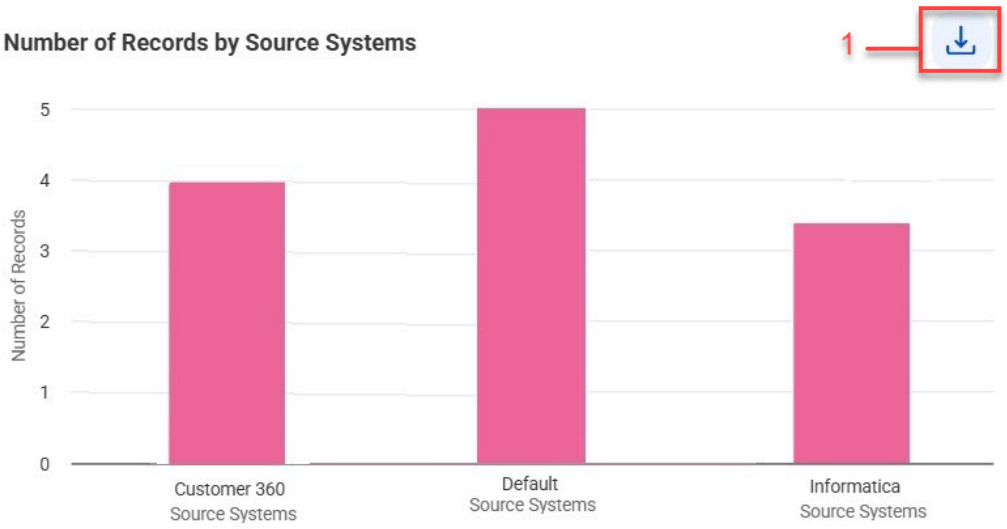

1. Export Data

The following table describes the user interface elements that you can use in the Number of Records by Source Systems section:

User Interface Elements	Description
Export Data	Exports the total number of records contributed by the source systems to a CSV file.

Number of Record Pairs by Directed AI Match Rules

The Number of Record Pairs by Directed AI Match Rules section displays the Directed AI match rules that generated the most record pairs in a cluster. When you select a cluster in the Large Cluster section, the Number of Record Pairs by Directed AI Match Rules section filters the Directed AI match rules that generated the most record pairs from the selected cluster.

The following image shows the Number of Record Pairs by Directed AI Match Rules section:

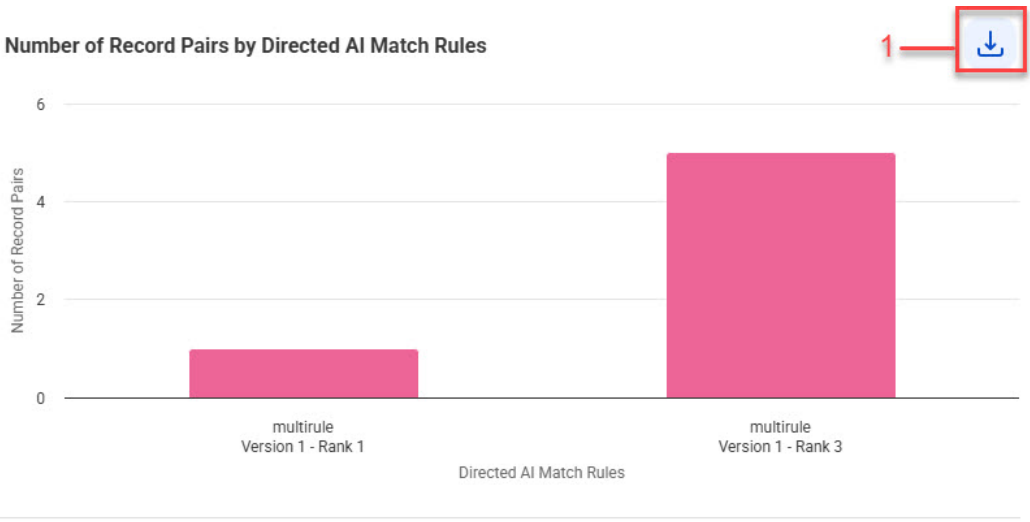

1. Export Data

The following table describes the user interface elements that you can use in the Number of Record Pairs by Directed AI Match Rules section:

User Interface Elements	Description
Export Data	Exports the total number of record pairs generated by the Directed AI match rules to a CSV file.

Cluster Details

The Cluster Details section displays details about all the source records, record pairs, and match field statistics of a cluster. You can view these details in Records, Record Pairs and Data profile sections.

You can view up to 1000 source records and record pairs. To view the cluster details, select a cluster in the Large Cluster section.

Records

The Records section displays the total number of source records in a cluster.

You can also view source record details, such as display name, source primary key, source system, number of record pairs that a source record formed, and the match fields used in a record. When you select a cluster in the Large Cluster section, the Records section filters the records from the selected cluster.

The following image shows the Records section that displays the source record details of a cluster:

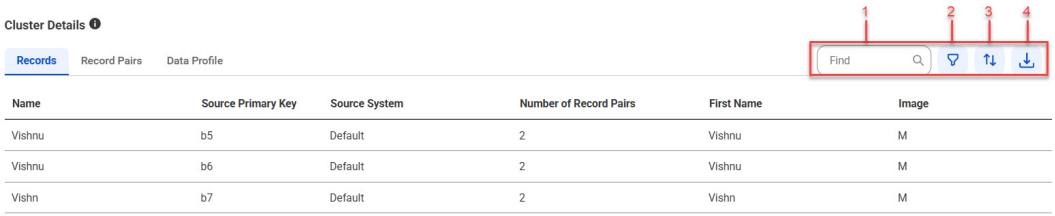

1. Find
2. Filter
3. Sort
4. Export Data

The following table describes the user interface elements that you can use in the Records section:

User Interface Elements	Description
Find	Search the source records based on the column values.
Filter	Filter based on source system and source record name.
Sort	Sort the source records in ascending or descending order based on a selected column name.
Export Data	Export source record details to a CSV file.

The following table describes the details of the source records in a cluster:

Record Details	Description
Name	Display name of source records in the cluster.
Source Primary Key	Unique identifier of the source record.
Source System	Source system associated with the source record.
Number of Record Pairs	Total number of record pairs that the source record formed by matching with other records.
Match Fields	Business entity fields of the source records based on which the record pairs are matched.

Record Pairs

The Record Pairs section displays the details of record pairs associated with a cluster

When you select a cluster in the Large Cluster section, the Record Pairs section filters the record pairs from the selected cluster.

The following image displays record pairs of a cluster in the Record Pairs section:

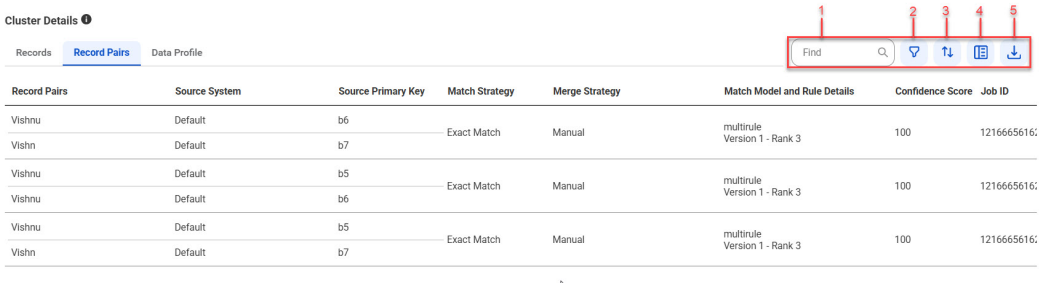

1. Find
2. Filter
3. Sort
4. Show Additional Details
5. Export Data

The following table describes the user interface elements that you can use in the Record Pairs section:

User Interface Elements	Description
Find	Search the record pairs based on the column values.
Filter	Filter record pairs based on column values, such as source systems, match strategy, merge strategy, population, match model and rule details, confidence score, and matched date.
Sort	Sort the record pair details in ascending or descending order based on a selected column name.
Show Additional Details	Displays the details of a selected record pair in the Record Pair Details section.
Export Data	Export record pair details to a CSV file.

The following table describes the columns in the Record Pairs section:

Record Pair Property	Description
Record Pairs	The display name of the source records in the record pairs.
Source System	Source system associated with the source record.
Source Primary Key	Unique identifier of the source record.
Match Strategy	Type of match strategy that identified the record pair, such as exact, fuzzy, or Adaptive AI.
Merge Strategy	Type of merge strategy to use during the merge process. The values are `Manual` and `Automated`.
Match Model and Rule Details	Name of the match model and the Directed AI match rule that identified the record pair.
Confidence Score	A score that indicates how similar the record pairs are.

Record Pair Property	Description
Job ID	Unique identifier of the job instance that used the Directed AI match rule to match record pairs.
Matched Date	Date when the record pairs were matched.
Population	Population used in the match model configuration.
Match Fields	Business entity fields of the source records based on which the record pairs are matched.

Record pair details

You can view details of a record pair, such as the fields that matched to form the record pair, match status for exact matches, and confidence score of the record pair. To view these details, select a record pair and click **Show Additional Details**.

The following image shows the details of a selected record pair in the Record Pairs section:

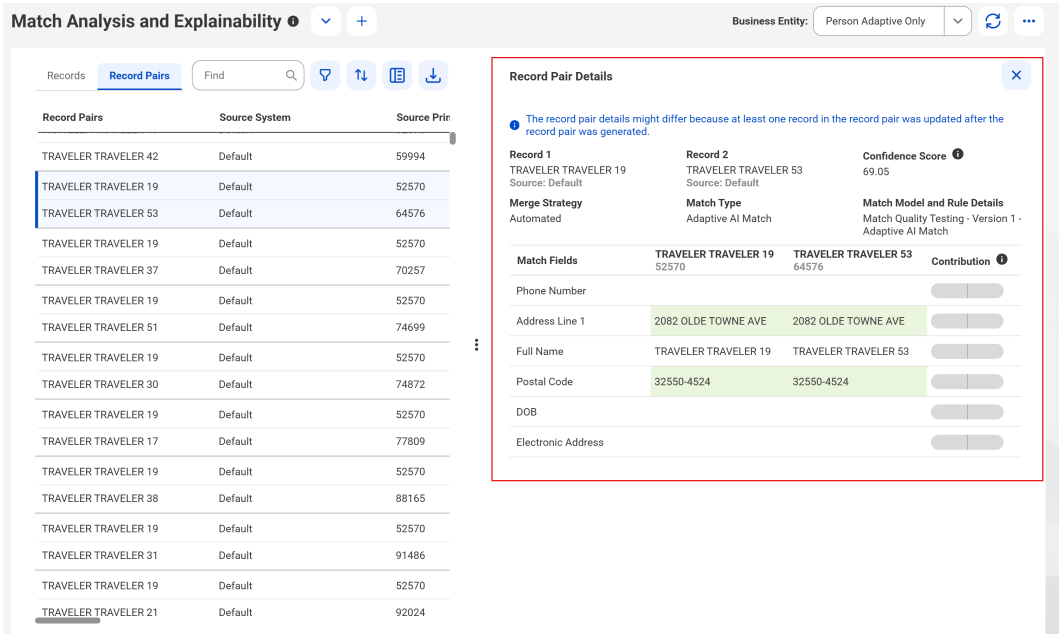

The following table describes the record pair details of the selected record pair:

Record Pair Details	Description
Record 1	Display name of the first source record in the selected record pair.
Record 2	Display name of the second source record in the selected record pair.
Merge Strategy	Type of merge strategy to use during the merge process. The values are `Manual` and `Automated`.
Match Strategy	Type of match strategy that the Directed AI match rule uses, such as exact or fuzzy.

Record Pair Details	Description
Confidence Score	Score that indicates how similar the record pairs are.
Contribution	Score that indicates how each match field influences prediction outcomes. Positive score indicates support for matches and negative score indicates support for non-matches.
Match Model and Rule Details	Name of the match model and the Directed AI match rule that the job used.
Match Fields	Name of the business entity fields that the Directed AI match rule uses for matching.
Field Match Score	The score assigned to match fields within a record pair based on the similarity of their values. The higher the score, the more similar the values are. Applicable to Directed AI match rules with fuzzy match strategy.
Match Weight	Indicates the weight or importance of a match field within a record pair. Match weight is a decimal number that varies based on the field type configured in the match model. Fields with higher match weight are given greater importance during the match process. For example, if the field type selected in the match model is Person_Name, the match process assigns greater importance to the Full Name field than to the Address Line 1 field.
Match Result	Displays the weighted match score for fuzzy match fields, and displays **Match** as a status for exact match fields. The weighted match score is calculated by multiplying the match weight by the field match score for each match field. For example, if the match weight for the Full Name field is 0.3 and the field match score is 96, the weighted match score would be 0.3 × 96 = 28. If the overall match score for this record pair is 100, then 28 is the weighted match score contributed by the Full Name field.

Data Profile

You can use the Data Profile section to analyze and understand the uniqueness and completeness of record data.

For example, if you match records based on the Organization Name field, then all employee records of an organization match with each other to form a large cluster of records. The Data Profile section displays the Organization Name field with higher non-distinct values because all the records matched solely on the field value of the Organization Name field.

After you analyze how distinct or non-distinct these field values are, you can then fine-tune the match model configuration to enhance its effectiveness. You can analyze statistics, such as the distribution of null, distinct and non-distinct values of match fields in the Data Profile section.

The following image shows the match fields statistics in the Data Profile section:

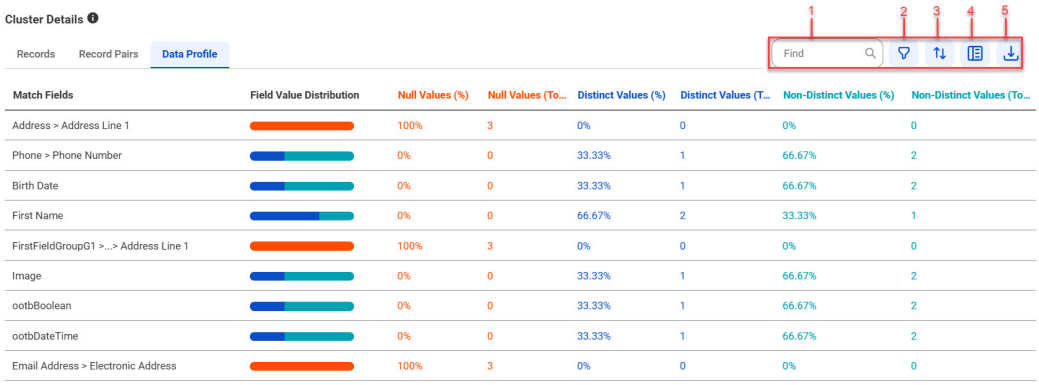

1. Find
2. Filter
3. Sort
4. Show Additional Details
5. Export Data

The following table describes the user interface elements that you can use in the Data Profile section:

User Interface Elements	Description
Find	Search the match fields based on the column values.
Filter	Filter the match fields based on the column values.
Sort	Sort the match fields in ascending or descending order based on the selected column name.
Show Additional Details	Displays the top 10 field values of a selected match field in the Top 10 Values by Match Count section.
Export Data	Export data profile statistics to a CSV file.

The following table describes the statistics you can view for each match field:

Match Field Statistics	Description
Match Fields	Business entity fields of the source records based on which the record pairs are matched.
Field Value Distribution	Displays the distribution of null, distinct and non-distinct values of a match field in a horizontal bar.
Null Values (%)	Percentage of fields with null values in the match field.
Null Values (Total)	Total number null values in the match field.
Distinct Values (%)	Percentage of fields with distinct values in the match field.
Distinct Values (Total)	Total number of distinct values in the match field.

Match Field Statistics	Description
Non-Distinct Values (%)	Percentage of fields with non-distinct values in the match field.
Non-Distinct Values (Total)	Total number of distinct values in the match field.

Top 10 Values by Match Count

The Top 10 Values by Match Count section displays the top 10 field values that matched the most number of records in a horizontal bar chart.

For example, if you match records based on the Organization Name field, then the top 10 field values of the Organization Name field that matched the most number of records are displayed in the chart. You can select a match field in the Data Profile section to view its top 10 field values.

The following image shows the top 10 field values of a match field in the Top 10 Values by Match Count section:

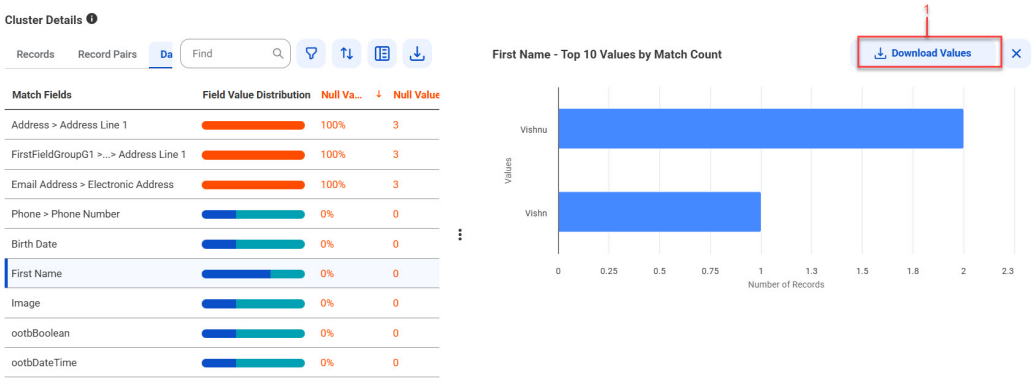

1. Download Values

The following table describes the user interface elements that you can use in the Top 10 Values by Match Count section:

User Interface Elements	Description
Download Values	Download the top 10 field values of the match field to a CSV file.

Usage Statistics dashboard

The Usage Statistics dashboard displays the usage statistics and key job metrics of MDM SaaS, such as ingress, egress, match, and merge jobs. You can use the statistics to assess the health and performance of your organization.

Use the Usage Statistics dashboard to view the usage statistics of MDM SaaS and the metrics for jobs, such as ingress, egress, match, and merge jobs.

You can view key job metrics and usage statistics irrespective of your user role and privileges.

The following table describes the statistics that can appear on the Usage Statistics dashboard:

Statistics	Description
Ingress Job	Displays the key metrics of the ingress job. You can use the metrics to determine the number of records that were imported from source systems. For more information about viewing ingress job metrics, see *Ingress job metrics* in the Business 360 Console help.
Egress Job	Displays the key metrics of the egress job. You can use the metrics to determine the number of records that were exported from the Business 360 data store to other external data sources. For more information about viewing egress job metrics, see *Egress job metrics* in the Business 360 Console help.
Match Job	Displays the key metrics of the match job. You can use the metrics to decide whether to modify the match model configuration. For more information about viewing match job metrics, see *Match job metrics* in the Business 360 Console help.
Merge Job	Displays the key metrics of the merge job. You can use the metrics to determine the number of record pairs and record pair groups that were created by the job. For more information about viewing merge job metrics, see *Merge job metrics* in the Business 360 Console help.
Usage Statistics	Displays an overview of MDM SaaS usage statistics. For more information about viewing usage statistics of MDM SaaS, see *Monitor usage statistics for MDM SaaS* in the Business 360 Console help. **Note:** To view the updated usage statistics on the dashboard, contact your administrator.

Creating custom dashboards

You can create dashboards to visualize charts. You can create custom dashboards to visualize charts and add predefined dashboards to monitor MDM SaaS. You add a dashboard to the **Home** page.

After you create a custom dashboard, you can add charts as widgets to the dashboard layout. You must add at least one widget to the dashboard layout for the charts to appear on the **Home** page.

You can also add a predefined dashboard to the **Home** page to view the usage statistics of MDM SaaS and the metrics for the following jobs:

- Ingress
- Egress
- Match
- Merge

Note: After you add a predefined dashboard to view the desired statistics, you can't add another predefined dashboard to view the same statistics.

If you have multiple dashboards, the first dashboard tab appears by default when you land on the **Home** page.

Creating a custom dashboard

When you log in for the first time, the **Home** page displays an empty dashboard. You can create a dashboard and add charts as widgets.

1. Perform one of the following tasks:
   - On the **Home** page, click **New Dashboard**.
   - Click **New** > **Reports and Dashboards** > **Dashboards** > **Create**.

   The **New Dashboard** dialog box appears.
2. Enter a dashboard name and a short description for the dashboard.

   You can enter up to 256 characters for the description.
3. Select a dashboard layout.

   The following table describes the predefined layouts that you can select for the dashboard:

Layout	Description
Default Grid	A predefined dashboard layout that contains 1 big grid and 10 standard grids.
Grid 1 (4x3)	A predefined dashboard layout that contains 4 rows of 3 grids with a total of 12 grids.
Grid 2 (4x2)	A predefined dashboard layout that contains 4 rows of 2 grids with a total of 8 grids.
Grid 3 (4x2)	A predefined dashboard layout that contains 3 rows of 2 grids with a total of 6 grids.
Grid 4 (2x3) and (1x2)	A predefined dashboard layout that contains 2 rows of 3 grids and 1 row of 2 grids.
Grid 5 (8 Grids)	A predefined dashboard layout that contains 2 long grids, 2 wide grids, and 4 standard grids.
Grid 6 (6 Grids)	A predefined dashboard layout that contains 2 big grids and 4 standard grids.

4. Click **Create**.

   After you create a dashboard, add widgets to the dashboard to display charts. For more information about adding widgets, see "Adding a widget" on page 143.

   Note: To add another dashboard, you can click the **New Dashboard** tab that appears after you create a dashboard, and follow the steps 1 through 4. You can add as many dashboards as you want.

Limits on custom dashboards

An organization can contain up to 100 custom dashboards.

To create a custom dashboard after you reach this limit, either delete a custom dashboard that you no longer need or contact your administrator.

Adding a predefined dashboard

You can add predefined dashboards to the **Home** page to display summary information about your data, such as the key job metrics and usage statistics of MDM SaaS and match data.

1. On the **Home** page, click the **Add** icon.
2. Click **Add Existing Dashboard**.

3. On the **Add Existing Dashboard** dialog box, select the **Predefined Dashboards** tab.
4. Select the predefined dashboard that you want to add to the **Home** page.
5. Click **Add**.

Sharing dashboards

You can share a dashboard created by you with other users in your organization. When you share a dashboard, other users can view the dashboard along with its widgets in Supplier 360 SaaS.

If you have the privilege to manage shared objects, you can edit or delete a shared dashboard and also update its sharing properties.

Sharing a dashboard

You can share a dashboard that you create with other users in the organization.

1. From the **Reports and Dashboards** page, click the **Dashboards** tab.
2. On the **My Dashboards** tab, select the dashboard that you want to share.
3. On the dashboard, click the **Share** icon.
4. In the **Share Dashboard** dialog box, select one of the following sharing options:
   - No. Only you can view and edit the dashboard.
   - Yes, share with everyone. The dashboard is shared with everyone, but only you can edit the dashboard.
5. If you choose **Yes, share with everyone**, select one of the following sharing options:
   - No, only share. The dashboard is shared but isn't added to everyone's Home page.
   - Yes, add to everyone's Home page. The dashboard is shared and is added to everyone's Home page.
   - No, remove from everyone's Home page. The dashboard is shared with everyone but removed from everyone's Home page.
6. Click **Save**.

Notifications on shared dashboards

You can get notifications on shared dashboards that are added to your Home page.

MDM SaaS generates notifications for the following actions performed on a shared dashboard:

- When a user edits the shared dashboard.
- When a user deletes the shared dashboard.
- When a user updates a shared dashboard to private.

Viewing dashboards

The **Dashboards** tab on the **Reports and Dashboards** page displays a list of custom dashboards that you create and the dashboards shared with you by other users in your organization.

You can view the list of dashboards created by you on the **My Dashboards** tab and the dashboards that are shared with you by other users in your organization on the **Shared Dashboards** tab. You can sort and filter the dashboards based on the field and column names respectively.

The following image shows a sample **My Dashboards** tab:

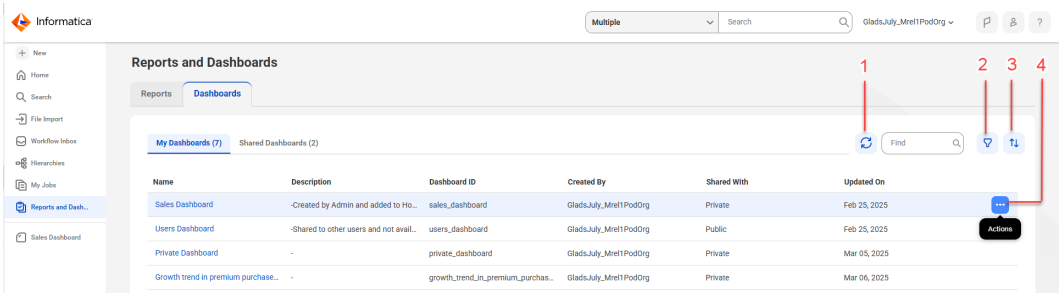

1. Refresh
2. Filter
3. Sort
4. Actions

The following table lists the different user interface elements that you can find on the **My Dashboards** tab:

User Interface Elements	Description
Refresh	Refreshes the **Dashboards** page. The newly created custom dashboards appear only after you refresh the page.
Filter	Lists the names of the columns based on which you can filter dashboards. You can select the fields based on which you want to filter the dashboards.
Sort	Displays dashboards based on the selected field in ascending or descending order.
Actions	Lists the following actions that you can perform on the dashboard: - Share. Shares a dashboard with other users in your organization. - Add to Home. Adds a dashboard to the **Home** page. - Edit. Opens a dashboard to edit it. - Delete. Deletes a dashboard.

To view a dashboard created by you or a shared dashboard, click the dashboard from the **Dashboards** tab. The dashboard opens on the dashboard page. Based on your user role permissions, you can view the chart details, and edit, or remove widgets on the dashboard.

Viewing chart details

From the dashboard, you can see an overview of the source data used for creating the charts. The source data comes from the reports that display information about your records. The overview includes the report data in tabular format, report details, schedule details, and the chart associated with the report.

1. On the **Reports and Dashboards** page, click the **Dashboards** tab.

2. Click the dashboard you want to view from the **My Dashboards** or the **Shared Dashboards** tab.

   The dashboard opens on the dashboard page.

3. To view the report details of a widget on the dashboard, click **View** on the widget.

   The report details page appears. You can see an overview of the report data in tabular format, report details, schedule details, and the chart associated with the report.

Viewing predefined dashboards

You can view predefined dashboards on the Home page to monitor MDM SaaS and view match data.

If the predefined dashboards aren't visible on the **Home** page, you can add the dashboard to the **Home** page. For more information, see "Adding a predefined dashboard" on page 139.

To view the Match Analysis and Explainablity predefined dashboards in your business application, contact your administrator.

Editing dashboards

After you create custom dashboards, you can edit the widgets added to these dashboards. You can't edit the predefined dashboard.

You can delete the custom and predefined dashboards that you no longer need. To delete custom dashboards, see "Deleting dashboards" on page 143. You can select and delete the predefined dashboard that you no longer need.

Editing dashboards

You can edit the dashboards that you create to add, edit, or remove the widgets associated with them.

1. On the **Reports and Dashboards** page, click the **Dashboards** tab.
2. Click the dashboard you want to edit from the **My Dashboards** tab.

   The dashboard opens on the dashboard page.

3. To edit the dashboard, click the **Edit** icon.

   The dashboard layout appears in edit mode.

4. To edit the dashboard properties, click **Edit Properties**.
5. On the **Edit Properties** dialog box, you can edit the properties, such as name, description and layout of the dashboard.
6. Click **Update**.
7. Modify the widgets.
   - For adding a widget, see "Adding a widget" on page 143.
   - For editing a widget, see "Editing a widget" on page 144.
   - For removing a widget, see "Removing a widget" on page 145.
8. Click **Save**.

Deleting dashboards

You can delete the dashboards that you create from the **Home** page.

When you delete a shared dashboard that you created, the dashboard is removed from your **Home** page. However, for other users who have the dashboard on their **Home** page, the dashboard remains listed with a message indicating that it is deleted. The deleted dashboard remains visible on the **Home** page, but without any visualizations.

1. On the **Reports and Dashboards** page, click the **Dashboards** tab.
2. Perform one of the following tasks:
   - Click **Actions** > **Delete** from the selected dashboard that you want to delete.
   - To delete the dashboard from the dashboard page, perform the following tasks:
     1. Click the dashboard you want to view from the **My Dashboards** tab.
        The dashboard opens on the dashboard page.
     2. Click **Actions** > **Delete**.

   A confirmation dialog box appears.
3. Click **Delete**.

   The dashboard is deleted from the **Home** page.

Copying dashboards

You can copy a dashboard to create another dashboard.

1. On the **Reports and Dashboards** page, click the **Dashboards** tab.
2. Select the dashboard that you want to copy, and click **Actions** > **Copy**.
3. Specify a name for the dashboard, and click **Copy**.

   The dashboard layout appears in edit mode.
4. Update the widgets, and click **Save**.

Adding a widget

When you log in for the first time, the **Home** page displays an empty dashboard. You can edit the dashboard to add charts as widgets. You can select a report that you want the widget to display as a chart.

1. Perform one of the following tasks:
   - On the **Home** page, click **Edit Dashboard**.
   - To add a widget from the dashboard page, perform the following tasks:
     1. On the **Reports and Dashboards** page, click the **Dashboards** tab.
     2. Click the dashboard you want to edit from the **My Dashboards** tab.
     3. On the dashboard, click the **Edit** icon.

   The dashboard layout opens in the edit mode.

2. Click **Add Report**.

   The **Add Report** dialog box appears.
3. Enter the name of the report to add.

   The reports with matching names appear in a list.

   Note: To view all the available reports, type * in the search box.
4. Select a report from the list.

   The chart associated with the selected report appears in the preview panel along with the last updated time and estimated next run time of the associated report.
5. Click **Add**.

   The chart appears on the widget.
6. To add more widgets, repeat steps 2 through 5.
7. Click **Save**.

Editing a widget

After you add a widget to the dashboard, you can edit the widget to change the report.

1. Perform one of the following tasks:
   - On the **Home** page, click **Edit Dashboard**.
   - To add a widget from the dashboard page, perform the following tasks:
     1. On the **Reports and Dashboards** page, click the **Dashboards** tab.
     2. Click the dashboard you want to edit from the **My Dashboards** tab.
     3. On the dashboard, click the **Edit** icon.

   The dashboard layout opens in the edit mode.
2. Select the widget to edit.
3. Click **Actions** > **Change Report**.
4. On the **Add Report** dialog box, enter the name of the report to add.

   The reports with matching names appear in a list.
5. Select a report from the list.

   The chart associated with the selected report appears in the preview panel.
6. Click **Add**.

   The chart appears on the widget.
7. Click **Save**.

Removing a widget

You can remove a widget from the dashboard. When you remove a widget, the dashboard layout rearranges to show the remaining widgets on the dashboard.

1. Perform one of the following tasks:
   - On the **Home** page, click **Edit Dashboard**.
   - To add a widget from the dashboard page, perform the following tasks:
     1. On the **Reports and Dashboards** page, click the **Dashboards** tab.
     2. Click the dashboard you want to edit from the **My Dashboards** tab.
     3. On the dashboard, click the **Edit** icon.

   The dashboard layout opens in the edit mode.
2. On the widget that you plan to remove, click **Actions** > **Reset**.

   The widget is removed from the dashboard layout.
3. Click **Save**.

Editing a custom chart

You can edit custom charts that you add to the dashboard. You can modify the properties of the report data and the look and feel of the charts. After you edit the custom charts, you must publish the reports for the changes to take effect.However, you cannot edit the predefined charts on the dashboard.

1. Perform one of the following tasks:
   - On the **Home** page, click **Edit Dashboard**.
   - To add a widget from the dashboard page, perform the following tasks:
     1. On the **Reports and Dashboards** page, click the **Dashboards** tab.
     2. Click the dashboard you want to edit from the **My Dashboards** tab.
     3. On the dashboard, click the **Edit** icon.

   The dashboard layout opens in the edit mode.
2. Select the widget to edit the custom chart.
3. Click **Edit**.

   The edit report page appears.
4. Modify the configuration of the report.
5. Click **Apply**.

   A preview of the report data appears.
6. Click **Chart**.

   The **Templates** pane appears.
7. Select a new chart template.
8. To save the report, click **Save**.
9. Optionally, edit and publish the report.

   For more information about editing and publishing a custom report, see *Manage Reports*.

10. Click **Close**.
11. To save the dashboard, click **Save**.

CHAPTER 5

Manage reports

A report is a collection of data that is acquired from the master data. Use reports to gain meaningful insights into your business data and business outcomes. In Supplier 360 SaaS, you can use reports to display information about your records.

You can create custom reports and view the report data instantly without publishing them. The report data appears in the report table based on the dimensions and measures. You can create different types of custom reports based on the data that you use. You can't create reports based on dynamic fields.

After you create a report, you can visually represent the report data as charts. You can then add the charts to widgets on the **Home** page dashboard. You can also drill down into the custom charts associated with their drill-down reports.

You can create merge history activity reports that display information about the number of source records merged to form master records.

Custom report types

You can create different types of custom reports. The reports are categorized based on the data that you use.

You can use the following report types:

- Reports based on master records. Use the master records that belong to a business entity as the report data.
- Reports based on record metadata. Use the metadata of master records as the report data.

To create meaningful custom reports, configure appropriate fields as reportable when you model a business entity. These fields appear as dimensions and measures when you create reports.

Dimensions are the fields that represent the qualitative or categorical values of a data set. For example, country or lifestyle segment. Measures are the fields that represent the quantitative values of a data set. For example, the average sales or profit count for a month.

You can also create custom reports based on master record fields that don’t contain any values.

Note: When you configure a custom report that can return more than 500 unique field values, you can view only the first 500 field values in the report table and chart.

For more information about configuring the fields in a business entity as reportable, see *Configure search properties for a field* in the *Business 360 Console* help.

Reports based on master records

Custom reports based on active master records use the business entity fields to display report data. You can use these reports to derive meaningful insights about the master records of a business entity. After you configure the report and apply the changes, the report data appears in the report table and the associated chart.

You can view the report table and chart on the report details page. Additionally, the report details page displays the configured dimensions and measures as search results on the Data Set panel. For more information about Data Set panel, see "Data set in reports" on page 157.

Note: Custom reports based on master records don't include data from deleted records.

You can also create custom reports based on master record fields that don't contain any values.

Standard reports

Standard reports display report data based on the dimension and measures that you selected for the reports.

When you configure a standard report and apply the changes, the report data appears instantly on the report table. These reports can use a single dimension and multiple measures.

Drill-down reports

Drill-down reports use multiple dimensions to provide additional levels of detail. You can add up to three levels of dimensions to the report data. The field values in the report data appear based on the dimension levels.

For example, you can create a drill-down report to view the number of employees according to their gender in an organization based on their country, state, and city. When you configure the report, you can add the Country field as the first level of dimension followed by State and City fields in the subsequent levels. You can add the Gender field as a measure. The report data displays the number of employees according to their gender at the country level. You can drill down into the country data to view the number of employees at the state level and drill down further to view the number of employees at the city level.

You can drill down to view additional levels of details in the report table and chart. These reports display report data instantly without the need to schedule and publish them. When you configure a drill-down report and apply the changes, the report data appears instantly in the report table.

Before you configure the dimensions and measures for a drill-down report, consider the following guidelines:

- When you select a root field as a dimension in the first level, you can select only root fields in the subsequent levels. For example, if you select Gender field as a dimension in the first level, you can select only root fields, such as Marital Status and Revenue, in the subsequent levels. You can't select any fields in the field groups as dimensions in the second and third levels. Additionally, you can select only root fields in the measures list.
- When you select fields from the same field group as dimensions in all three levels, you can select root fields and fields within the selected field group as measures. For example, if you select Country, State, and City fields within the Postal Address field group as dimensions in all three levels, you can select root fields and fields within the Postal Address field group as measures.
- When you select fields from different field groups as dimensions in the first and second levels, you can't select the same field groups as dimensions in the third level. For example, if you select the Country field within Postal Address field group as a dimension in the first level and the Qualification field within the Education field group as a dimension in the second level, you can't select the fields in the Postal Address and Education field groups in the third level. You can select only the root fields in the third level. Additionally, you can select only root fields in the measures list.

Reports based on record metadata

To create custom reports based on record metadata, you can use the metadata of master records, such as the validation statuses of records or the merge history of source records. You can use these reports to understand the metadata associated with master records.

Records with validation errors

Custom reports that are based on records with validation errors display the validation statuses of master records in a business entity. For example, you can configure a report to view the number of records based on the types of validation errors. After you configure the report and apply the changes, the report data appears in the report table and the associated chart.

You can view the report table and chart on the report details page. Additionally, the report details page displays the configured dimensions and measures as search results on the Data Set panel. For more information about Data Set panel, see "Data set in reports" on page 157.

Merge history activity reports

The merge history activity reports contain information about source records that are merged to form master records. You can use the merge history activity reports to understand the number of records that are merged by the match process and users. You can also view the number of records that were merged with and without approval process and the number of records that weren't merged.

To create custom reports based on merge history activity reports, see "Create custom reports based on merge history activity " on page 153.

To view custom reports based on merge history activity reports, see "Viewing report details" on page 157.

To export custom reports based on merge history activity reports, see "Exporting report data for merge history activity reports" on page 158.

Rules and guidelines for creating a custom report

Before you create custom reports, consider the following rules and guidelines to create custom reports:

- Custom reports that you create appear for other users within the organization. If users don't have access to the records or fields that are used in the custom reports, they can't view the reports.
- You must configure appropriate fields to create meaningful custom reports. When you use multiple fields that create large volumes of report data, the custom report might become difficult to comprehend and might affect the performance of your environment.
- When you configure a custom report that can return more than 500 unique field values, you can view only the first 500 field values in the report table and chart.
- Supplier 360 SaaS can accommodate a maximum of 100 reports. This includes predefined and custom reports that are created by all users. To create a report after you reach this limit, consider deleting a custom report that you no longer need or contact administrator.
- You can't create schedules to publish custom reports. The existing custom reports use the schedules created by the administrator to update the report data. If you want to view the report data of existing custom reports instantly without any schedules, ensure that the fields used in custom reports are set to be reportable. To verify whether the fields are set to be reportable, contact your administrator.

Creating custom reports

You can create a custom report and add it as a widget to the dashboard.

To create a custom report, perform the following steps:

1. Create a custom report.
2. Add a chart to a custom report.

Create custom reports based on master records

To create a custom report based on master records, use the master records that belong to a business entity as the report data.

1. Click **New** > **Reports and Dashboards** > **Tabular Report** > **Create**.

   The **New Tabular Report** dialog box appears.
2. Specify the properties of the report.

   The following table describes the properties that you can configure when you create a custom report:

Property	Description
Display Name	Name of the custom report.
Internal ID	Unique identifier of the custom report.
Description	Description of the custom report.
Report Based On	The source for the custom report. Select **Master Records**.
Business Entity	The business entity that you want to build custom reports on.
Report Data	Data that's used to create an aggregated report for the dashboard or the individual record details page. You can select any of the following options: - All records. Creates an aggregated report for the dashboard based on all the business entity records. - Individual record. Creates an aggregated report for the individual record details page based on the applicable fields in the business entity. For example, an aggregated report that displays the average sales and profit details.

3. Click **Create**.

   A page with the name that you specify in the **Display Name** field appears.
4. Select the report style.

   You can select one of the following report styles:

   - Standard
   - Drill down
5. If you select **Standard**, select a dimension and click **Add**.
6. If you select **Drill down**, select dimensions at level 1, level 2, and level 3, and click **Add**.

   Setting level 3 dimension is optional.

You can view only the business entity fields that are enabled for reports as dimensions. The dynamic fields, business entity record fields, and fields in a nested field group don't appear as dimensions.

7. Select the measures, and click **Add**.

   The dynamic fields, business entity record fields, and fields in a nested field group don't appear as measures.
   The following table describes the properties that you can configure when you add fields as measures:

Property	Description
Count	Displays the count of values for the selected field. You can view the count for all fields.
Sum	Displays the total sum of integer, decimal, or double field values that are added as measures. You can view the sum when you add an integer, decimal, or double field as a measure.

   You can select up to five measures. You can view only the business entity fields that are enabled for reports as measures.

8. To filter the report data based on the field values, select the fields from **Filters**, and click **Add**.

   Based on the type of field that you select, you can select operators to filter values.
   The following table describes the fields and the operators that you can use to filter data:

Field Type	Properties
Date	Filters the field values based on the specified date. The field type supports the following operators: - Equals. Filters records with field values that exactly match the date value you entered. - Is Blank. Filters records with a blank value in the field. When you create reports with date and time values, the report displays only the date.
Text	Filters the field values based on the specified text. The field type supports the following operators: - Equals. Filters records with field values that match precisely with the text value you entered. **Note:** The value is case sensitive. - In. Filters records with field values that contain the text you entered. - Is Blank. Filters records with a blank value in the field.
Range	Filters the field values based on the specified numeric value or range. The field type supports the following operators: - Equals. Filters records with field values that precisely match the numeric value that you entered. - Range. Filters records with field values that are greater than or equal to the minimum value and less than or equal to the maximum value that you entered. - Is Blank. Filters records with a blank value in the field.

Field Type	Properties

Boolean	Filters the field values based on the values that you select.
	The field type supports the following operators:
	- Equals. Filters field values based on the following values that you select:
	  - Yes (True).
	  - No (False).
	- Is Blank. Filters records with a blank value in the field.

Picklist	Filters field values based on the values you select. The field type supports the following operators: - In. Filters field values that contain the values you enter select. - Is Blank. Filters records with a blank value in the field.

9. Click **Apply**.

   A preview of the report appears in a tabular format. The report preview displays up to 100 rows of sample data. Based on the selected dimension and measures, the sample data gets generated from the first 100 matching master records. The master records are sorted based on their creation date.

To view aggregate results for a specific business entity field, select the same field value for both dimension and measure. If you select different values for dimension and measure, the report displays how each dimension value correlates with a count of the selected measure.

Create custom reports based on records with validation errors

You can create records based on records with validation errors to display the validation statuses of master records in a business entity.

1. Click **New** > **Reports and Dashboards** > **Tabular Report** > **Create**.

   The **New Tabular Report** dialog box appears.

2. Specify the properties of the report.

   The following table describes the properties that you can configure when you create a custom report:

Property	Description
Display Name	Name of the custom report.
Internal ID	Unique identifier of the custom report.
Description	Description of the custom report.
Report Based On	The source for the custom report. Select **Records with Validation Errors** to generate a metadata report that displays information about records that contain validation errors.
Business Entity	The business entity that you want to build custom reports on.

3. Click **Create**.

   A page with the name that you specify in the **Display Name** field appears.

4. Select a dimension and a measure, and click **Add**.

You can select the following fields as a dimension or measure:

- Validation Status
- Error Type
- Error Severity
- Source System
- Fields with Validation Errors

5. Select a measure, and click **Add**.
6. To filter the report data based on the field values, select the fields from **Filters**, and click **Add**.

   The following table describes the fields that you can use to filters data:

Field Name	Properties
Validation Status	Filters the field values based on the validation statuses of records, such as pending, failed, and passed.
Error Type	Filters the field values based on the types of validation errors, such as mandatory fields missing or character limit exceeded.
Error Severity	Filters the field values based on the severity of the validation errors, such as information, error, or warning.
Source System	Filters the field values based on the source systems.
Fields with Validation Errors	Filters the field values based on the fields that contain the validation errors.

7. Click **Apply**.

   A preview of the report appears in a tabular format. The report preview displays up to 100 rows of sample data. Based on the selected dimension and measures, the sample data gets generated from the first 100 matching master records. The master records are sorted based on their creation date.

To view aggregate results for a specific attribute, select the same value for both dimension and measure. If you select different values for dimension and measure, the report displays how each dimension value correlates with a count of the selected measure attributes.

Create custom reports based on merge history activity

You can create merge history activity reports to view the number of records that are merged by the match process and users.

1. Click **New** > **Reports and Dashboards** > **Tabular Report** > **Create**.

   The **New Tabular Report** dialog box appears.
2. Specify the properties of the report.

The following table describes the properties that you can configure when you create a custom report:

Property	Description
Display Name	Name of the custom report.
Internal ID	Unique identifier of the custom report.
Description	Description of the custom report.
Report Based On	The source for the custom report. Select **Merge History Activity** to generate a metadata report that displays information about source records that are merged to form master records.
Business Entity	The business entity that you want to build custom reports on.

3. Click **Create**.

   A page with the name that you specify in the **Display Name** field appears.
4. Select a dimension and a measure, and click **Add**.

   You can select the following fields as a dimension or measure:

   - Source System
   - Declarative Rule
   - Match Outcome
   - Merged By
   - Merged On
5. Select a measure, and click **Add**.
6. To filter the report data based on the field values, select the fields from **Filters**, and click **Add**. The following table describes the fields and the operators that you can use to filters data:

Field Name	Properties
Source System	Filters the field values based on the source systems.
Declarative Rule	Filters the field values based on the declarative rules.

Field Name	Properties
Match Outcome	Filters the field values based on the outcome of the match and merge process. The field type supports the following match and merge process outcomes: - Auto-merged. Records that are merged automatically using match rules. - Auto-merged with Approval. Records that are merged automatically after the merge proposal is approved. - User Merged. Master records that are manually merged by users from the user interface. **Note:** When a subsequent automated merge batch process runs after a user merged with approval process, records that are merged by users with approval are included in the user merged record count. - Not Merged. Master records that didn't go through the merge process. Not Merged records include the following master records: - Records that were added in business applications and didn't participate in the match and merge process yet. - Unique master records that didn't go through the match and merge process. - Unmerged records that were previously merged. - User Merged with Approval. Master records that are manually merged by users from the user interface after the merge proposal is approved. **Note:** After you unmerge records, the unmerged records aren't tracked in the dashboard, and you can't differentiate between a new record and an unmerged record. To filter records that went through the match and merge process, select all match outcomes except Not Merged. This exclusion removes unique master records from the match outcome.
Merged By	Filters field values based on the users who merged them or last modified the record. The field type supports the following operators: - Equals. Searches for field values that exactly match the text value you entered. The value is case-sensitive. - In. Searches for field values that contain the text you entered.
Merged On	Filters field values based on the date when the records were merged. You can specify the date range in the following fields: - Start Date. Indicates the date when the merge process started. - End Date. Indicates the date when the merge process ended. When you create reports with date and time values, the report displays only the date.

7. Click **Apply**.

   A preview of the report appears in a tabular format. The report preview displays up to 100 rows of sample data. Based on the selected dimension and measure, the sample data gets generated from the first 100 matching master records. The master records are sorted based on their creation date.

To view aggregate results for a specific attribute, select the same value for both dimension and measure. If you select different values for dimension and measure, the report displays how each dimension value correlates with a count of the selected measure attributes.

Add a chart to the custom report

You can add a chart to the custom report you create. Also, you can customize the look and feel of the charts.

Note: If your custom reports contain multiple measures, use the bar chart template. Pie charts incorrectly display the data for reports with multiple measures.

1. On the toolbar of the reports creation page, click **Chart**.

   The **Templates** panel appears.

2. Select a chart template that you want to use to display the report data.

   To display the charts correctly on the report view page, select an appropriate template for the report data.

   The preview of the template appears in the preview panel.

   Note: You can add only the pie and column charts for a drill-down report.

3. Click **Save**.

   The report data appears on the selected chart template and report table.

Viewing reports

The **Reports** page displays the list of the custom reports that you create.

A report can display a maximum of 500 rows of records.

You can view additional report details of a selected report on the **Reports** page. The report details appear on the right side of the **Reports** page when you click the **Show Additional Details** icon. You can also sort and filter the reports based on the field and column names respectively.

The following image shows a sample Reports page:

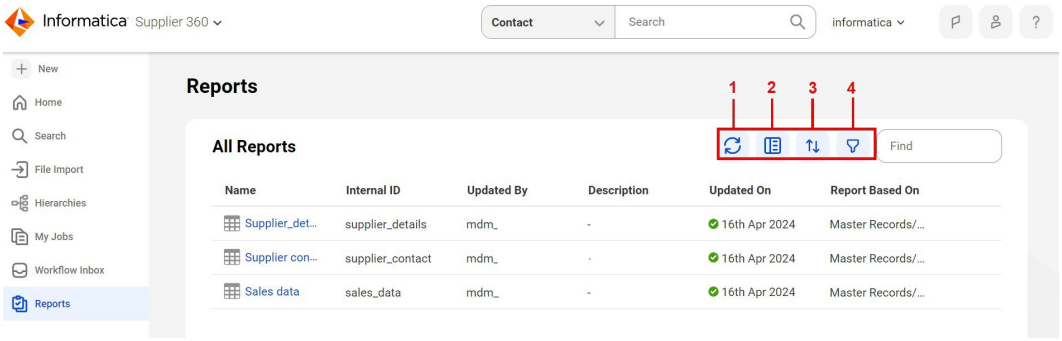

1. Refresh
2. Show Additional Details
3. Sort
4. Filter

The following table lists the different user interface elements that you can find on the **Reports** page:

User Interface Elements	Description
Refresh	Refreshes the **Reports** page. The newly created custom reports appear only after you refresh the page.
Show Additional Details	Displays additional report details of a selected report.
Sort	Displays the reports based on the selected field in ascending or descending order.
Filter	Lists the names of the columns based on which you can filter the reports. You can select the fields based on which you want to filter the reports.

Viewing report details

You can view the details of predefined and custom reports on the report details page. The report details page includes the Chart, Report, and Data Set panels to view report details. You can select a report to review its chart, report table, and data set.

Chart

Displays the chart associated with the selected report.

Report

Displays the report table associated with the selected report and the report data.

You can export the aggregated report table for all report types. For merge history activity reports, you can also export the aggregated report data set.

You can export the data to a CSV file, which can contain a maximum of 10,000 rows.

Note: If your report exceeds 10,000 rows, apply appropriate filters before you export the data. For example, you can create filters based on age criteria to export the data.

You can then use the CSV file for an in-depth analysis using an analytical application. The CSV file includes details of records, such as RuleSet ID, Rule ID, RuleSet Version, Source Primary Key, and MDM ID.

Note: You can also view the record details from the **Source Records** component of the master record that the source record contributes to.

To export the report data, click **Export Report** on the Report panel.

After you delete records, reports might continue to display the deleted records. To view the updated report, contact your administrator.

Data Set

Displays the report data that contributes to the selected report as search results. For more information about Data Set panel, see "Data set in reports" on page 157.

Data set in reports

The Data Set panel appears on the report details page only for reports that are based on validation errors, standard, and drill-down reports. By default, the Data Set panel doesn't display any data. To view the report data as search results, click a field value in the Chart panel.

Note: For merge history activity reports, you can download the aggregated report data set. For more information, see "Exporting report data for merge history activity reports" on page 158.

The following image shows the Data Set panel on the report details page of a standard report:

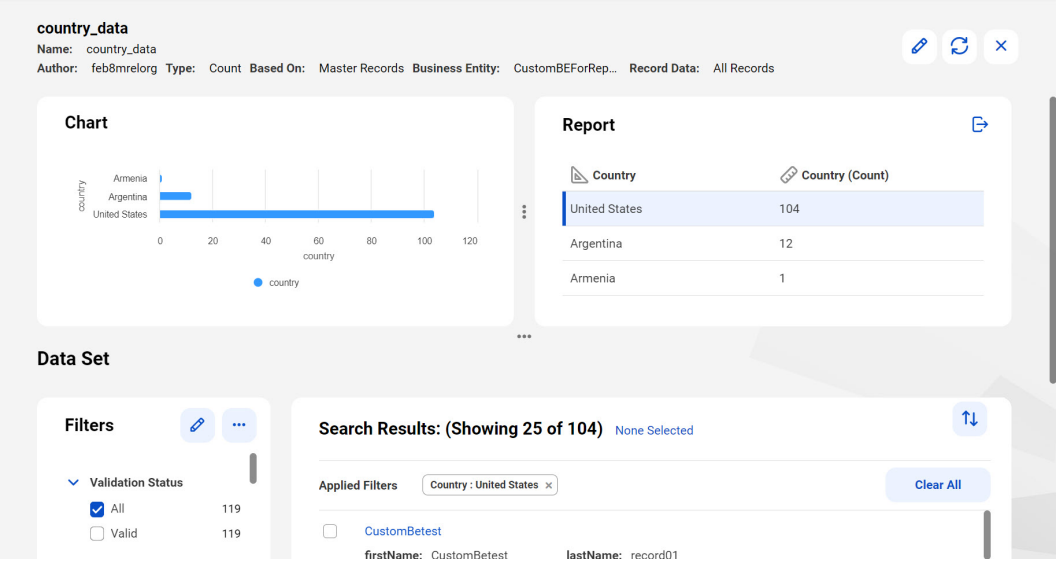

The configured dimensions and measures are applied as filters to the search results. You can also modify the filters to view a different set of search results. To reset the filters or view the report data associated with the selected report again, click a field value on the Chart panel.

Exporting reports

You can export the aggregated report table for all report types. For merge history activity reports, you can also export the aggregated report data set.

You can export data to a CSV file, which can contain a maximum of 10,000 rows.

Note: If your report exceeds 10,000 rows, apply appropriate filters before you export data. For example, you can create filters based on age criteria to export the data.

To export the report data, click **Export Report** on the Report panel.

When you export a report data set for a business entity that's removed from the business application, the exported report data includes deleted records. To exclude these records, refresh the **Home** page of your business application and try again.

Exporting report data for merge history activity reports

You can export the report data set that contributes to a selected report to a CSV file for merge history activity reports.

To export report data set to a CSV file, perform the following steps:

1. On the Reports panel, select the reports for which you want to export the report data.
2. From the selection menu, click **Export Report Data**.
   The exported CSV file contains the records that contribute to the selected report.

The following image shows the **Export Report Data** option on the report details page.

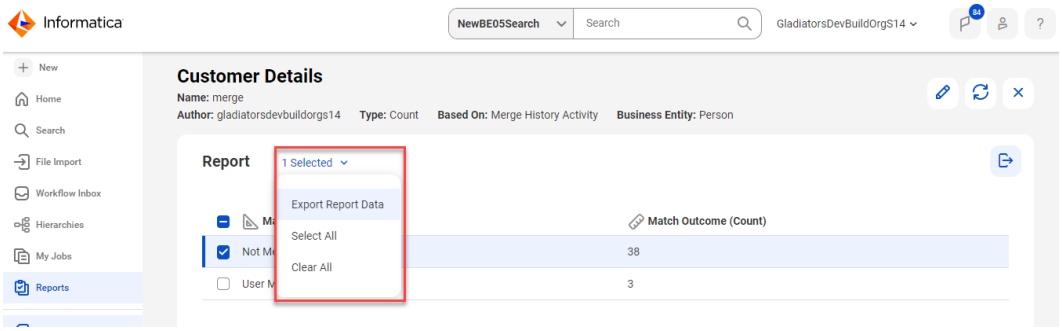

Finding reports

To find a report, you can enter a search text in the search box on the **Reports** page. A search can return multiple reports. You can sort and filter the search results to refine the search results. You can open any report and view the complete details of it.

Use the search box to perform a full-text search. You can search for reports across multiple business entities. You can filter records based on fields that contain values or are blank.

Note: The search box displays search results only when you use the report name displayed in the **Name** column as the search text.

When you select the **(Blank)** filter value for a field, ensure that you don't select other values for the field. If you select other values, MDM SaaS clears the selected **(Blank)** filter value.

Editing reports

If your user role permits, you can edit the reports that you create. You can add or modify the dimension and measures for the report and modify the chart template. After you edit the report data, you can save the report to view the report data.

If you can't edit any custom reports, contact your administrator to check whether the fields that the report uses are set to be reportable.

1. On the **Reports** page, open the report that you want to edit.
2. Click **Edit**.
3. Edit the dimension and measures of the report.
4. Click **Apply**.
5. To change the chart template, click **Chart**, and modify the template.
6. Click **Save**.

Deleting reports

If your user role permits, you can delete the reports that you create.

1. On the **Reports** page, open the report you want to delete.
2. Click **Actions** > **Delete**.

   A confirmation dialog box appears.
3. Click **OK**.

   The custom report is deleted.

Adding a widget to a record

On the record details page, you can add the aggregated reports created for the individual records as charts. You can add charts to the individual record details page as widgets. You can then select a report that you want the widget to display as a chart. For more information about widgets, see *Manage Dashboard*.

1. Search and find the record for which you want to add the widget.
2. Open the record, and click **Add Report**.

   The **Add Report** dialog box appears.
3. Enter the name of the report to add.

   The reports with matching names appear in a list.

   Note: To view all the available reports, type * in the search box.
4. Select a report from the list.

   The chart associated with the selected report appears in the preview panel.
5. Click **Add**.

   The chart appears on the widget.

CHAPTER 6

Establish the best version of the truth

Supplier 360 SaaS consolidates the most trustworthy data from multiple source systems into master records to establish the best version of the truth. The data from different source systems is stored in source records.

Use the **Source Records** page associated with a master record to review source records and patch records that contribute data to the master record. You can view trust scores for fields that help determine the best version of the truth. A higher trust score indicates a more trustworthy field value. If a field contains invalid data, such as a picklist without a value, or a field with an incorrect data type, the trust score is downgraded. Fields with valid data have a higher trust score. The trust calculation is based on settings and rules that are established by an administrator.

In addition to the trust scores, Supplier 360 SaaS uses survivorship criteria configured by administrators to establish the best version of the truth. You can manually override field values of records that Supplier 360 SaaS establishes as the best version of the truth. Additionally, you can view the trust score and survivorship criteria of the field values that identifies the best version of the truth.

You can manually merge master records into a single record. You can also unmerge the source records from a master record if they don't match.

If you manually merge master records, you can override field values in the manual merge preview. When you override a value, the application recalculates the trust score and shows the best version of the truth for the new master record, and you can preview the result of the override before you merge the records.

Override survivorship

A master record contains field values from multiple source records. The field values are selected from source records based on the survivorship criteria.

You can manually override the surviving field values of a master record with field values of other source records. For example, based on the survivorship configuration a master record includes a phone number from the HR source system. You can manually select the phone number from the Sales source system for the master record.

You can also override the trust score of fields within a field group or a nested field group. For example, when you have duplicate field group entries in different source records, you can override the trust score of the field group values.

You can override values of dynamic fields, including dynamic fields within field groups and nested field groups.

The following image shows duplicate field groups entries in different source records:

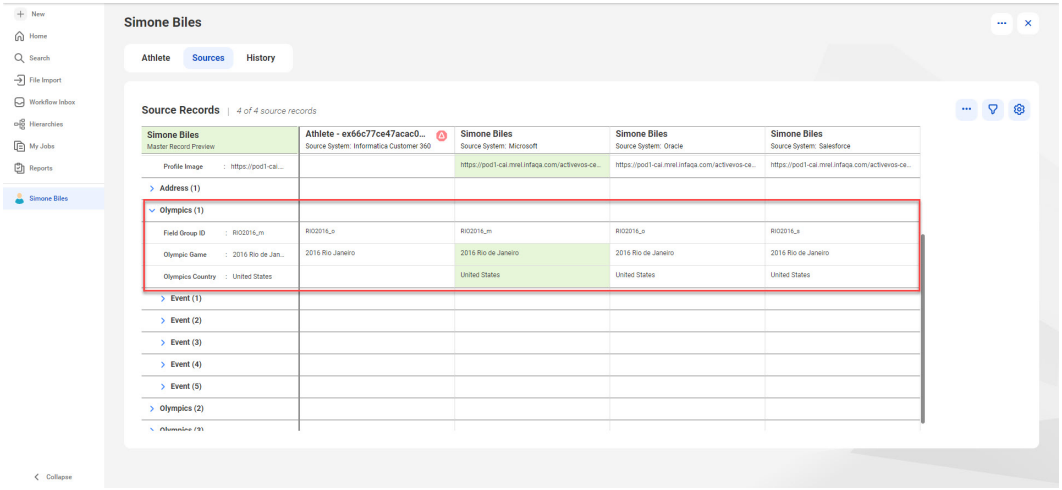

When you manually override a field value, the trust score of the selected field value is set to the highest value. The trust score does not decay over time, and the trust score of the field value is recalculated only when you manually remove the override. The trust score of the overridden field value remains the same when you update the overridden field or when you update other fields in the source record. The trust score of the overridden field value remains the same even when you merge the source records.

When you unmerge source records that contribute field values to override the master record field values, the new master record that's created retains the overridden values and the trust scores. The trust score is recalculated for the unmerged source records.

Overriding values of a master record

You can override the field values of a master record with field values from other source records.

1. From the search results, open the record that you want to override.

   The record appears on the **Record Details** page.

2. Click the **Source Records** tab.
3. To view source records that are contributors or not contributors and decide which values to override, use the **Contribution Category** filter.

The **Source Records** page displays contributing records after you apply the **Contribution Category** filter.

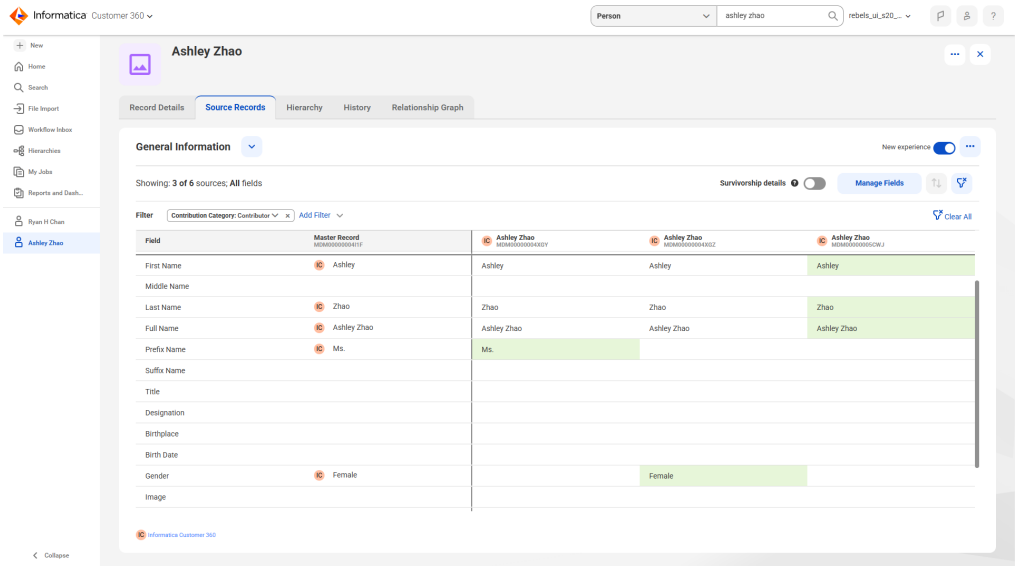

4. Optionally, to view fields with no value that you can't override, select **Override Status** > **Empty**.

   The **Source Records** page displays only the fields with no value.

5. Select the field value or field group that you want to override.

   If a field group is configured for deduplication, you can only override that field group as a whole entry. If the field group isn't configured for deduplication, you can override the field group values in the same way as general information fields.

6. Select **Override Surviving Value**.

7. In the confirmation dialog box, review the values to override, and click **Override**.

   The selected field value or field group value overrides the existing field value or field group value in the master record.
   The fields that were overridden display an override indicator with the message **Overridden**.

Removing an overridden field value

You can remove the overridden field values or field group values.

1. From the search results, open the record that contains manually overridden field values.

   The record appears on the **Record Details** page.

2. Click the **Source Records** tab.

3. To view source records that contain an overridden value and decide which values to remove, filter by **Override Status** > **Has Override**.

4. Hover over the field value or field group that was overridden, and select **Actions** > **Remove Override**.

   The trust score is recalculated to identify the field value or field group values with the highest trust score. The values with the highest trust score contribute to the master record.
   The override indicator disappears.

Unmerge source records

You can unmerge any source record that must not be associated with a particular master record. If an unmerged record reverts to a business ID it had before merging into its master record, the system restores the relationships associated with that business ID as if the merge didn't occur.

When you unmerge a source record, you can choose to unmerge relevant patch records. If a patch record isn’t enabled for selection after you select a source record to unmerge, it implies that the patch record is irrelevant to the selected source record. You can't unmerge patch records without unmerging the associated source records. The unmerged source and patch records are merged into a single master record.

When you unmerge a record, deleted field group entries in the master record don't affect the unmerged record. MDM SaaS recalculates trust scores for all entries in the unmerged record and includes the entries with the highest trust scores.

You can choose whether source records that you unmerge from a master record can merge back into the same master record during a match and merge job. However, even if you don't allow the records to merge back, the records can merge back in some scenarios.

Unmerged source records can merge back in the following scenarios:

- If you edit an unmerged record and a patch record is generated, or the unmerged record is merged with a different record, the unmerged record can merge back into the same master record through a match and merge job.
  For example, if you unmerge the source record John from the master record Jonathan, and then edit John, a patch record is generated for John. John can merge into Jonathan through a match and merge job.
- If an unmerged record and its former master record both match another record, the unmerged record can merge back into the master record.
  For example, you unmerge the source record Sara from the master record Sarah. When a match and merge job runs, the record Sierra matches with Sara and Sarah. Sara can merge back into Sarah along with Sierra.
- If unmerged records are manually merged into their master record, they can merge back into the same master record when a match and merge job runs.
  For example, you manually merge the source record Will into the master record Williams, and then unmerge Will from Williams. Will can merge into Williams through a match and merge job.

If unmerged records are merged into their master record during a match and merge job and you don't allow the records to merge back, the records don't merge back into the same master record automatically. This behavior continues even if you update match fields for any of the records.

For example, the source record Ricardo merges into the master record Richard through a match and merge job because both records share the same value for the address field. You unmerge Ricardo from Richard and choose for Ricardo to not merge back automatically. Ricardo and Richard don't merge back through a match and merge job even if you update the address for one or both of these records.

Unmerging source records

You can unmerge any source record that must not be associated with a particular master record. When you unmerge multiple source records from a master record, you can unmerge them into separate master records or merge them into a single master record.

1. From the search results, open the record.

   The record appears on the **Record Details** page.
2. Click the **Source Records** tab.

   The master record and the associated source records appear.

3. To understand the best version of truth and review trust score and survivorship criteria, enable **Survivorship details**.
4. Go to the record that you want to unmerge, and click **Actions** > **Unmerge**.

   The source record is selected for unmerge.
5. Select any additional source records, or a combination of source records and relevant patch records that you want to unmerge.
6. Click **Unmerge**.

   The **Unmerge Records** dialog box appears.
7. If you selected a single source record or a combination of source records and relevant patch records in step 4 or 5, proceed to step 11.
8. If you selected multiple source records and no patch records in step 4 or 5, select one of the following options:

Option	Description
Unmerge into separate master records	Unmerges each source record into a separate master record.
Unmerge into a single master record	Unmerges all the selected records and merges them into a single master record.

9. Select whether to open the new master records after unmerge.
10. Select whether to allow the unmerged records to merge back into the master record through match and merge jobs.

    By default, unmerged records don't merge back automatically. If needed, you can manually merge the unmerged records into the master record later.
11. Perform one of the following actions:

Action	Description
Unmerge	Unmerges the selected records into a single master record or multiple master records without requiring any approval, and the unmerged records remain in the active state. Based on your user role privileges, if approval isn't required, the Unmerge action is available.
Send for Approval	Sends the unmerge proposal for approval and retains the selected records in the active state. After an approver approves the proposal, the records are unmerged. Based on your user role privileges, if approval is required or optional, the Send for Approval action is available.

Merge master records

Based on the match configuration, some records are automatically merged, and some are queued for manual merge. You can manually review these master records and then merge them to create a new master record. The trust score and survivorship criteria identify the field values for the master record. All the source records of the merged master records appear as the source records of the newly created master record.

You can manually merge master records even if their contributing source records are disabled for matching. After you merge them and create a new master record, the match and merge status of those merged source records remain unchanged.

If you delete an entry in a deduplicated field group from a master record, MDM SaaS handles the deleted entry in one of the following ways:

- If you merge a record created after the delete action, MDM SaaS recalculates trust scores and selects an entry from the merged record to replace the deleted entry.
- If you merge a record created before the delete action, entries from the merged record don't replace the deleted entry.

When you search for records or after you open a record, you can select relevant records and merge them.

1. Select the business entity and use the search box to search for the records.
2. Perform one of the following tasks:
   - Open a record to which you want to merge records.
   - Select the records that you want to merge.
     The first search result becomes the master record to which the other selected records are merged.
3. Click **Selected** > **Merge Records**.

   The **Merge Records** page appears and displays the preview of the new merged master record.
4. Click **Add Records**.

   The **Add Records** dialog box appears.
5. Search for the records and select the master records that you want to merge, and click **Add**.

   Note: You can select only 20 records at a time.

   All master records are labeled with a random number that is unique to the record. The number of the contributing record is displayed on the field in the master record preview column.
6. To view records that are selected or not selected for record merge, use the **Merge Decision** filter.
7. Select the records that you want to merge.
8. Optionally, override field values or field group values in the merge preview.
   a. Select the field value or field group that you want to override.

      If a field group is configured for deduplication, you can only override a whole field group entry. If the field group isn't configured for deduplication, you can override the field group values in the same way as general information fields.

   b. Select **Override Surviving Value**.

   c. In the confirmation dialog box, review the values to override, and click **Override**.

      The selected field value or field group value overrides the field value or field group value on the Merge Records page.
      The fields that were overridden display an override indicator with the message **Overridden**.

   Overriding field values in the merge preview doesn't change the overrides in the contributing records before they are merged.
9. Optionally, remove an overridden field value or field group value.
   a. Hover over the field value or field group that was overridden.

   b. Select **Actions** > **Remove Preview Override**.

      The trust score is recalculated to identify the field value or field group values with the highest trust score. The values with the highest trust score contribute to the preview of the new master record. The override indicator disappears.
10. Optionally, ignore all overrides for a field from contributing records.
    a. Hover over the field value or field group that was overridden.

b. Select **Actions** > **Ignore Merge Candidates Overrides**.

The trust score is recalculated to identify the field value or field group value with the highest trust score and ignore overrides from contributing records. The fields that ignore overrides from contributing records display an override indicator with the message **All Overrides Removed**.
If you override a field value in the merge preview, select the option **Remove Merge Candidate and Preview Overrides** instead.

11. Submit the records for merge.

Action	Description
Merge	Based on your user role privileges, if no approval is required, the merge action is available. When you merge, the selected master records are merged to the master record that you opened or the first record on the search results page, and the record is set to the active state.
Send for Approval	Based on your user role privileges, if an approval is required or optional, the send for approval action is available. When you send for approval, a merge review workflow task is created and available for approvers to review. The records remain in the active state, but the records are merged only after the merge proposal is approved.

Note: If the merge proposal is pending for approval or some of the records are pending for any other approval process, the new master record is moved to the pending state and you can't add additional records to the new master record.

CHAPTER 7

Import and match data

You can import data from a CSV file into C360 either directly or by matching it with existing source records. You can also match the input data with master records and then enrich the input data with the matching master records.

Based on your business requirements, you can import and match data in the following ways:

Import all data

You can import all data in a CSV file into Supplier 360 SaaS directly to standardize and store the data. You can import new records or update and delete record sections in Supplier 360 SaaS.

Match and export data

You can match external data in a CSV file with master data without storing the input data. You can then enrich the input data by exporting the matching master records and input data to a CSV file. You can download the CSV file to view the exported values from the master data and the input file.

Match and import selected data

You can match external data in a CSV file with source records, preview and analyze the match results, and then import selected records or all records.

Import all data

You can import data, such as business entity records, relationship records, and hierarchies, from a CSV file into Supplier 360 SaaS. The import process parses the data in the CSV file and maps the columns of the CSV file to the fields of the selected business entity or relationship.

You can import source records, overwrite all the field values of existing records, update field values and delete field group entries in record sections, or delete source records. You can include business IDs in the CSV file when you import source records. Additionally, you can delete relationships and hierarchies in bulk through file import.

For example, you can import a new person record, overwrite all the field values of an existing record, update only the home address of an existing record, or delete the billing address of an existing record.

A record section can include all the root fields, fields in a field group, or fields in a nested field group.

You can choose to update only the fields that contain values in the import file without overwriting the entire record. The update applies only to the fields that are present in the import file and mapped to the target field. Other fields remain unchanged. You can also control whether the update overwrites target values with null when mapped fields contain no data in the import file. If mapped fields have no value in the import file, you can overwrite the target values with null, or leave them unchanged.

Note: You can't update patch records through import.

For more information about the different types of import in Supplier 360 SaaS, see "Import type" on page 171.

Prerequisites for importing all data

Before you import all data in a CSV file without matching, perform the following prerequisites:

- Ensure that the maximum size of a CSV file that you use is 100 MB.
- The source primary keys of records can contain the following characters:

  `~!'={}|:@#$^&*()-_+,<>?`\`

  The source primary keys of records don't contain a slash (/), backslash (\), period (.), percentage (%), semicolon (;), or double quotation mark (").

  Note: You can use special characters in source primary keys when you add records through ingress jobs or file import. However, if you edit a record that contains any special characters that aren't allowed in its source primary key on the record details page, MDM SaaS fails to update the record.
- The source primary keys can contain up to 255 special and alphanumeric characters, with English letters only. If the source primary keys contains more than 255 characters, the additional characters are truncated.
- The source primary keys of field groups can contain the following special characters:

  colon (:), hyphen (-), pipe (|), period (.), or underscore (_).

  Note: You can use special characters in source primary keys when you add field group entries through ingress jobs or file import. However, if a field group entry contains special characters that aren't allowed in its source primary key, you might not be able to create, edit, and view field group values on the record details page.
-
- The field values don't contain a single backslash (\). You can use a double backslash (\\). If the existing field values contain a single backslash (\), contact Informatica Global Customer Support.
- The CSV file doesn't contain date values in `dd.mm.yyyy`, `mm.dd.yyyy`, and `yyyy.mm.dd` formats. If the date values are in these formats, you can't import the CSV file.

  For more information about the supported date formats, see "Uploading a file" on page 185.
- The CSV file that you import contains supported and valid population names. You can't import records that contain invalid population names. For the list of populations that you can use, contact your administrator.
- You can specify business IDs in the CSV file.
- The population names in the CSV file must be in lowercase.
- You can specify multiple populations for the records in the CSV file.
- If the CSV file contains records to exclude from the match process, the **NotReadyForMatch** column in the file must be set to True. All the records that don't contain any value for this column participate in the match process.
- If the CSV file contains double field type values greater than 300 digits, the import process considers the first 15 digits, converts the consecutive 300 digits into the exponential format, and ignores the remaining digits.
- When you import decimal values, consider the following guidelines:

  - The values must conform to the defined precision and scale.

- The total number of digits before the decimal point must be lesser than or equal to the difference between the precision and the scale.

The following table describes the sample success and failure scenarios when you import decimal values:

Precision	Scale	Decimal Value	Result
8	3	87654.321	Imports the decimal value because the value is within the default precision and the defined scale.
3	2	1234.5	Rejects the value because the number of digits before the decimal point isn't lesser than or equal to the difference between the precision and the scale.
5	2	1.345	Rejects the value because the number of digits after the decimal point isn't lesser than or equal to the difference between the precision and the scale.
5	5	1.345	The import process rejects the value because the digits before the decimal point is not within the difference between the precision and scale. The different between the precision and scale is 0.

- When you specify the upsert operation type in the CSV file or select create or overwrite records in the user interface, the import process considers attribute-level privileges to add or update field values.
- When you specify the delete operation type in the CSV file, the import process doesn't consider the attribute-level privileges.
- Ensure that the file name that you upload doesn't contain any forward slash (/).
- Ensure that the file name that you upload is less than 255 characters in length.
- Ensure that you don't use double extensions in file names.
  For example, use `person.csv`. Ensure that you don't use `person.newclients.csv`.
- Ensure that you don't use the `.csv` extension for any other file formats.
  For example, if you save a PDF file with a `.csv` extension and then import it, the import fails.

Import type

You can specify the type of import to perform in the user interface or in the CSV file.

In the CSV file, you can specify the following operation types:

Operation Type	Description
Upsert	Adds new records or overwrites all the field values of existing records.
Patch	Updates field values in record sections. For example, you can update the date of birth and mailing address of an existing record.
Delete	Performs the following operations: - Deletes source records. - Deletes relationships and hierarchies. - Deletes the field group entries in record sections. For example, you can delete the billing address in a record. You can delete the field group entries but not the root field values by using the delete operation type. To delete a specific root field value, specify all the root field values except the field value that you want to delete in the CSV file. **Note:** You can't use the delete operation type to delete any root field values of a record. For more information about deleting field group entries, see "Delete field group entries" on page 179.

In the user interface, you can select one of the following import types:

- Create or overwrite records. Adds new records and overwrites all the field values of existing records through the upsert operation. Also, you can create new relationships and hierarchies.
- Update record sections. Updates field values in record sections through the patch operation. A record section include all the root fields, fields in field groups, or fields in a nested field group.
- Update only fields containing data. Updates only the fields that contain data in the import file without overwriting the entire record. You can control how the update handles empty fields in the import file. You can overwrite the existing field values with null, or leave them unchanged.

The import type specified in the CSV file takes precedence over the import type that you specify in the user interface.

For example, specify the operation type as patch for the root field of a record in the CSV file and select the import type create or overwrite records. The import process considers patch as the operation and updates the values in the root fields and field groups of the record.

Note: If you don't specify the operation type in the CSV file, the import process uses the import type that you set in the user interface.

Create or overwrite records

When you choose to create or overwrite records, the import process adds new records and overwrites all the field values of existing records.

Ensure that your CSV file contains values for all the fields for the existing records. If you specify only the field values that you want to update in the CSV file, the import process updates the specified field values and sets the other field values to null.

For example, consider the following existing records:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Type	Address Line 1	City
SFDC_123	Mary	T	02/19/1990	3788	Home	2nd Street, Fairlands, North Block	Mumbai
SFDC_536	Andrew	Chris	09/10/1983	5672	Billing	4th Avenue, 8th Street, ECR	Chennai

Import the following records by using the create or overwrite records option:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Type	Address Line 1	City
SFDC_345	Charles	Richard	03/20/1988	6785	Office	14 Washington Square N, Block 10011	New York
SFDC_536	Andrew	Chris	09/10/1980	5672	Billing	10, Broadway, MH Street, ADH Colony	Bangalore

When the import is complete, you can view the following records:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Type	Address Line 1	City
SFDC_123	Mary	T	02/19/1990	3788	Home	2nd Street, Fairlands, North Block	Mumbai
SFDC_345	Charles	Richard	03/20/1988	6785	Office	14 Washington Square N, Block 10011	New York
SFDC_536	Andrew	Chris	09/10/1980	5672	Billing	10, Broadway, MH Street, ADH Colony	Bangalore

In the preceding example, you can see that the Charles record is added, and the Andrew record is updated.

Create related records

You can import a CSV file by using the create or overwrite records option to create relationships between source records. Ensure that the CSV file contains the source primary keys of the records you want to relate and these records belong to the same source system.

After you upload the CSV file, select the target relationship for which you want to import data.

For example, if you specify Organization as Entity 1 and Person as Entity 2 in a relationship, enter the source primary keys of the Organization records in the From column and the source primary keys of the Person records in the To column. Also, specify the source primary key for each relationship.

The following table lists sample relationship data that you can import by using create or overwrite records option:

Source Primary Key	From_sourcePKey	To_sourcePKey
101	67985f037ecc1d791818613d	6798679e7ecc1d79181861e6
102	67985f3f7ecc1d7918186154	67985f3f7ecc1d7918186154
103	67985f5d7ecc1d791818616b	6798679e7ecc1d79181861e6

After the import is complete, you can view the relationships between records.

Create hierarchies

You can import a CSV file by using the create or overwrite records option, to create hierarchy relationships between source records. The CSV file must contain the source primary keys of root, parent, and child records. Ensure that the source records that you want to relate belong to the same source system.

After you upload the CSV file, select the target hierarchy for which you want to import data.

For example, consider a hierarchy having Insurance to Hospital relationship.

The following table lists sample hierarchy data that you can import by using create or overwrite records option:

Hierarchy Instance_SPkey	Instance_Name	InsToHos.SPkey	Root SPKey	Parent_SPkey	Child_SPkey
hierarchy_create_Pkey	HierarchyCreate	Hos_100	6798dc871640a65a216aa1cd	6798dc871640a65a216aa1cd	67985f857ecc1d7918186182
hierarchy_create_Pkey	HierarchyCreate	Hos_101	6798dc871640a65a216aa1cd	6798dc871640a65a216aa1cd	67985fa87ecc1d7918186199

The following table describes the column names in the CSV file:

Column Name	Description
Hierarchy Instance_SPkey	Unique source primary key that identifies the hierarchy.
Instance_Name	Name of the hierarchy.

Column Name	Description
InsToHos.SPkey	Unique source primary key of the hierarchical relationship to create between the records.
Instance_Root SPKey	Source primary key of the top-level parent record.
Parent_SPkey	Source primary key of the parent record.
Child_SPkey	Source primary key of the child record.

After the import is complete, you can view the hierarchy created between the records.

Import data with business ID

You can import source records with their business IDs.

If a business ID in the input file matches an existing source record, the import process merges the input record with the existing source record and contributes to the corresponding master record. If the business ID doesn't match any existing source records, the import process creates a new record.

For example, consider that business ID 121000000000002 exists in Customer 360 SaaS, and business ID 121000000000004 doesn't exist in Customer 360 SaaS.

The following table lists the source records that you plan to import:

Business ID	SourcePkey	First Name	Last Name	Address Line1	Address Line2	City
121000000000002	bigAIData_893964_22	Dilyar	Shanbhag	0193 Rojas Underpass Suite 256	Suite 795	North Andrewtown
121000000000002	bigAIData_893964_23	Ambika	Shanbhag	1154 Hickman Walk Apt. 884	Suite 361	Cindyland
121000000000004	bigAIData_893964_1	Barbara	Kamath	631 Wolf Roads	Suite 128	Rileystad
121000000000004	bigAIData_893964_2	Tony	Kamath	9142 Campbell Pike Suite	Suite 510	Nataliehaven
121000000000004	bigAIData_893964_3	Alex	Kamath	410 Williams Run	Suite 764	Haynesburgh

The records with the business ID 121000000000002 merge with the existing source records, and they contribute to the corresponding master record. Additionally, all input records with the business ID 121000000000004 are merged to create a master record.

For more information about importing data with business IDs, see

Update root fields and field group entries

You can update the values of root fields, field groups, and nested field groups. To update field values in a section, you must include all the field values of that section. If you include only few fields in a section, the import process removes values from other fields.

For example, consider that the Charles record has root fields, such as First Name, Last Name, Date of Birth, and Gender, and then an address field group with fields, such as Address Line 1, City, and Country.

To update values of the First Name and Address Line 1 fields, you must also include values for the Last Name, Date of Birth, and Gender fields of the root section and values for the City and Country fields of the address field group section. If you exclude them, the import process removes values from these fields and updates the values of the First Name and Address Line 1 fields.

Ensure that you specify the source primary key of the record and the specific field group ID of existing records that you want to update.

Consider the following example for updating field values in root section and the field group entry:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Type	Address Line 1	City
SFDC_345	Charles	Richard	03/20/1988	6785	Office	14 Washington Square N, Block 10011	New York
SFDC_536	Andrew	Chris	09/10/1980	5672	Billing	10 Broadway, MH Street, ADH Colony	Bangalore

To update the date of birth of the Charles record and the address line 1 of the Andrew record, import the following records by using the update record sections option:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Type	Address Line 1	City
SFDC_345	Charles	Richard	03/20/1987				
SFDC_536				5672	Billing	5th Avenue, Fairlands, ABC Layout	Bangalore

When the import is complete, you can view the following records:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Type	Address Line 1	City
SFDC_345	Charles	Richard	03/20/1987	6785	Office	14 Washington Square N, Block 10011	New York
SFDC_536	Andrew	Chris	09/10/1980	5672	Billing	5th Avenue, Fairlands, ABC Layout	Bangalore

In the preceding sample, you can see that the date of birth value is updated for the Charles record, and the billing address is updated for the Andrew record.

Update fields containing data

When you choose to update only the fields that contain data in the import file, the import process updates the values that you provide. Other fields in the record keep their existing values.

Example: Updating specific fields

Consider the following existing records:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Title	Address Type	Address Line 1	Country
SFDC_123	John	T	02/19/1990	3788	Mr.	Home	2nd Street, Fairlands, North Block	United States
SFDC_536	Andrew	Chris	09/10/1983	5672	Dr.	Billing	4th Avenue, 8th Street, ECR	United States
SFDC_640	Neena	Gupta	03/07/1985	8678	Ms.	Billing	Flat 202, Block B, Green Acres Apartment, Hebbal	India

Include the new values in the import file to update John's last name and the date of birth for Andrew and Neena. Map only the fields that you want to update. The import process ignores the mapped fields with empty values and updates only the mapped fields with the values that you provide.

To update the records, use the following import file:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Title	Address Type	Address Line 1
SFDC_123	John	Smith	02/19/1990	3788	Mr.	Home	2nd Street, Fairlands, North Block
SFDC_536	Andrew	Chris	09/10/1984	5672		Billing	4th Avenue, 8th Street, ECR
SFDC_640	Neena	Gupta	03/07/1984	8678	Ms.		Flat 202, Block B, Green Acres Apartment, Hebbal

The following table shows the records after the import is complete:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Title	Address Type	Address Line 1	Country
SFDC_123	John	Smith	02/19/1990	3788	Mr.	Home	2nd Street, Fairlands, North Block	United States
SFDC_536	Andrew	Chris	09/10/1984	5672	Dr.	Billing	4th Avenue, 8th Street, ECR	United States
SFDC_640	Neena	Gupta	03/07/1984	8678	Ms.	Billing	Flat 202, Block B, Green Acres Apartment, Hebbal	India

The import process updates John's last name and the date of birth for Andrew and Neena. All other fields remain unchanged, even though the import file contains some empty fields.

Setting empty fields in the import file to null

By default, the import process ignores empty fields in the import file and leaves the corresponding target fields unchanged. You can change this behavior to overwrite all empty fields, or only specific ones, with null instead.

When you change the setting for an individual field, it overrides the setting you applied for all empty fields.

When you set empty fields to null, the import process determines each field value based on the following precedence:

1. If the import file contains a value, the import process updates the mapped field with that value.
2. If the import file doesn't contain a value and the field has a default value configured while mapping fields, the import process updates the mapped field with the default value.
3. If the import file doesn't contain a value and the field has no default value, the import process sets the mapped field to a null value.

Example: Overwriting all empty fields with null

This example uses the same existing records and import file as the previous example, and you choose to overwrite all empty fields with null. In this example, the affected fields have no default values, so the import process sets them to null.

The following table shows the records after the import is complete:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Title	Address Type	Address Line 1	Country
SFDC_123	John	Smith	02/19/1990	3788	Mr.	Home	2nd Street, Fairlands, North Block	United States
SFDC_536	Andrew	Chris	09/10/1984	5672		Billing	4th Avenue, 8th Street, ECR	United States
SFDC_640	Neena	Gupta	03/07/1984	8678	Ms.		Flat 202, Block B, Green Acres Apartment, Hebbal	India

The import process updates the date of birth for Andrew and Neena. The import process also overwrites the following fields with null values:

- Title for Andrew
- Address Type for Neena

Example: Overwriting a single field with null

To overwrite only specific empty fields with null, you can choose the individual fields to set to null during mapping. For example, you can set only the Address Type field to null. When you import, the import process sets only Address Type to null and ignores all other empty fields. If Address Type has a default value, the import process uses the default value instead.

The following table shows the records after the import is complete:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Title	Address Type	Address Line 1	Country
SFDC_123	John	Smith	02/19/1990	3788	Mr.	Home	2nd Street, Fairlands, North Block	United States
SFDC_536	Andrew	Chris	09/10/1984	5672	Dr.	Billing	4th Avenue, 8th Street, ECR	United States
SFDC_640	Neena	Gupta	03/07/1984	8678	Ms.		Flat 202, Block B, Green Acres Apartment, Hebbal	India

Delete field group entries

To delete field group entries, set the operation type column to delete in the CSV file. When you want to delete a specific root field value, specify all the root field values except the field value that you want to delete in the CSV file. You can't use the delete operation type to delete the root field values, hierarchy and relationship records.

Note: You can't use the delete operation type to delete all the root field values of a record.

For example, consider the following existing records:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Type	Address Line 1	City
SFDC_123	Mary	T	02/19/1990	3788	Home	2nd Street, Fairlands, North Block	Mumbai
SFDC_345	Charles	Richard	03/20/1988	6785	Office	14 Washington Square N, Block 10011	New York

Import the following records by specifying the delete operation type:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Operation Type
SFDC_123				3788	Delete
SFDC_345	Charles	Richard			

When the import is complete, you can view the following records:

Source Primary Key	First Name	Last Name	Date of Birth	Address Field Group ID	Address Type	Address Line 1	City
SFDC_123	Mary	T	02/19/1990				
SFDC_345	Charles	Richard		6785	Office	14 Washington Square N, Block 10011	New York

In the preceding example, you can see that the date of birth is deleted from the Charles record, and the office address is deleted from the Mary record.

Delete source records

To delete source records that you don't need, specify delete in the operation type column in the CSV file. When you want to delete a source record, specify the values for the required root fields and the source primary key of the source record.

For example, consider the following records:

Source Primary Key	First Name	Last Name	Date of Birth	Address Type	Address Line 1	City
SFDC_148	Tom	T	02/19/1992	Home	2nd Street, Fairlands, North Block	Mumbai
SFDC_560	Hary	Richard	03/20/1983	Office	14 Washington Square N, Block 10011	New York

Import the following records by specifying the delete operation type and values for the mandatory fields:

Source Primary Key	Operation Type	First Name	Last Name	Date of Birth	Address Type	Address Line 1
SFDC_148	Delete	Tom		02/19/1992		
SFDC_560	Delete	Hary		03/20/1983		

After the import is complete, the specified source records are deleted.

Delete relationships

To delete relationships that you don't need, specify delete in the operation type column in the CSV file. When you delete relationships, specify the source primary keys of the records that are related. Also, specify the unique source primary keys of the relationship.

After you upload the CSV file, select the target relationship to delete between the records.

The following table lists sample relationship data that you can import by specifying the operation type as delete:

Source Primary Key	_from_id_sourcePKey	_to_id_sourcePKey	Operation Type
101	67985f037ecc1d791818613d	6798679e7ecc1d79181861e6	Delete
102	67985f3f7ecc1d7918186154	67985f3f7ecc1d7918186154	Delete
103	67985f5d7ecc1d791818616b	6798679e7ecc1d79181861e6	Delete

After the import is complete, the specified relationships are deleted.

Delete hierarchies

To delete hierarchies that you don't need, specify delete in the operation type column in the CSV file. When you delete hierarchies, specify the source primary keys of root, parent, and child records.

After you upload the CSV file, select the target hierarchy to perform the delete operation.
Note: When you delete a hierarchy, MDM SaaS deletes only the relationship between the parent and child records. MDM SaaS doesn't delete the hierarchy or the records within the hierarchy.

For example, consider a hierarchy having Insurance to Hospital relationship.

The following table lists sample hierarchy data that you can import by specifying the operation type as delete:

Hierarchy Instance_SPkey	Instance_Name	InsToHos.SPkey	Root SPKey	Parent_SPkey	Child_SPkey	Operation Type
hierarchy_create_Pkey	HierarchyCreate	Hos_100	6798dc871640a65a216aa1cd	6798dc871640a65a216aa1cd	67985f857ecc1d7918186182	Delete
hierarchy_create_Pkey	HierarchyCreate	Hos_101	6798dc871640a65a216aa1cd	6798dc871640a65a216aa1cd	67985fa87ecc1d7918186199	Delete

The following table describes the column names present in the CSV file:

Column Name	Description
Hierarchy Instance_SPkey	Unique source primary key that identifies the hierarchy.
Instance_Name	Name of the hierarchy.
InsToHos.SPkey	Unique source primary key of the hierarchical relationship to create between the records.
Instance_Root SPKey	Source primary key of the top-level parent record.
Parent_SPkey	Source primary key of the parent record.
Child_SPkey	Source primary key of the child record.
Operation Type	Type of operation to perform, such as delete.

After the import is complete, the specified hierarchy data is deleted.

Restore source records

To restore the deleted source records, specify restore in the operation type column in the CSV file. When you want to restore a deleted source record, specify the values for required root fields and the source primary key of the record.

For example, consider the following deleted records:

Source Primary Key	First Name	Last Name	Date of Birth	Address Type	Address Line 1	City
SFDC_148	Tom	T	02/19/1992	Home	2nd Street, Fairlands, North Block	Mumbai
SFDC_560	Hary	Richard	03/20/1983	Office	14 Washington Square N, Block 10011	New York

Import the following records by specifying the restore operation type and field values for the mandatory fields:

Source Primary Key	Operation Type	First Name	Last Name	Date of Birth	Address Type	Address Line 1
SFDC_148	Restore	Tom		02/19/1992		
SFDC_560	Restore	Hary		03/20/1983		

After the import is complete, the specified records are restored.

Import process

Your user role must have permission to import data.

Note: The predefined user roles such as Customer 360 SaaS Data Steward, Customer 360 SaaS Manager, and Customer 360 SaaS Analyst doesn't have predefined privileges set for the dictionary asset type. If you apply the existing business entity mapping that contains the dictionary fields configured with data quality rule association, the import job fails. To import the file, ensure that your administrator creates custom user roles and configures the privileges for the dictionary asset type.

To import data, perform the following tasks:

1. Upload a CSV file to import.
2. Verify the automatically mapped fields. Manually map the fields that have incorrect mapping to ensure that the columns of the source file match the target fields.
   When you import hierarchies, map the source columns with the required target fields. The automatically mapped fields display confidence indicators to indicate the accuracy of the mappings. If fields have low confidence scores or incorrect mappings, manually map the source columns with the required target fields.
3. Preview and verify the field mapping and import the file.

Field mapping

After you upload the source file, select the appropriate target business entities, relationships, or hierarchies to which you want to import data.

Based on the target business entities, relationships, or hierarchies that you select, the import process automatically maps the columns of your source file to suitable target fields. For each mapped field, a confidence indicator appears that indicates the level of confidence of the field mapping.

If you are not in agreement with the system-suggested field mapping, manually map the source columns with the appropriate target fields. If you use any field in a field group, ensure that you map all the required fields of the field group.

The following table describes the confidence indicators:

Confidence Indicator	Description
	Indicates a high level of confidence with the field mapping.
	Indicates a medium level of confidence with the field mapping. If you are not in agreement with this mapping, delete this mapping and modify the field mapping as required.
	Indicates a low level of confidence with the field mapping. If you are not in agreement with this mapping, delete this mapping and modify the field mapping as required.

The following image shows some mapped fields with confidence indicators:

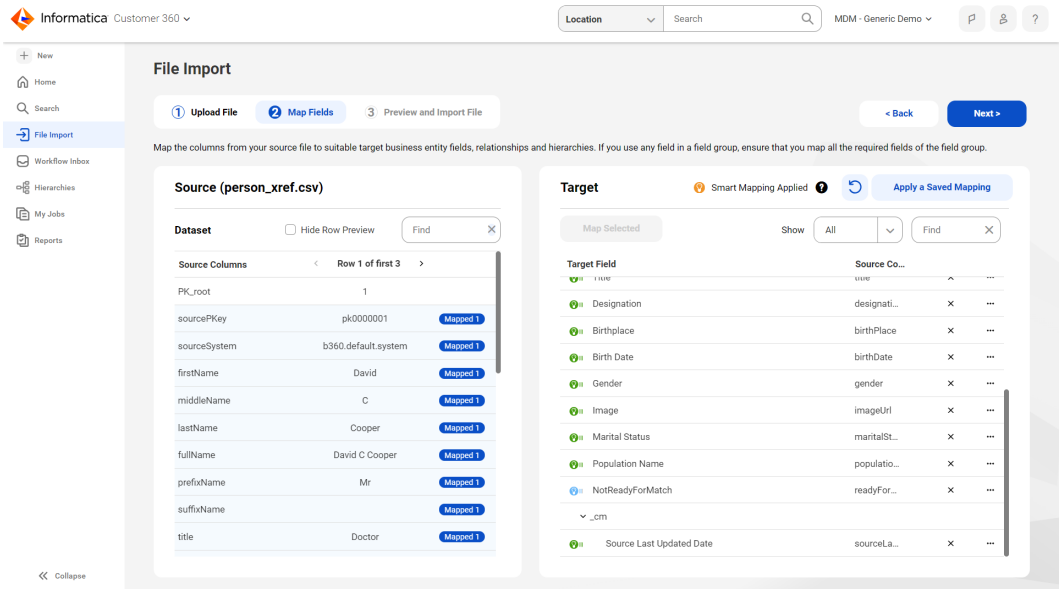

You can map the `Source Last Updated Date` of root fields and field groups. The `Source Last Updated Date` field captures the last updated date of fields in the source records. By default, when you import incremental data into your business application, if the `Source Last Updated Date` for the record is an older date or a date in the future, the incremental changes are rejected in the load step. If the `Source Last Updated Date` is the latest date, the incremental changes to the record succeeds.

For example, if the existing `Source Last Updated Date` for a record is 16/09/2022 and you update the `Source Last Updated Date` to 10/09/2022 and import the data, the job rejects the record. If you update the date to a future date and import the data, the job rejects the record. If you update the date to a near future date which is not greater or equal to the current date, such as 18/09/2022, the job imports the incremental changes.

However, you can choose to forcefully import incremental data into your business application irrespective of the last updated date of the source record.

Mapping system-generated fields

Before you map system-generated fields, map the columns from your source file to target business entity fields. Then, map the columns from your source file to the system-generated fields.

The following table describes the system-generated fields that you need to map:

System-generated field	Required	Description
Source Primary Key	Yes	The primary key of a source record.
Population Name	No	Name of the population that you want to use to improve match accuracy. The population accounts for the inevitable variations and errors that might exist in name, address, and other identification data of a particular population. If you don't map the Population Name field, the default population of the match configuration is used.
NotReadyForMatch	No	Specifies whether to exclude a record from participating in the match process. If the value is set to True, the record does not participate in the match process. Default is False. If you don't map the NotReadyForMatch field, the records participate in the match process. **Note:** You can't set the NotReadyForMatch field to null.

The following image shows the File Import page with mappings of system-generated fields:

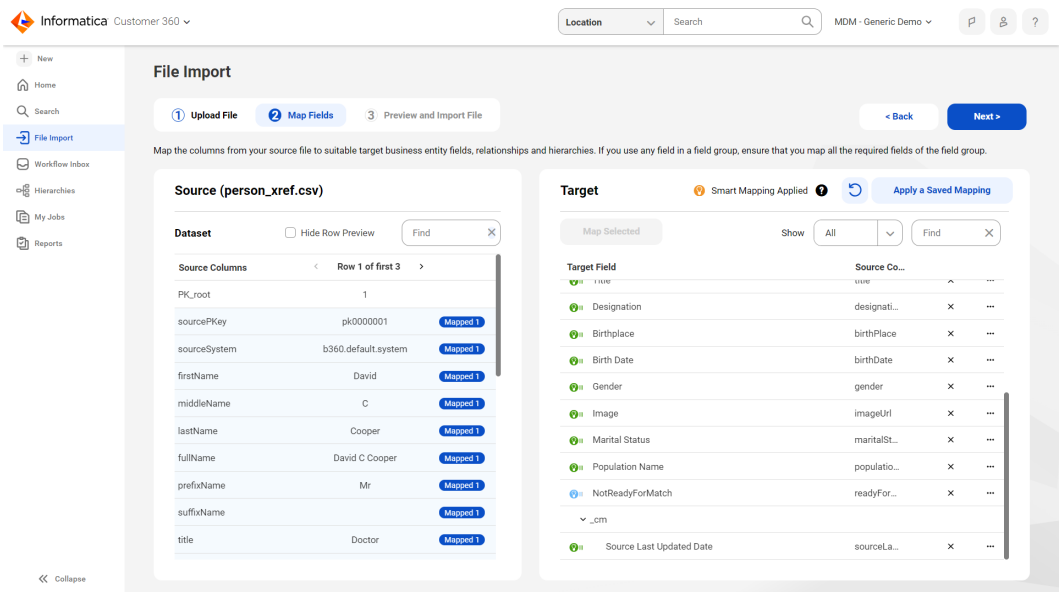

Manage mapping

After you verify the field mapping, you can save the mapping for future use. You can save up to 100 mappings at a time. If you have reached this limit, you can overwrite an existing mapping or delete some saved mappings.

Before you import the file, you can preview and verify the mapping.

Note: You cannot save mappings if you import hierarchies.

Uploading a file

To import data into Supplier 360 SaaS, upload a CSV file with the relevant information. Import the data into then Informatica Customer 360 SaaS source system. Ensure that the CSV file doesn't contain column headers named as 'Key' and the following special characters: / \ * ? % : > " <

To import a CSV file that contains records with multiple entries for a field group, ensure that you represent such records with a row for each field group entry. For example, you want to import three address entries for a record. In the CSV file, enter three rows for the record with different address values and duplicate values for the rest of the fields. After you import the data, the address values appear as different entries under the Address field group. Fields without values are updated with their default values after the import.

1. On the **File Import** page, start the **Import All Data** wizard.

   The **Upload File** page appears.
2. To select a file to upload, click **Browse**, and select the CSV source file.

   The first 10 records appear in the preview section.
3. Select the source system for the records that you import.

   The following table describes the predefined source systems that Supplier 360 SaaS contains:

Predefined Source System	Description
Default	The default source system for all business applications except Supplier 360 SaaS. Business applications use this source system when users create records.
Informatica Customer 360	The default source system for Supplier 360 SaaS. Supplier 360 SaaS uses this source system when users create records in Supplier 360 SaaS.

   Note: Before you import the records, change the source system to Informatica Customer 360. By default, Supplier 360 SaaS saves the records that you import in the Default source system. After you import the records, you can't save changes to these records in the Default source system.
4. To update existing records irrespective of the last updated dates in the source system, enable **Force Record Update**.
5. Select one of the following types of import that you want to perform:

   Create or overwrite records

   Adds new records and overwrites all the field values of the existing records through the upsert operation.
   For more information about importing new records or overwriting field values of existing records, see "Create or overwrite records" on page 171.

Update record sections

Updates field values in record sections through the patch operation. A record section can include the root fields, fields in a field group, or fields in a nested field group.
For more information about updating field values in record sections, see "Update root fields and field group entries" on page 175.

When you perform the patch operation and import records without any updates to field values, the records are rejected in the load step. However, the import job processes each record internally, which might cause the load step to run longer than expected.

If you don't want to reject the records, ensure that you select **Force Record Update**.

Update only fields containing data

Updates only the fields that contain values in the import file without overwriting the entire record. The update applies only to the fields in the import file that are mapped to the target fields.

You can also specify the import type in the CSV file by adding the operation type, such as upsert, patch, and delete. The operation type specified in the CSV file takes precedence over the import type that you specify in the user interface.

For more information about operation types, see "Import type" on page 171.

6. If you select **Update only fields containing data** and want to overwrite the mapped target field values to null for empty fields in the import file, select **Set empty fields to null**.

   Note: After migrating your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release, you can update only fields that contain values and set empty fields to null.

7. In the **File Import Settings** section, verify the system-suggested settings based on your data, and update any setting that is incorrect.

   The following table describes the available import settings:

Field	Description
Delimiter	Character that represents the break between data values in the input file. Select a predefined delimiter or select **Other** to define a custom delimiter.
Text Qualifier	Symbols used in the file to enclose a string. When a text qualifier appears within the field value, ensure that you provide an escape character. For example, if the field value that you try to import is `"David"` and the text qualifier is ", ensure that you input the field value in the following format: `"""David"""` The outer pair of double quotes denotes the text qualifier. The inner pair denotes the escape character, and the innermost pair is part of the field value. If you omit the pair that denotes the escape character, the import process doesn't consider double quotes as part of the field value.
Encode Type	Unicode encoding type.
Use Data Starting from Line	Row number in the file from where you want to import data. Use this field to exclude headers. Default is 2.

Field	Description
Contains column headers	Indicates whether the source file includes column headers.
Column Header Row	Header row number in the file.
Regional settings	Indicates whether you want to configure date and time formats.
Date Pattern	Format of the date fields in the file. You can use one of the following formats: - `mm-dd-yyyy` For example, 12-05-2000 - `mm/dd/yyyy` For example, 01/15/2010 - `dd-mm-yyyy` For example, 10-11-2020 - `dd/mm/yyyy` For example, 06/10/1990 - `yyyy-mm-dd` For example, 2025-10-01 - `yyyy/mm/dd` For example, 2022/11/15 - `dd-mmm-yyyy` For example, 01-MAR-1999 **Note:** Ensure that you don't use the `dd.mm.yyyy`, `mm.dd.yyyy`, and `yyyy.mm.dd` formats.
Date Time Pattern	Format of the date and time fields in the file. The time zone is UTC (Coordinated Universal Time).
Decimal Separator	Character used as a decimal separator. Default is period (.).
Thousand Separator	Character used as a thousand separator. Default is comma (,).

8. Click **Next**.

   The **Map Fields** page appears.

Mapping fields

After you select the file to import, select a target business entity, relationship, or hierarchy, and then use the system suggested mapping or modify the mapping as required.

Note: To ensure that Supplier 360 SaaS validates field values, you must map the fields that have data quality rule associations.

1. On the **Map Fields** page of the **File Import** wizard, click **Add** to select the relevant target business entity, relationship, or hierarchy.

   The import process automatically maps the column headers with the fields.

2. To apply a saved mapping, click **Apply a Saved Mapping**, select the mapping, and click **Apply**.
3. To manually map any field, perform one of the following tasks:
   - Drag a source column to a target field.
   - Select a source column and a corresponding target field, and click **Map Selected**.

   Note: When you import hierarchies, you must manually map fields from the source file to the corresponding target fields.

   The import process maps the field accordingly.

   When you map a field that has a data quality rule association or a DaaS rule association, you must have the create and update privileges for all fields associated with the same rule association. If you don't have the required privileges, you can't proceed to the next step.
4. Verify the mapping of all fields and ensure that all the required fields are mapped.
5. Click **Next**.

   The **Preview and Import File** page appears.

Previewing and importing data

After you map the fields, you can save the mapping for future use. Use the preview section to preview and verify the mapping, and then import the data. The preview displays default values of fields.

1. On the **Preview and Import File** page of the **File Import** wizard, perform one of the following tasks:
   - To save the mapping, select **Save as a new mapping**, and specify a name for the mapping.

     Note: Ensure that you provide a unique mapping name.

     If you provide an existing mapping name, you can't save the mapping.
   - To overwrite an existing mapping, select **Overwrite an existing mapping**, click **Select**, select a mapping, and then click **Apply**.
   - To discard the mapping, select **Don't save**.

   The following image shows the preview of a sample relationship data import:

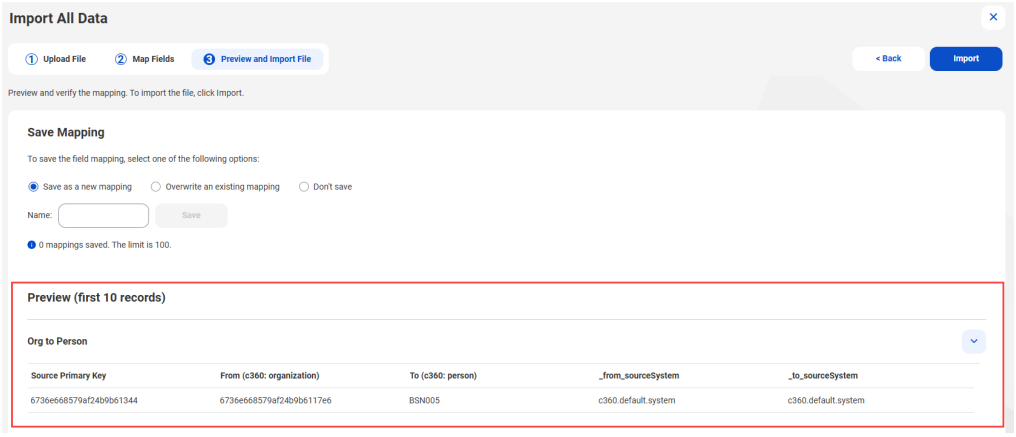

2. To import the file, click **Import**

   The import process starts.

A job is created to import the data. You get a notification after the import process is complete. You can monitor the status of job in the **My Jobs** page.

Match and export data

You can match data in a CSV file with master data without storing the file or its data in MDM SaaS. You can then export selected values from the master data and the input file to another CSV file.

You can use an existing match model of a business entity for matching.

For example, consider an insurance company that launches new products to the market. The insurance company invites its existing customers to the product launch to boost sales. Customers use their email IDs to register for the product launch. The insurance company wants to know which policies the customers purchased so that it can categorize customers based on their policies. The insurance company uploads a CSV file that contains the email IDs of the registered customers to match with master records and selects the required insurance policy details to export from master records. The match and export process populates the insurance policies purchased by customers from the master records to another CSV file. The insurance company can now categorize customers based on the policies they purchased.

Prerequisites for matching and exporting data

Before you match and export data, perform the following prerequisites:

- Ensure that the maximum size of a CSV file that you use is 100 MB.
- Ensure that the maximum number of rows in the CSV file is 100,000.
- Ensure that you belong to one of the following predefined user roles:
  - Admin
  - Supplier 360 Data Steward
- To preview the match output data, ensure that the match model you select contains only declarative rules and doesn't contain any errors. Also, the input CSV file must not contain errors.
- Before you override the population of the match model, ensure that the master records are indexed with the population that you plan to use. For information about the populations that you can use, contact your administrator.
- Master records that aren't ready for match also participate in the match process.

Matching and exporting data

To match data in a CSV file with master data and export it, you need to select a suitable match model. You can override the population of the model based on the population of the data that you want to match. You also need to map the input columns from the CSV file to the business entity fields.

For example, if input data includes records from the Chinese population, but the population for the match model is set to **usa**, you can specify the Chinese population. After you map the input columns from the CSV file to the business entity fields, you can select the values to export from the CSV file and master data. You can then preview the match output and export it.

The preview might not be an accurate representation of the match output as the process uses limited data from the input file. For example, if the input file contains seven address entries for the first record, the match process uses only five entries for the preview. Therefore, if the first five address entries don't match the master data, the record might not appear as a match even though the last address entries match the master data.

If multiple master records match with a single record in the CSV file, the match process generates multiple record pairs. For example, consider the master records John Smith Sr. and John Smith Jr. If both records match with a John Smith record in the CSV file, the match process generates one record pair for John Smith Sr. and the John Smith record and another pair for John Smith Jr. and the John Smith record. When you

export data to the CSV file, you can configure whether to include record pairs that have the highest score or record pairs that are matched by the highest-ranked rule.

To match and export data, perform the following steps:

1. Upload a CSV file that contains data you want to match with the master data.
2. Select a match model to use for the match process.
3. Map the columns from your CSV file to the fields of the selected business entity.
4. Select the values to export.
5. Preview the input data and their match output details, and then export the data.

Step 1. Upload a file

To match and export data, upload an input CSV file that contains data you want to match with the master data. Supplier 360 SaaS doesn't store the input CSV file that you upload.

1. On the **File Import** page, start the **Match and Export Data** wizard.

   The **Upload File** page appears.
2. To select a file to upload, click **Browse**, and select the source file.

   The first 10 rows of the input CSV file appear in the preview section.
3. In the **File Import Settings** section, verify the system-suggested settings based on your data, and update any setting that is incorrect.

   The following table describes the available import settings:

Field	Description
Delimiter	Character that represents the break between data values in the input file. Select a predefined delimiter or select **Other** to define a custom delimiter.
Text Qualifier	Symbols used in the file to enclose a string. When a text qualifier appears within the field value, ensure that you provide an escape character. For example, if the field value that you try to import is `"David"` and the text qualifier is ", ensure that you input the field value in the following format: `"""David"""` The outer pair of double quotes denotes the text qualifier. The inner pair denotes the escape character, and the innermost pair is part of the field value. If you omit the pair that denotes the escape character, the import process doesn't consider double quotes as part of the field value.
Encode Type	Unicode encoding type.
Use Data Starting from Line	Row number in the file from where you want to import data. Use this field to exclude headers. Default is 2.
Contains column headers	Indicates whether the source file includes column headers.
Column Header Row	Header row number in the file.

Field	Description
Regional settings	Indicates whether you want to configure date and time formats.
Date Pattern	Format of the date fields in the file. You can use one of the following formats: - `mm-dd-yyyy` For example, 12-05-2000 - `mm/dd/yyyy` For example, 01/15/2010 - `dd-mm-yyyy` For example, 10-11-2020 - `dd/mm/yyyy` For example, 06/10/1990 - `yyyy-mm-dd` For example, 2025-10-01 - `yyyy/mm/dd` For example, 2022/11/15 - `dd-mmm-yyyy` For example, 01-MAR-1999 **Note:** Ensure that you don't use the `dd.mm.yyyy`, `mm.dd.yyyy`, and `yyyy.mm.dd` formats.
Date Time Pattern	Format of the date and time fields in the file. The time zone is UTC (Coordinated Universal Time).
Decimal Separator	Character used as a decimal separator. Default is period (.).
Thousand Separator	Character used as a thousand separator. Default is comma (,).

4. Click **Next**.

   The **Select Match Model** page appears.

Step 2. Select a match model

You can use a match model of a business entity to match data in the input CSV file with the master data. Ensure that the match model that you select doesn't include only machine learning models but also includes declarative rules.

1. On the **Select Match Model** page of the **Match and Export Data** wizard, select a business entity.
2. Select a match model and its corresponding version that you want to use for matching.

   Note: Ensure that your user role has read access to the fields that the match model uses. Otherwise, the match model doesn’t appear for selection.
3. To determine which record pair to export when an input record matches multiple master records, select one of the following options:
   - Match Score. Indicates whether to identify record pairs that have the highest match score.
   - Rule Rank. Indicates whether to identify record pairs that are matched by the highest-ranked rule.
4. Optionally, override the population that the match model uses as default population.

5. Click **Next**.

   The **Map Fields** page appears.

Step 3. Map fields

You can map the columns from the input CSV file to the business entity fields that the selected match model uses for matching. Supplier 360 SaaS automatically maps some of the columns from the CSV file to the business entity fields based on their confidence score. If required, you can modify the mapping and manually map the columns from the CSV file to the business entity fields.

1. On the **Map Fields** page of the **Match and Export Data** wizard, drag a source column to a business entity field to map them.
2. Click **Apply a Saved Mapping**, select the mapping, and click **Apply**.
3. Verify the mapping of all the fields and ensure that all the required fields are mapped.
4. Click **Next**.

   The **Select Values to Export** page appears.

Step 4. Select values to export

You can select the values that you want to export from the master data and the input file. Supplier 360 SaaS exports the selected values, and the master data values appear blank for the records that don't match. Select at least one source column and a business entity field to export.

1. On the **Select Values to Export** page of the **Match and Export Data** wizard, drag the source columns and the business entity fields that you want to export to the **Fields to Export** section.
2. To export all the source columns, click **Add all the source columns**.
3. Click **Next**.

   The **Preview and Export** page appears.

Step 5. Preview and export data

After you select the values to export, you can preview the first five rows of the input data and their match output details. You can then start the match and export process.

1. On the **Preview and Export** page of the **Match and Export Data** wizard, preview the match output data.
2. Optionally, save the mapping for future use.
   a. To save the mapping, select **Save as a new mapping**, and specify a name for the mapping.

      Note: When you save the mapping, the fields and columns that you select for export are also saved with the mapping.

   b. To overwrite an existing mapping, select **Overwrite an existing mapping**, click **Select**, select a mapping, and then click **Apply**.

   a. To discard the mapping, select **Don't save**.
3. To export the file, click **Export**.

   A job runs to match and export the data. You can monitor the status of job on the **My Jobs** page. You can also download and view the match output report.

Match and import selected data

You can match data in an input file with source records and then import selected records or all records. You can preview and analyze the match results before you import records. Supplier 360 SaaS doesn't store the input file data until you import it.

For example, an automobile manufacturing company wants to procure auto ancillary parts. The company shortlists vendors and uploads a CSV file that contains the shortlisted vendor records. The company wants to match records in the CSV file with all the source records in Supplier 360 SaaS and import selected records. After the match process completes, the preview results show records that match and those that don't match. The company selects the records that don't match to import the new vendors.

Prerequisites for matching and importing selected data

Before you match and import selected data, perform the following prerequisites:

- Ensure that the maximum size of a CSV file that you use is 100 MB.
- Ensure that the maximum number of rows in the CSV file is 100,000.
- Ensure that you belong to one of the following predefined user roles:
  - Admin
  - Supplier 360 Data Steward
- To preview the match output data, ensure that the match model you select contains only declarative rules and doesn't contain any errors. Also, the input CSV file must not contain errors.
- Before you override the population of the match model, ensure that the source records are indexed with the population that you plan to use. For information about the populations that you can use, contact your administrator.

Matching and importing selected data

To match data in a CSV file with source records and import it, you need to select a suitable match model. You can override the population of the model based on the population of the data that you want to match.

For example, if input data includes records from the Chinese population, but the population for the match model is set to **usa**, you can specify the Chinese population. You also need to map the input columns from the CSV file to the business entity fields. After you map the input columns from the CSV file to the business entity fields, you can preview and analyze the match results. The preview results display the first 50 records in the input file that qualified for automated and manual merge and the records that don't match any of the source records. You can analyze the preview results and then import selected records or all records.

The preview might not be an accurate representation of the match output because the match process uses limited data from the input file. For example, if the input file contains 100 records, the match process uses only the first 50 records for preview. If the first 50 records don't match the source records, the preview results might not show any matching records even though the last 50 records might match the source records.

To match and import selected data, perform the following steps:

1. Upload a CSV file with data to match with the source records.
2. Select a match model to use for the match process.
3. Map the columns from your CSV file to the fields of the selected business entity.
4. Preview and analyze the match results, and then import records.

Step 1. Upload a file

To match and import selected data, upload an input CSV file with data to match with source records.

1. On the **File Import** page, start the **Match and Import Selected Data** wizard.

   The **Upload File** page appears.

2. To select a file to upload, click **Browse**, and select the CSV source file.

   The first 10 records appear in the preview section.

3. In the **File Import Settings** section, verify the system-suggested settings based on your data, and update any setting that is incorrect.

   The following table describes the available import settings:

Field	Description
Delimiter	Character that represents the break between data values in the input file. Select a predefined delimiter or select **Other** to define a custom delimiter.
Text Qualifier	Symbols used in the file to enclose a string. When a text qualifier appears within the field value, ensure that you provide an escape character. For example, if the field value that you try to import is `"David"` and the text qualifier is ", ensure that you input the field value in the following format: `"""David"""` The outer pair of double quotes denotes the text qualifier. The inner pair denotes the escape character, and the innermost pair is part of the field value. If you omit the pair that denotes the escape character, the import process doesn't consider double quotes as part of the field value.
Encode Type	Unicode encoding type.
Use Data Starting from Line	Row number in the file from where you want to import data. Use this field to exclude headers. Default is 2.
Contains column headers	Indicates whether the source file includes column headers.
Column Header Row	Header row number in the file.
Regional settings	Indicates whether you want to configure date and time formats.

Field	Description
Date Pattern	Format of the date fields in the file. You can use one of the following formats: - `mm-dd-yyyy` For example, 12-05-2000 - `mm/dd/yyyy` For example, 01/15/2010 - `dd-mm-yyyy` For example, 10-11-2020 - `dd/mm/yyyy` For example, 06/10/1990 - `yyyy-mm-dd` For example, 2025-10-01 - `yyyy/mm/dd` For example, 2022/11/15 - `dd-mmm-yyyy` For example, 01-MAR-1999 **Note:** Ensure that you don't use the `dd.mm.yyyy`, `mm.dd.yyyy`, and `yyyy.mm.dd` formats.
Date Time Pattern	Format of the date and time fields in the file. The time zone is UTC (Coordinated Universal Time).
Decimal Separator	Character used as a decimal separator. Default is period (.).
Thousand Separator	Character used as a thousand separator. Default is comma (,).

4. Click **Next**.

   The **Select Match Model** page appears.

Step 2. Select a match model

You can use a match model of a business entity to match data in the input CSV file with source records. Ensure that the match model that you select includes at least one declarative rule.

1. On the **Select Match Model** page of the **Match and Import Selected Data** wizard, select a business entity.
2. Select a match model and its corresponding version that you want to use for matching.

   Note: Ensure that your user role has read access to the fields that the match model uses. Otherwise, the match model doesn't appear for selection.
3. Optionally, override the population that the match model uses as default population.
4. Click **Next**.

   The **Map Fields** page appears.

Step 3. Map fields

You can map the columns from the input CSV file to the business entity fields that the selected match model uses for matching. Supplier 360 SaaS automatically maps some of the columns from the CSV file to the

business entity fields based on their confidence scores. If required, you can modify the mapping and manually map the columns from the CSV file to the business entity fields.

1. On the **Map Fields** page of the **Match and Import Selected Data** wizard, drag a source column to a business entity field to map them.
2. Click **Apply a Saved Mapping**, select the mapping, and click **Apply**.
3. Verify the mapping of all the fields and ensure that all the required fields are mapped.

   Note: To indicate the match fields present in the selected match model, a tick (✓) icon appears next to each of the match fields in the **Target** section.
4. Click **Next**.

   The **Preview Record Pairs** page appears.

Step 4. Preview record pairs and import records

You can preview and analyze the match results and then import records. The match process matches the first 50 records in the input file with source records and displays the matching record pairs for preview. After you analyze the preview results, you can select and import the records immediately or import them later.

1. On the **Preview Record Pairs** page of the **Match and Import Selected Data** wizard, preview and analyze the match results displayed in the **Match Output Preview** section.

   You can preview the match results of the first 50 records in the input file. The preview results might not be an accurate representation of the match output as the process uses limited data from the input file. The following image shows a preview of sample match results:

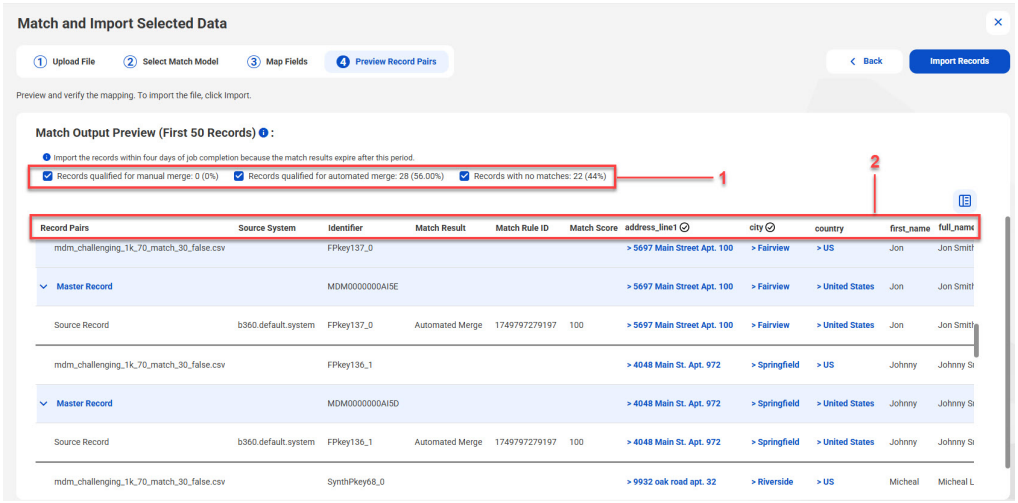

1. Filters for the match results
2. List of matching record pairs

The following table describes the different actions that you can perform on the match results:

Action	Description
Filter	Filter the match results based on the record category. You can select the following options: - Records qualified for manual merge. Displays the record pairs that qualified for manual merge. - Records qualified for automated merge. Displays the record pairs that qualified for automated merge. - Records with no matches. Displays the unmatched records.

Analyze	Analyze the match results of the first 50 records in the input file. You can analyze the following details of the match results:
	- Record Pairs. Displays the record pairs that the match process generated after matching the first 50 records in the input file with the source records. You can also view the master records of the matching source records. You can expand or collapse the master records to view or hide the contributing source records.
	- Source System. Displays the source systems of record pairs.
	- Identifier. Displays the unique identifiers of the source and master records, such as business IDs of master records and source primary keys of source records.
	- Match Result. Displays the match results of the record pairs. You can view one of the following match results:
	  - Automated Merge. Indicates that the record pairs are qualified for automated merge.
	  - Manual Merge. Indicates that the record pairs are qualified for manual merge.
	  - Unmatched. Indicates that the records in the input file haven't matched with any of the source records.
	- Match Rule ID. Displays the identifiers of directed AI match rules that formed the record pairs.
	- Match Score. Displays the match scores of the record pairs.
	- Matching input columns. Displays the columns in the input file that matched with fields in the source records. The matching input columns vary based on the columns present in the input file.

2. After you preview and analyze the match results, select the record categories that you want to import.
3. Click **Import Records**.

   The **Select Records to Import** dialog box appears.
4. To import records, select one of the following options:
   - Select records now. Allows to select the records that you want to import now. You can select the records based on the preview results.
   - Select records later. Allows to select the records to import after the match process.
5. If you choose **Select records now**, in the **Records to import** section, select the record categories that you want to import, and click **OK**.

   A job runs to match all records in the input file with source records. You can monitor the job status on the **My Jobs** page. After the job completes, the selected records are imported into Supplier 360 SaaS.

6. If you choose **Select records later**, perform the following tasks:

   a. Click **OK**.

      A job runs to match all records in the input file with source records. You can monitor the job status on the **My Jobs** page.
      The following image shows a sample job on the **My Jobs** page:

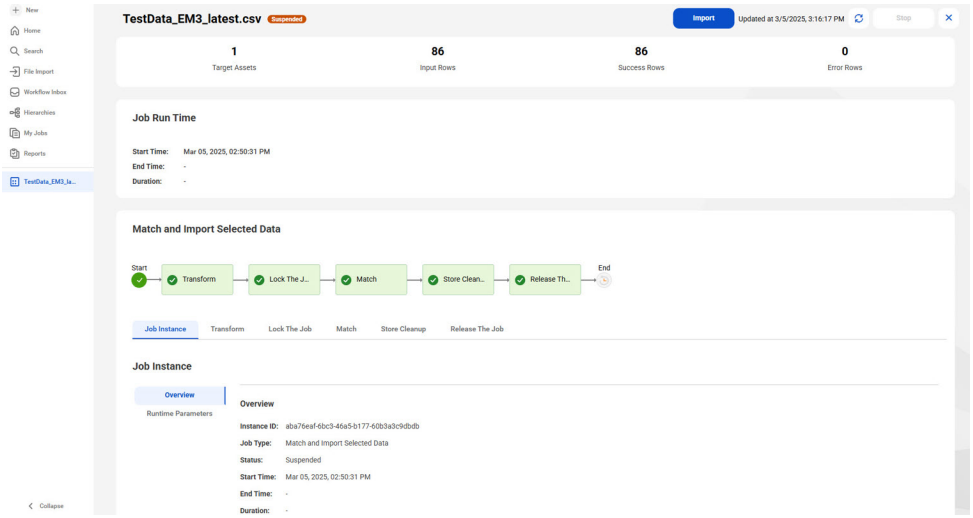

   b. On the **My Jobs** page, click **Import**.

      Important: You must import the records within four days after the job completes the **Release The Job** step. Otherwise, the match results expire.

      On the **Import Data** page, you can preview the record pairs that the match process generated after matching all the records in the input file with source records.

      The following image shows the sample record pairs on the **Import Data** page:

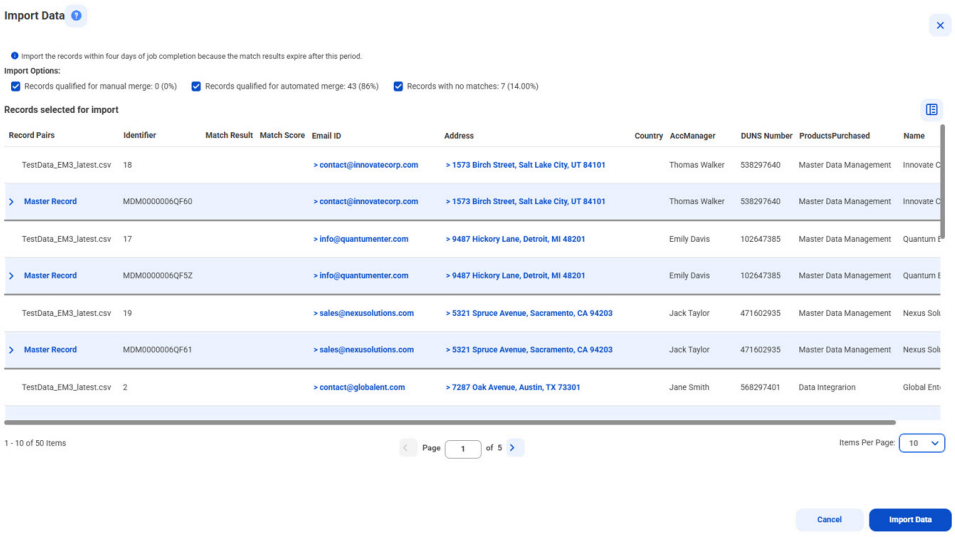

   c. Preview and analyze the match results, and select the record categories you want to import.

   d. Click **Import Data**.

      The job resumes its run from the **Release The Job** step. After the job completes, the selected records are imported into Supplier 360 SaaS.

7. Optionally, download and view the match output report on the **My Jobs** page.
    a. Click the **Match** tab, and then click **Output**.
    b. Select the record categories that you want download.
    c. Click **Download**.

       The **Export** dialog box appears.
    d. Click **Export**.

CHAPTER 8

Manage hierarchical and non-hierarchical relationships

Relationships show how records are related to one another. You can create and manage hierarchical and non-hierarchical relationships between records. Hierarchical relationships represent a hierarchical structure or parent-child relationships between records. Non-hierarchical relationships are between records that are related with a predefined relationship or with a business entity field.

Hierarchical relationships

A hierarchy contains first-level nodes, child records, and relationships between the records. The hierarchy relationships that you can create depend on your hierarchy model.

Records related with a relationship

You can relate two records with a predefined relationship and establish a non-hierarchical relationship between them.

Managing hierarchical relationships

Hierarchies show how records are related to one another. A hierarchy contains first-level nodes, child records, and relationships between the records.

For example, in the Supplier hierarchy, the PQR Internationals record is the first-level node. The hierarchy contains the John Smith record and a relationship from the PQR Internationals record to the John Smith record. The relationship shows that John Smith is a contact of PQR Internationals.

The hierarchical relationships that you can create depend on your hierarchy model.

Hierarchies page

Use the **Hierarchies** page to create, manage, and delete hierarchies. The page displays active, draft, and pending hierarchies and groups the hierarchies based on the hierarchy model.

You can also filter to view your draft hierarchies only.

The following image shows a sample Hierarchies page:

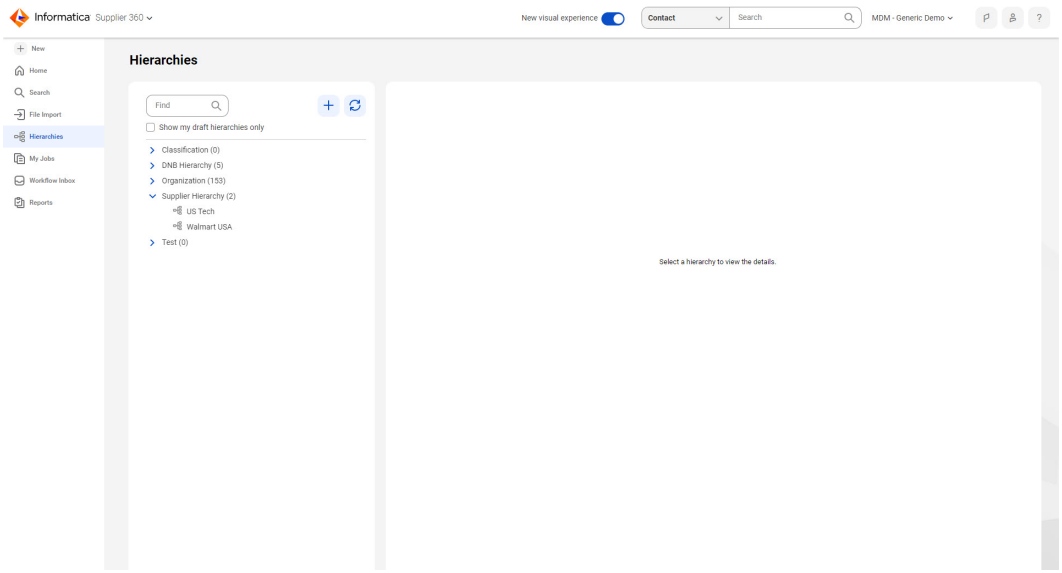

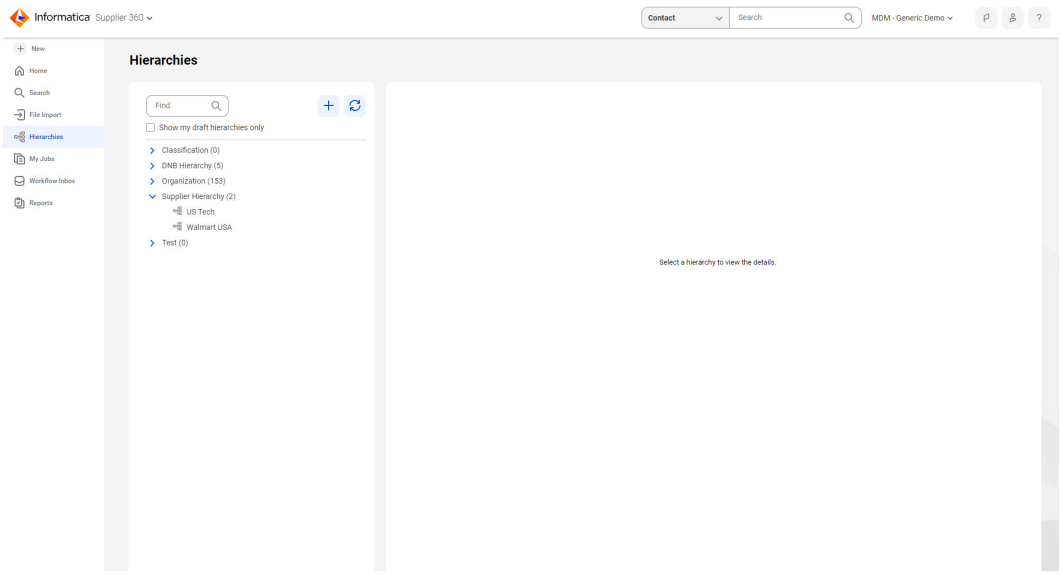

Hierarchy tab

Use the **Hierarchy** tab of a record to view the hierarchies a record belongs to. The page displays active, draft, and pending hierarchies and groups the hierarchies based on the hierarchy model.

You can also view the child and parent records in the hierarchy.

The following image shows a sample Hierarchy tab:

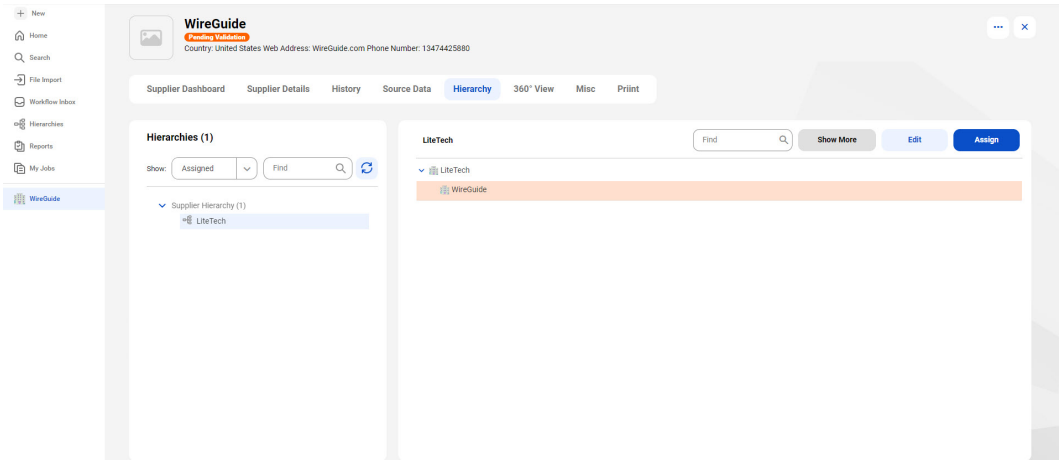

Note: The panels that display on the Hierarchy tab of a record might be different based on your role.

Creating and configuring a hierarchy

Create a hierarchy and add first level nodes. Then, add child records to define parent-child relationships in the hierarchy. You can also define attribute values to provide more information about relationships.

The hierarchy that you create is a draft. When you submit your draft, the hierarchy is published or sent for approval based on your configuration. If your changes trigger an approval workflow, a hierarchy task is created and available for review.

To create a hierarchy, perform the following steps:

1. Create a hierarchy.
2. Add first-level nodes.
3. Add and manage child records.
4. Define relationship attribute values.

Step 1. Create a hierarchy

Create a hierarchy to show hierarchy relationships between records. For example, you might create the Supplier hierarchy to show a relationship from the PQR Internationals record to the John Smith record.

1. Click **New** > **Hierarchy**.
2. Select the hierarchy model you want to base your hierarchy on, and then click **Create**.

   Note: The administrator configures the hierarchy models. Contact your administrator to request changes to your hierarchy models.

   The **New Hierarchy** dialog box appears.
3. Enter a name, and click **Create**.

   The hierarchy page appears.

Step 2. Add first-level nodes

Find and select the records that you want to use as first-level nodes.

1. On the hierarchy page, click **Add First Level Nodes**.

   The **Add First Level Nodes** dialog box appears.

2. Find and select the records you want to define as first-level nodes, and then click **Select**.

   The records appear on the page.

Step 3. Add and manage child records

Add child records to the hierarchy to define parent-child relationships between records. You can add additional child records or manage existing records by moving or removing a record. When you are done, submit the draft hierarchy.

Note: When you add child records, ensure that you don't create cyclic relationships where a record becomes a child to itself, resulting in a loop.

1. On the hierarchy page, hover over a record, and click **Add**.

   The **Add Child Record** wizard appears.
2. Select the record type that you want to add, and click **Next**.
   For example, select **Supplier**.
3. Select the relationship type that you want to add, and click **Next**.
   For example, select **Supplier to Contact**.
4. Find and select the related records that you want to add, and then click **Next**.
5. Enter relationship attributes if any.

   Note: If you select multiple related records, the attribute values apply to all the selected records.
6. Click **Add**.

   The record is added as a child record of the selected record.
7. Optionally, perform the following actions.

Action	Description
Add a child record	Hover over the record for which you want to add a child record, and click **Add**. Find and select a record that you want to add.
Remove a record	Hover over the record that you want to remove, click **Remove**, and then confirm the action.

8. Submit your draft hierarchy.

Action	Description
Submit	Based on your configuration, if no approval is required, the submit action is available. When you submit the hierarchy is published.
Send for Approval	Based on your configuration, if an approval is required or optional, the send for approval action is available. When you send for approval, a hierarchy task is created and available for approvers to review.

Step 4. Define relationship attribute values (Optional)

You can define attribute values of relationships to provide more information about relationships.

Your administrator configures the attributes that are available for relationships.

For example, your administrator defines a Status attribute for the relationship between the Supplier to Contact business entities. Then in Supplier 360 SaaS, you can specify that the status of the PQR Internationals to John Smith relationship is Active.

1. Select a node in the hierarchy tree.

   The relationships panel refreshes to show the child and parent relationships of the record.

2. In the relationships panel, hover over the relationship that you want to define an attribute value for, and then click **More Options** > **Edit**.

   The relationship properties panel appears.

3. In the attribute field, enter a value.

   The attribute fields available depend on your configuration.

4. Click **Apply**.

   The attribute value of the relationship appears in the relationships panel.

Viewing hierarchies

You can view hierarchies that appear on the **Hierarchies** page. You can also view the hierarchy of a record at a specific point in time to investigate its constitution at that time. By default, the current hierarchy appears on the **Hierarchies** page. You can also sort and filter the records in the hierarchies.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.

2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated with the hierarchy model appear.

3. Select the hierarchy that you want to view.

   The hierarchy properties appear. If you don't have access to the hierarchy, you can't expand the hierarchy.

4. Click **Open**.

   The hierarchy appears on a tab.

5. To view the details of a record, click a record.

   The following tabs appear:

   - Child Records. Displays the child records and their relationships with the selected record.
   - Parent Records. Displays the parent records and their relationships with the selected record.
   - Dynamic Field Definitions. Displays the dynamic field definitions of the selected record. You can add, remove, and configure the dynamic field definitions. For more information about dynamic field definitions, see *Manage Records*.

6. Optionally, for a hierarchical record, filter the child and parent records that appear on the relationships list panel.

   a. Click the **Filter** icon.

   b. From the **Add Filter** list, select to filter by record type, relationship type, or relationship attributes.

      The filtered relationship records appear in the relationships list panel. If you don't have access to the records, you can't see the parent and the child records.

7. To sort records that appear in the relationships list panel, click the column that you want to sort on, such as **Record** or **Relationship**.

8. To view the hierarchy at a specific point in time, in the **Point in Time** field, select the date and time.

   The hierarchy at the specified point in time appears.

Adding a record to a hierarchy

You can add records to a hierarchy as hierarchical relationships important to your organization change.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.
2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated with the hierarchy model appear.
3. Select the hierarchy to which you want to add a record, and click **Open**.

   The hierarchy appears in a tab.
4. Hover over the record to which you want to add a record, and click **Add**.

   The **Add Child Record** wizard appears.
5. Select the record type that you want to add, and click **Next**.
6. Select the relationship type that you want to add, and click **Next**.
7. Find and select the record that you want to add, and then click **Next**.
8. Enter relationship attributes if any.

   Note: If you select multiple related records, the attribute values apply to all the selected records.
9. Click **Add**.

   The record is added as a child record of the selected record in the hierarchy.
10. Submit your draft hierarchy.

Action	Description
Submit	Based on your configuration, if no approval is required, the submit action is available. When you submit the hierarchy is published.
Send for Approval	Based on your configuration, if an approval is required or optional, the send for approval action is available. When you send for approval, a hierarchy task is created and available for approvers to review.

Removing a record from a hierarchy

You can remove records from a hierarchy as hierarchical relationships important to your organization change.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.
2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated with the hierarchy model appear.
3. Select the hierarchy from which you want to remove a record, and click **Open**.

   The hierarchy appears in a tab.
4. Hover over the record that you want to remove, and click **Remove**.

   The **Remove Records** dialog box appears.
5. If you selected a record that has no child records, confirm the action.

6. If you selected a record that has child records, select an option, and then confirm the action.

Option	Description
Remove the records only	Removes the record from the hierarchy, but the child record associations aren't removed from the record.
Remove the records and all its child records and relationships	Removes the record from the hierarchy. Also, each child record that's directly or indirectly associated with the record that you remove from the hierarchy is removed and becomes an independent record.

7. Submit your draft hierarchy.

Action	Description
Submit	Based on your configuration, if no approval is required, the submit action is available. When you submit the hierarchy is published.
Send for Approval	Based on your configuration, if an approval is required or optional, the send for approval action is available. When you send for approval, a hierarchy task is created and available for approvers to review.

Assigning records to hierarchy nodes

You can organize records by assigning them to appropriate hierarchy nodes. Assign a record to place it in any hierarchy by selecting the appropriate parent node within the hierarchy.

You can assign a record to multiple nodes within a hierarchy or in another hierarchy. You can also unassign records from hierarchy nodes.

Before you assign a record, you can view the hierarchies to which the record is assigned or not assigned.

Note: Your administrator configures the hierarchy settings and the privileges that you require to assign or unassign records from hierarchy nodes.

1. Open a record that you want to assign to a hierarchy node.
2. Click the **Hierarchy** tab.
3. To filter the list of hierarchies, select one of the following options in the **Show** list:
   - **All**. Displays all the hierarchies.
   - **Assigned**. Displays the hierarchies to which the record is assigned. By default, the hierarchies to which the record is already assigned appear.
   - **Unassigned**. Displays the hierarchies to which the record is not assigned.
4. Click the hierarchy to which you want to assign the record.

   The hierarchy opens in the right pane.
5. Click **Assign**.
6. Select the nodes to which you want to assign the record.
7. Click **Submit**.

Moving hierarchy records

You can move records within a hierarchy or to another hierarchy. The records that you move might have child records. You can move the record along with its child records or remove the child record associations from the record before the move.

Moving a record within a hierarchy

To move a record within the same hierarchy, drag the record from one location to the other. When you move a record from one location to another, the child records of the record also move along with the record. Hierarchy attribute values are retained when you move a record within the same hierarchy. If the relationship type is not valid, you can't move the record. You can't move a record if the target record has no compatible relationship type with the record that you move.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.
2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated with the hierarchy model appear.
3. Select the hierarchy from which you want to move a record, and click **Open**.

   For example, open the Email hierarchy.

   The hierarchy appears in a tab.

   The following image shows the Email hierarchy:

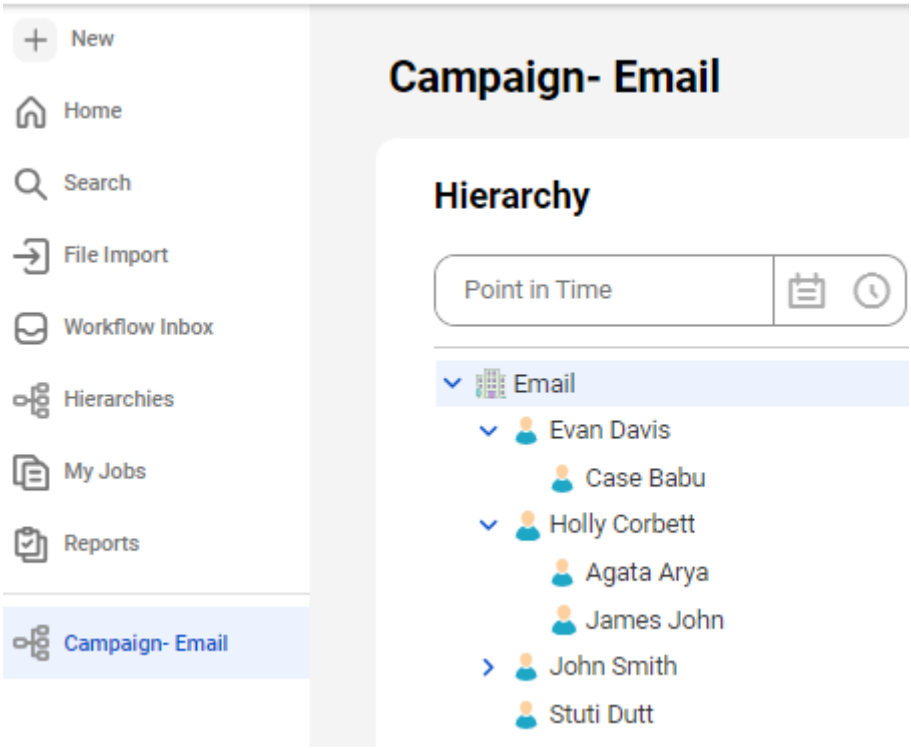

4. To move a record, drag the record to the desired location within the hierarchy.

   The hierarchy record is updated.

5. Click **Submit**.

   If a workflow is configured, the change is sent for approval.

Moving records between hierarchies

You can move a record from one hierarchy to another by removing the record from the hierarchy and adding the record to the location you prefer within another hierarchy.

To move a record from one hierarchy to another, perform the following tasks:

1. "Removing a record from a hierarchy" on page 205
2. "Adding a record to a hierarchy" on page 205

Example: Moving records between hierarchies

To move a record from one hierarchy to another, remove the record from the hierarchy and add the record to the location you prefer within another hierarchy.

In this scenario you have two Campaign hierarchies Email and Phone. You want to move the Holly Corbett record from the Email hierarchy to the Phone hierarchy. The Holly Corbett record has child records Agata Arya and James John. You can move the record with or without its child records. The following image shows the Email and Phone hierarchies and highlights the Holly Corbett record that you want to move:

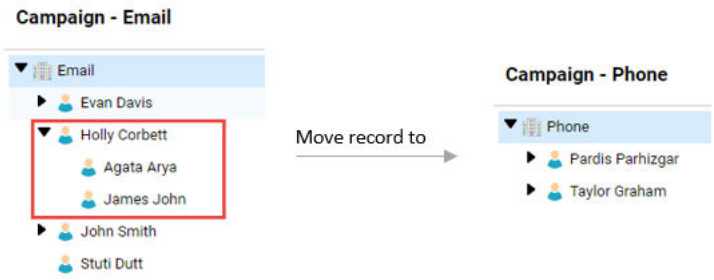

The following table describes the move actions for Holly Corbett and their outcomes:

Move Action	Steps to Move a Record	Outcome
Move the Holly Corbett record with its child records	1. Remove the record from the Email hierarchy. Ensure that you select **Remove record only**. 2. Add the record to the Phone hierarchy.	The Holly Corbett record is removed from the Email hierarchy, but the child record associations aren't removed from the record. After the move, Holly Corbett and its child records appear in the Phone hierarchy. The following image shows the Campaign hierarchies after the Holly Corbett record is moved: 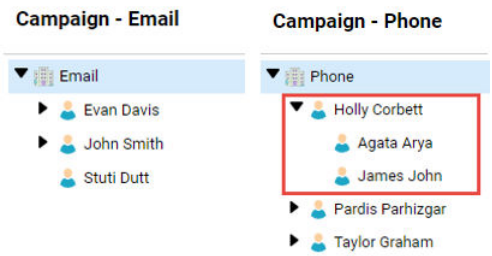
Move the Holly Corbett record without its child records	1. Remove the record from the Email hierarchy. Ensure that you select **Remove record and all its child records and relationships**. 2. Add the record to the Phone hierarchy.	The Holly Corbett record is removed from the Email hierarchy. Also, the child record associations are removed from the Holly Corbett record. After the move, Holly Corbett appears in the Phone hierarchy without its child records. The following image shows the Campaign hierarchies after the Holly Corbett record is moved: 

You can encounter the following scenarios while moving a record between hierarchies:

- Moving a record that has no child records
- Moving a record with its child records
- Moving a record without its child records

Example: Moving a record that has no child records between hierarchies

To move a hierarchy record that has no child records, remove the record from the hierarchy. Then, add the removed record to the location you prefer in another hierarchy.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.
2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated with the hierarchy model appear.
3. Select the hierarchy from which you want to move a record, and click **Open**.

   For example, open the Email hierarchy.

The hierarchy appears in a tab.

The following image shows the Email hierarchy:

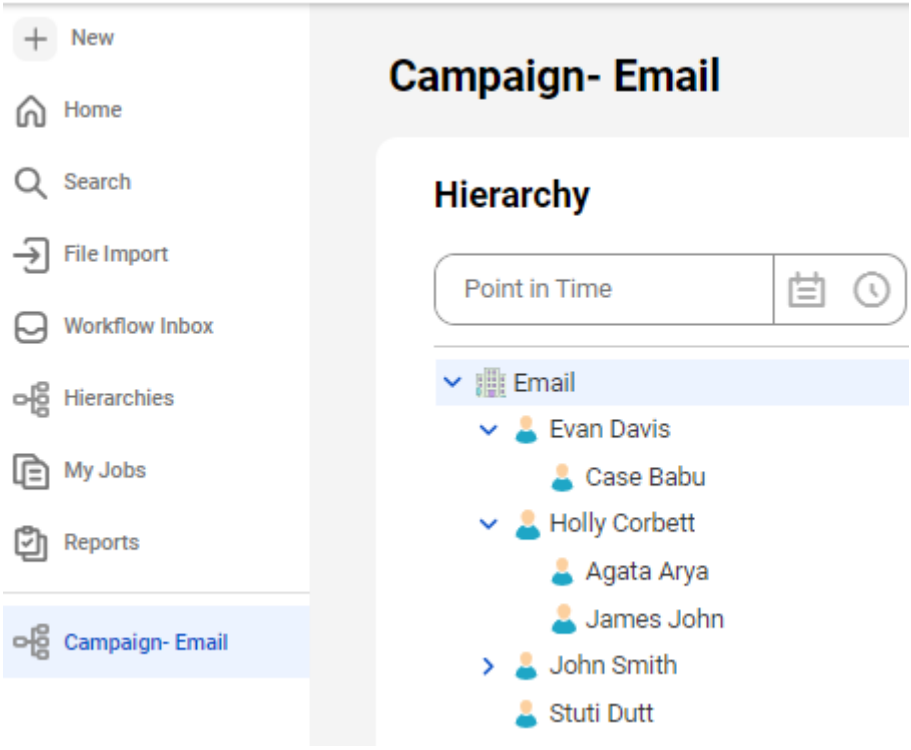

4. Hover over the record that you want to move, and click **Remove**.

   For example, remove the Stuti Dutt record.

   The **Remove Records** dialog box appears.

   The following image shows the Remove Records dialog box:

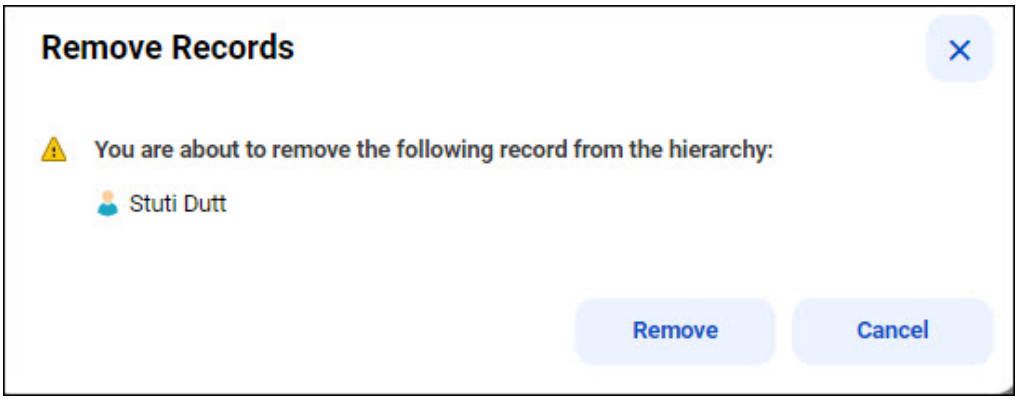

5. Click **Remove**.

   The record is removed from the hierarchy.

6. Select the hierarchy to which you want to move the record, and click **Open**.

   For example, open the Phone hierarchy.

   The hierarchy appears in a tab.

The following image shows the Phone hierarchy:

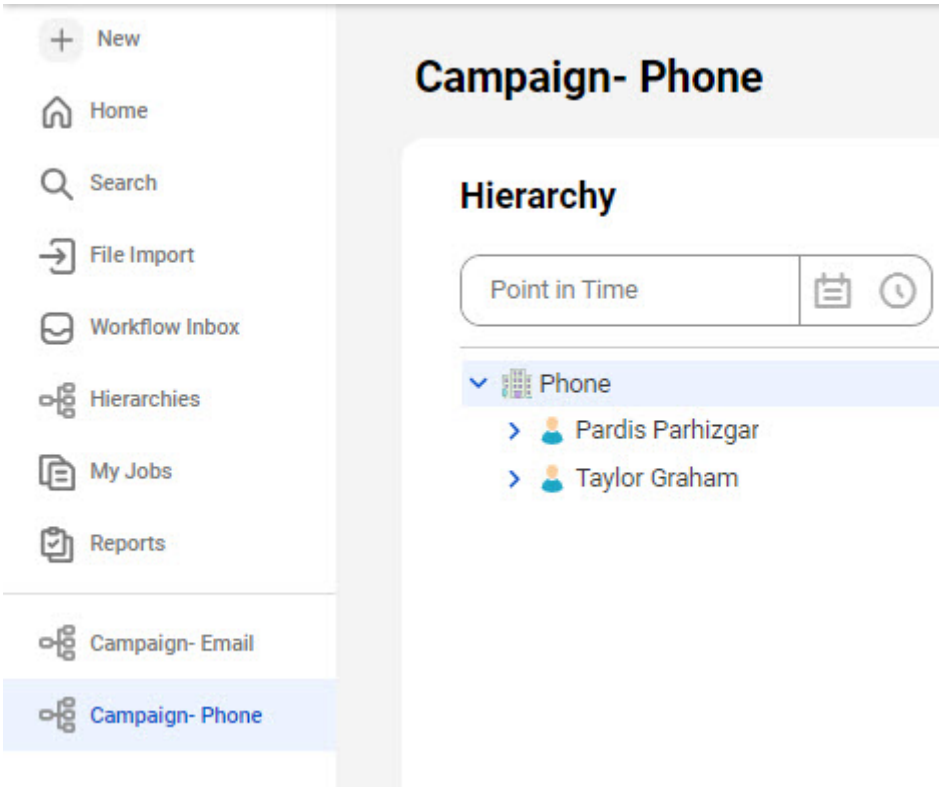

7. Hover over the record to which you want to move the removed record, and click **Add**.
   The **Add Child Record** wizard appears.
8. Select the record type that you want to add, and click **Next**.
9. Select the relationship type that you want to add, and click **Next**.
10. Find and select the record that you want to move, and then click **Next**.
    The following image shows the Add Child Record wizard with the record to move selected:

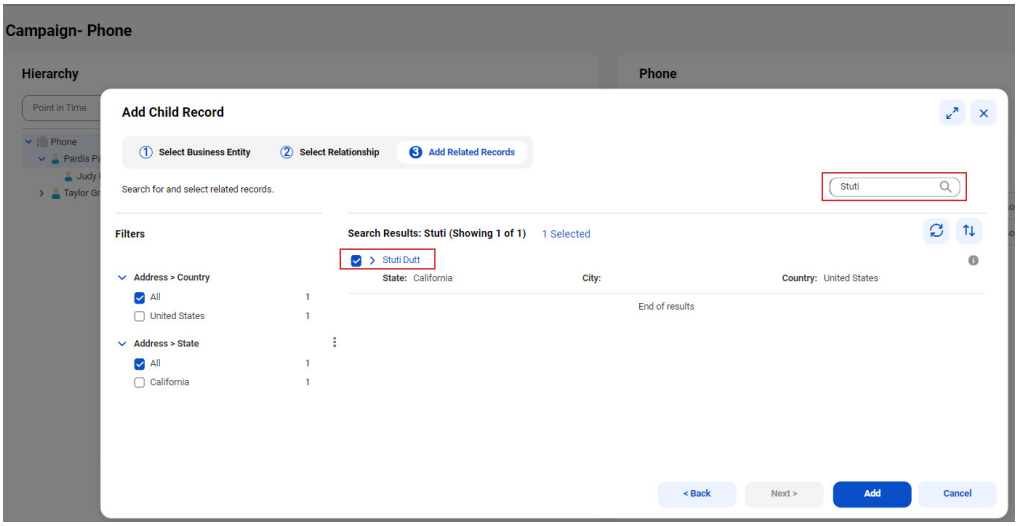

11. Enter relationship attributes if any.

Note: If you select multiple related records, the attribute values apply to all the selected records.

12. Click **Add**.

    The record is moved as a child record of the selected record in the hierarchy.

    The following image shows the Phone hierarchy with the moved record Stuti Dutt:

Example: Moving a record with its child records between hierarchies

To move a hierarchy record with its child records, remove the record from the hierarchy without removing the child record associations from the record. Then, add the removed record to the location you prefer in another hierarchy. The record moves along with the child records associated with it.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.

2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated with the hierarchy model appear.

3. Select the hierarchy from which you want to move a record, and click **Open**.

   For example, open the Email hierarchy.

   The hierarchy appears in a tab.

   The following image shows the Email hierarchy:

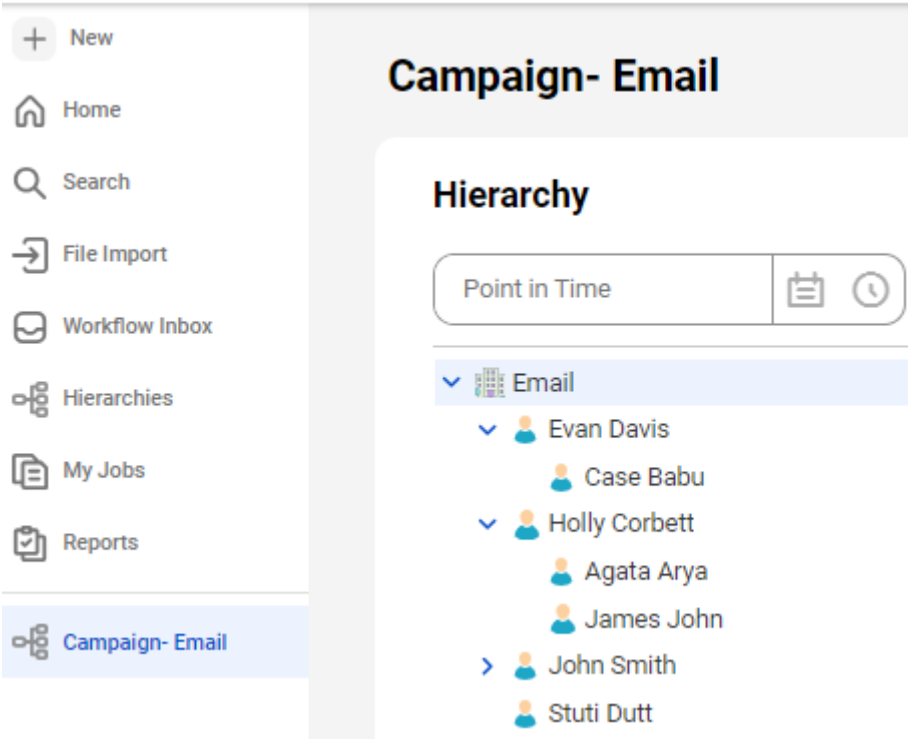

4. Hover over the record that you want to move, and click **Remove**.

   For example, remove the Holly Corbett record.

   The **Remove Records** dialog box appears.

   The following image shows the Remove Records dialog box:

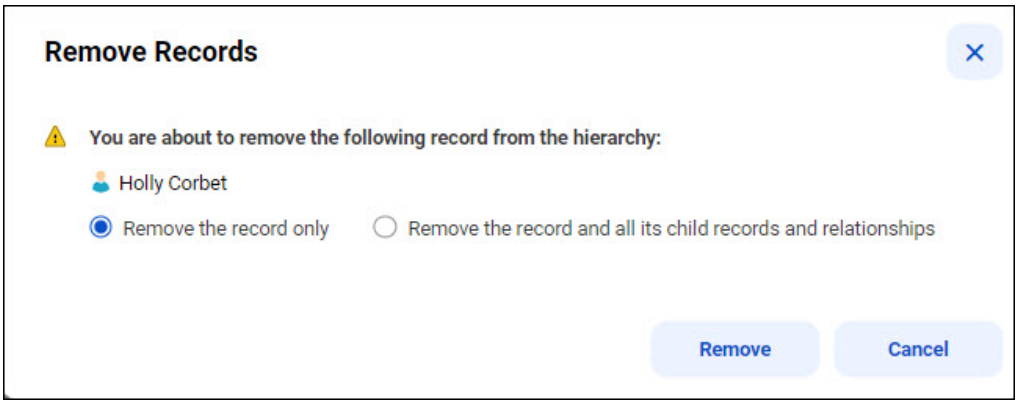

5. Select **Remove the records only** and then click **Remove**.

   The record is removed from the hierarchy, but the child record associations aren't removed from the record.
   For example, Holly Corbett is removed from the Email hierarchy, but the child record associations, Agata Arya and James John aren't removed from Holly Corbett.

6. Select the hierarchy to which you want to move the record, and click **Open**.

   For example, open the Phone hierarchy.

   The hierarchy appears in a tab.

The following image shows the Phone hierarchy:

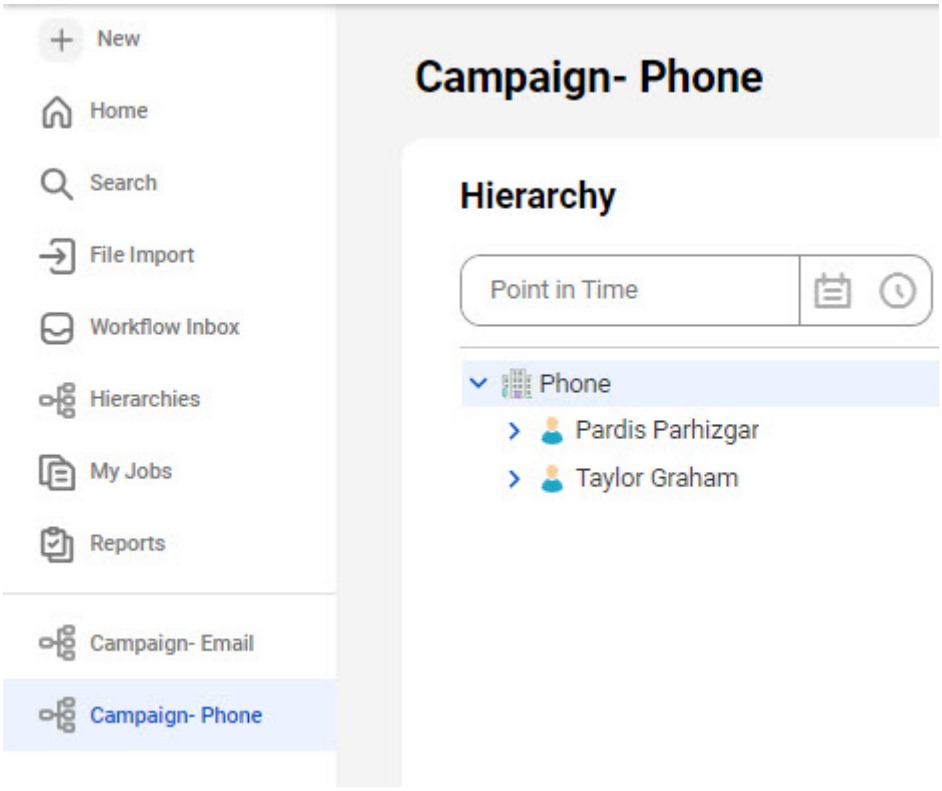

7. Hover over the record to which you want to move the removed record, and click **Add**.

   The **Add Child Record** wizard appears.
8. Select the record type that you want to add, and click **Next**.
9. Select the relationship type that you want to add, and click **Next**.
10. Find and select the record that you want to move, and then click **Next**.

    The following image shows the Add Child Record wizard with the record to move selected:

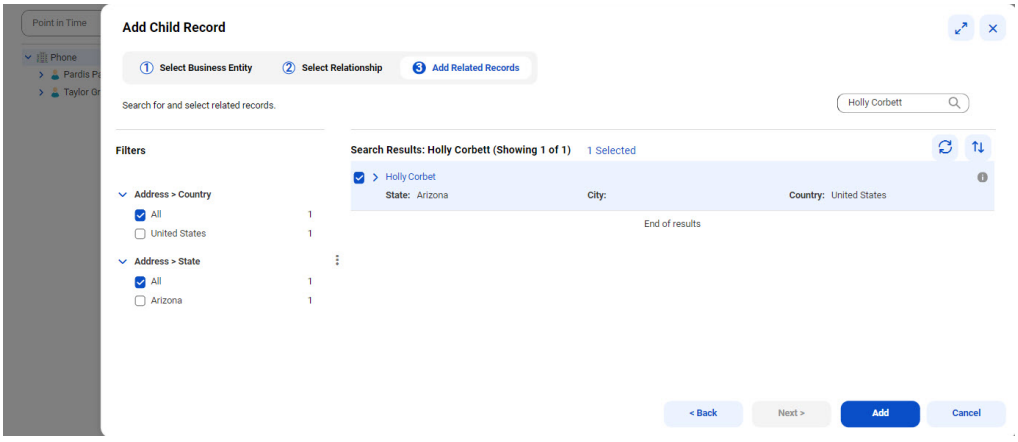

11. Enter relationship attributes if any.

    Note: If you select multiple related records, the attribute values apply to all the selected records.

12. Click **Add**.

    The record is moved as a child record of the selected record in the hierarchy.

    The following image shows the Phone hierarchy with the moved record Holly Corbett along with its child records Agata Arya and James John:

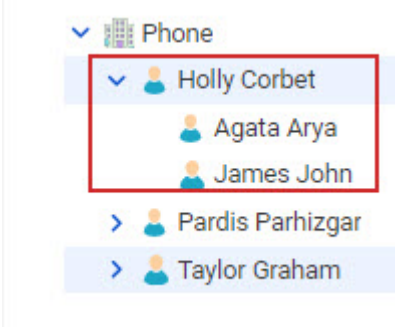

Example: Moving a record without its child records between hierarchies

To move a hierarchy record without its child records, remove the record from the hierarchy. Ensure that you opt to remove the child record associations from the record. Then, add the removed record to the location you prefer in another hierarchy. The record moves without the child records that were associated with it.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.
2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated with the hierarchy model appear.
3. Select the hierarchy from which you want to move a record, and click **Open**.

   For example, open the Email hierarchy.

   The hierarchy appears in a tab.

The following image shows the Email hierarchy:

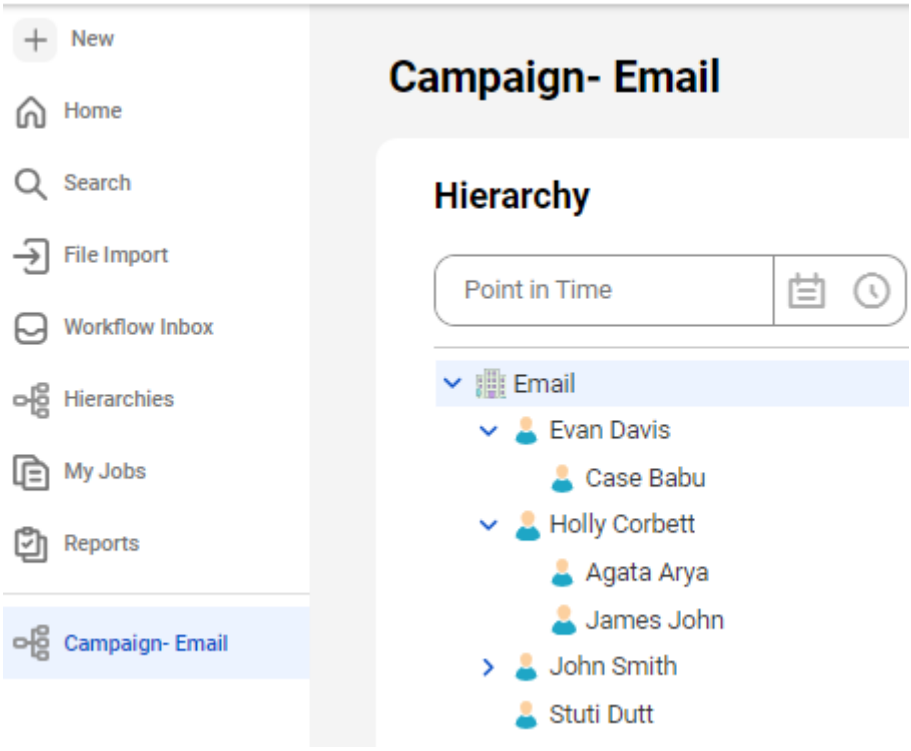

4. Hover over the record that you want to move, and click **Remove**.

   For example, remove the Holly Corbett record.

   The **Remove Records** dialog box appears.

   The following image shows the Remove Records dialog box:

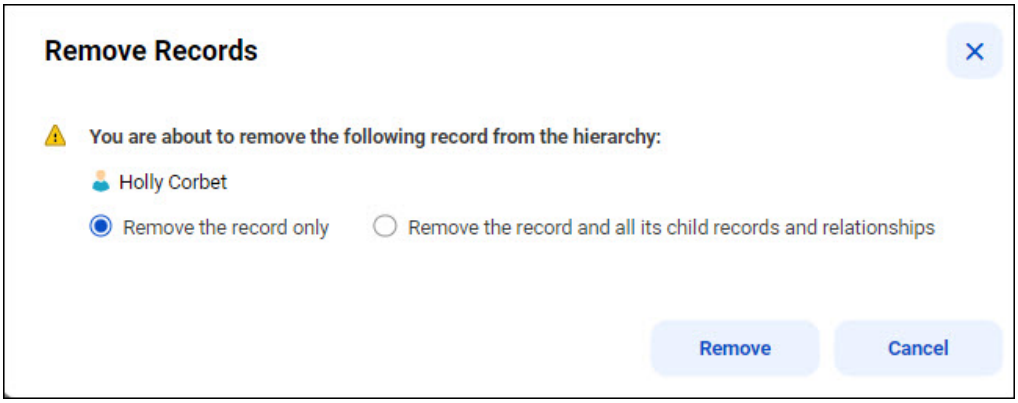

5. Select **Remove the records and all its child records and relationships** and then click **Remove**.

   The record is removed from the hierarchy. Also, each child record that's directly or indirectly associated with the record that you remove from the hierarchy is removed and becomes an independent record. For example, Holly is removed from the Email hierarchy. Also, the child record associations Agata Arya and James John are removed from Holly Corbett.

6. Select the hierarchy to which you want to move the record, and click **Open**.

   For example, open the Phone hierarchy.

The hierarchy appears in a tab.

The following image shows the Phone hierarchy:

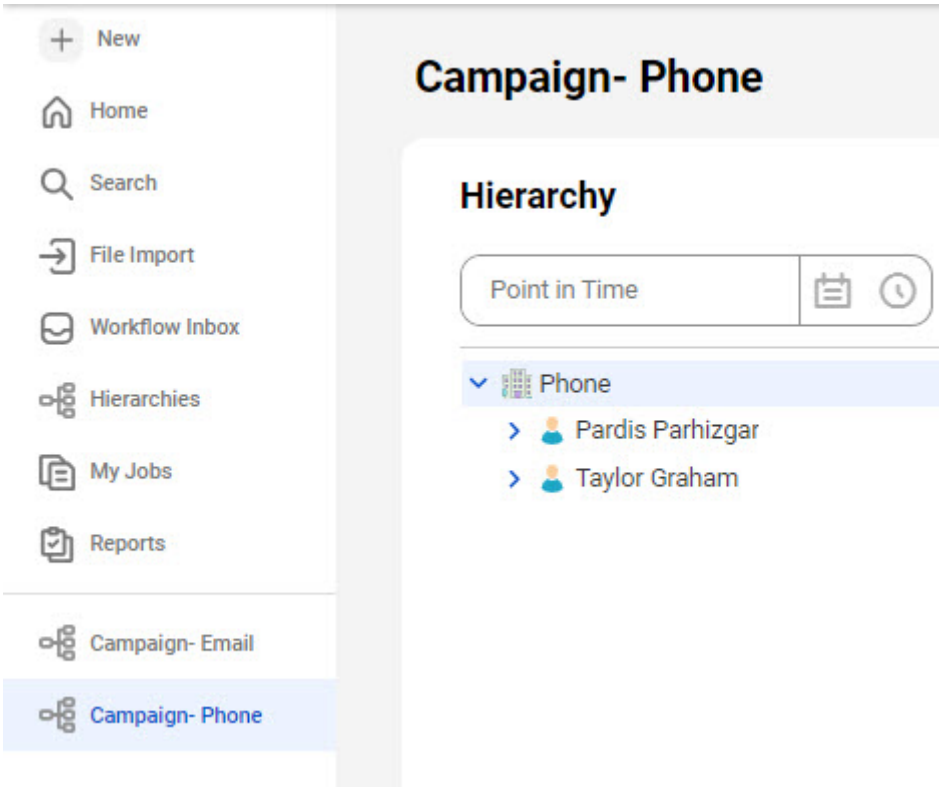

7. Hover over the record to which you want to move the removed record, and click **Add**.
   The **Add Child Record** wizard appears.
8. Select the record type that you want to add, and click **Next**.
9. Select the relationship type that you want to add, and click **Next**.
10. Find and select the record that you want to move, and then click **Next**.
    The following image shows the Add Child Record wizard with the record to move selected:

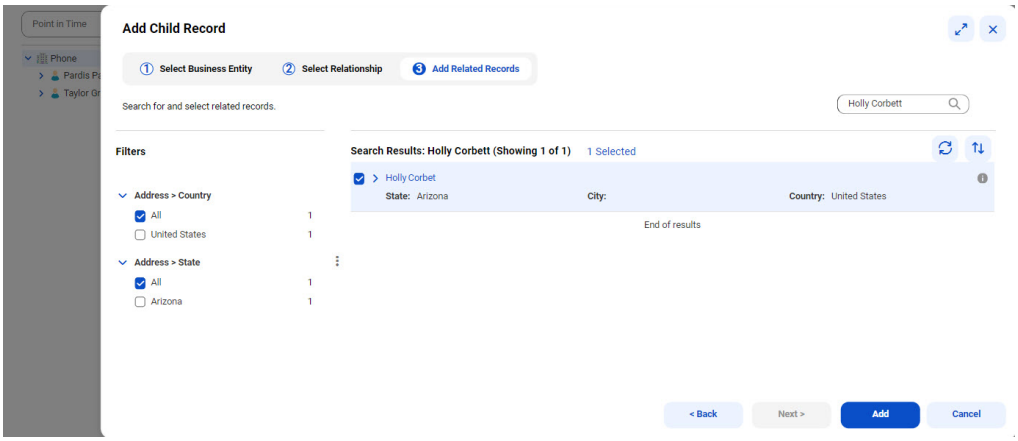

11. Enter relationship attributes if any.

Note: If you select multiple related records, the attribute values apply to all the selected records.

12. Click **Add**.

    The record is moved as a child record of the selected record in the hierarchy.

    The following image shows the Phone hierarchy with the moved record Holly Corbett, but without the child records Agata Arya and James John:



Deleting a hierarchy

Delete hierarchies that you no longer need.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.

2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated to the hierarchy model appear.

3. Select the hierarchy that you want to delete.

   The hierarchy properties appear.

4. Click **Delete**.

   The **Delete Hierarchy** dialog box appears.

5. Delete the hierarchy.

Action	Description
Delete	Based on your configuration, if no approval is required, the delete action is available. When you delete the hierarchy is removed.
Send for Approval	Based on your configuration, if an approval is required or optional, the send for approval action is available. When you send for approval, a hierarchy task is created and available for approvers to review.

Editing hierarchy properties

Edit the name or description of a hierarchy.

1. Click **Hierarchies**.

   The **Hierarchies** page appears.

2. Expand the hierarchy model to which the hierarchy is associated.

   The hierarchies associated to the hierarchy model appear.

3. Select the hierarchy that you want to edit.

   The hierarchy properties appear.

4. Click **Edit Properties**.

5. Edit the name or description.
6. Submit your draft hierarchy.

Action	Description
Submit	Based on your configuration, if no approval is required, the submit action is available. When you submit the hierarchy is published.
Send for Approval	Based on your configuration, if an approval is required or optional, the send for approval action is available. When you send for approval, a hierarchy task is created and available for approvers to review.

Refreshing hierarchies

To view a new hierarchy or changes to a hierarchy, you must refresh the hierarchy. Also, if your configuration includes an approval workflow, you must refresh a hierarchy to view the changes and the associated status, such as draft and pending.

- To refresh the hierarchies on the **Hierarchies** page, click **Refresh** in the hierarchies panel.

Managing non-hierarchical relationships

A non-hierarchical relationship is a relationship between records that are related by a predefined relationship or a business entity record field.

When you relate records with a predefined relationship, the records in the relationship can belong to the same business entity or different business entities. For example, you can create a spousal relationship between two records that belong to the Person business entity. You can also create an employee relationship between a Person business entity record, such as John Smith, and an Organization business entity record, such as Informatica.

Records related with a relationship

Two business entity records can be related with a relationship. The records can belong to the same business entity or different business entities.

You can view and manage related records on the record details page or on a relationship graph.

The following image shows a sample relationship graph:

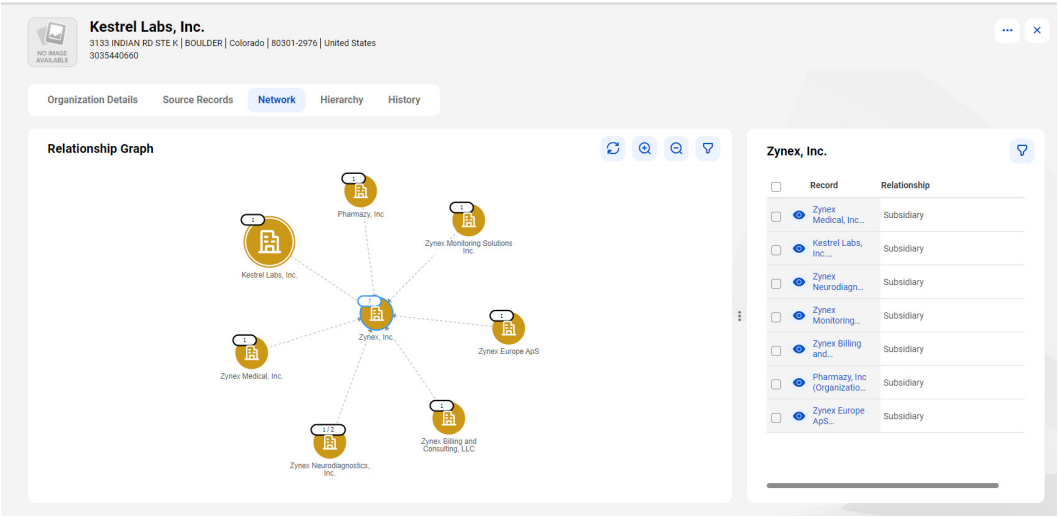

The following image shows a sample relationship table:

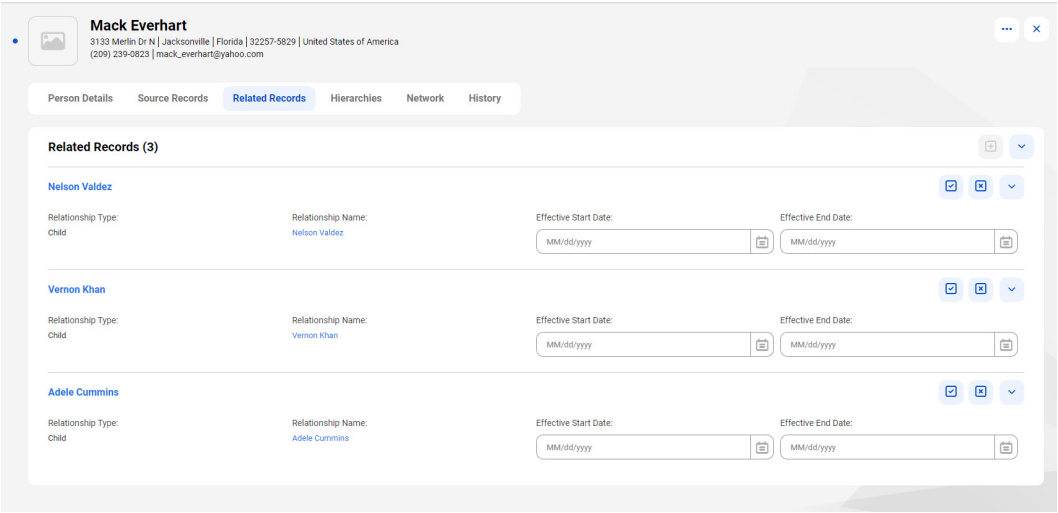

Relating a record with a relationship

Based on the business entity to which the record belongs, you can use the relationships that the business entity participates in.

1. Open a record for which you want to create a relationship.

   The **Record Details** page appears.

2. In the **Related Records** section, click **Add Related Record**.

   The **Add Related Record** dialog box appears.

3. Select the relationship type to create.

4. If the relationship type is between two records of the same business entity and is bidirectional, select the direction in which you want to relate records, and click **Next**.

   Note: If the relationship type is unidirectional, the relationship direction value appears in the read-only mode. Similarly, if the relationship type is between two different business entities and is bidirectional, the relationship direction value appears in the read-only mode.

5. Search for the records that you want to define a relationship to.
6. Select the records and click **Add**.

   The related record appears in the **Related Records** section.
7. Optionally, if the relationships have fields for additional information, specify the information, and apply the changes.
8. Save your changes.

Action	Description
Submit	If no approval is required, the submit action is available. When you submit, the changes are published.
Send for Approval	If approval is required or optional, the send for approval action is available. When you send for approval, a task is created and available for approvers to review.

Viewing related records on a relationship graph

You can view related records on the **Relationship Graphs** page. You can also filter the relationships.

1. Open a record for which you want to view the relationship graph.

   The **Record Details** page appears.
2. To view the relationship graph, click the **Relationship Graph** tab.

   The relationships and their primary attributes for the record appear. Based on the configuration, a certain number of relationship nodes appear.
3. To progressively explore and visualize the relationships, click the relationship nodes.
4. To view the properties of a relationship between two nodes, click the connector between the nodes.
5. To limit or view selective relationships, filter the business entities or relationships on the graph canvas.
   a. Click the **Filter** icon.

      The **Filter Relationships** dialog box appears.
   b. From the **Business Entities** table, select the business entities for which you want to show relationships on the relationship graph.
   c. To show record labels, select **Show record labels**.
   d. From the **Relationships** table, select the relationships to show on the relationship graph.
   e. To show relationship labels, select **Show relationship labels**.
   f. To hide hierarchical relationships from the relationship graph, clear **Show hierarchical relationships**.

      By default the **Show hierarchical relationships** check box is selected, and the hierarchical relationships appear on the relationship graph.
   g. Click **Save**.

      The filtered relationship graph appears.
6. Optionally, filter the records that appear on the relationships list panel by relationship attribute.
   a. Click the **Filter** icon.
   b. From the **Add Filter** list, select the relationship attributes to filter by. The filtered relationship records appear in the relationships list panel.
7. Optionally, select a relationship attribute column header to sort based on a relationship attribute.

8. Optionally, select a relationship node and show or hide relationships on the relationship graph canvas from the relationships list panel.
   - To show a relationship, click the **Show on Canvas** icon.
   - To hide a relationship, click the **Hide on Canvas** icon.
9. Optionally, filter the records that appear on the relationships list panel by record type, relationship type, and record visibility on the relationship graph canvas.

Records related with a business entity record field

Records related with a business entity record field refer one record to another or group multiple records through multiple business entity record fields. For example, a person record can relate to an organization record through a business entity record field named Current Employer. You can group records from the Course, College, Student business entities through a business entity named Group.

You can view and manage records that are related with business entity record fields in a table.

The following image shows records related with business entity record fields:

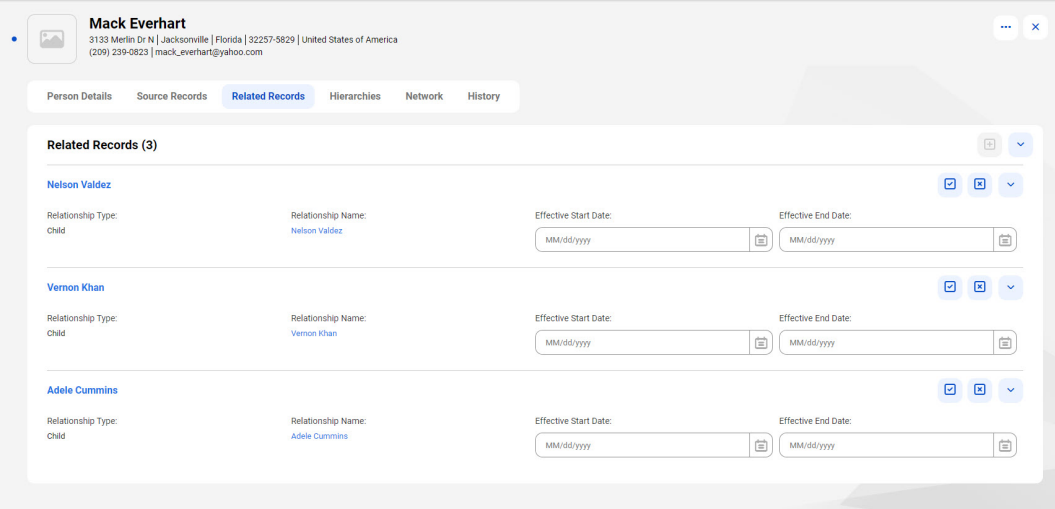

Managing records that are related with business entity record fields

You can view, add, edit, and delete records that are related with business entity record fields. The related records appear in a table.

To filter the related records, apply a predefined filter or a custom condition. If the record contains only one business entity record field relationship, the predefined filter option doesn't appear.

Note: To avoid entering invalid dates, use the date picker. If you enter a date in an invalid format, the related records table might not render correctly.

If you receive a permission error, contact your administrator to upgrade Supplier 360 SaaS to the latest version.

1. Open a record for which you want to view related records, and then go to the related records table.
2. To filter the records based on a predefined filter, select a business entity record field from the **Filter** list.

   The table shows the records that match the selected business entity record field.

3. To open a record related with business entity record fields in a separate page, perform the following steps:
   a. Hover over the row of the record you want to view.
   b. Click the **Actions** menu, and select **View Record**.

      The selected record opens in a separate page.
4. To filter records based on a custom condition, perform the following steps:
   a. Click the **Filter** icon.
   b. Click **Add Condition**.
   c. Select a field and then an operator for the condition.
   d. Enter the value.
   e. To add another filter, click **Add Condition**, and repeat steps 4.b. through 4.d.

      You can add multiple fields in each condition.
   f. Click **Apply**.

   The following image shows a record and its related records filtered based on a condition:

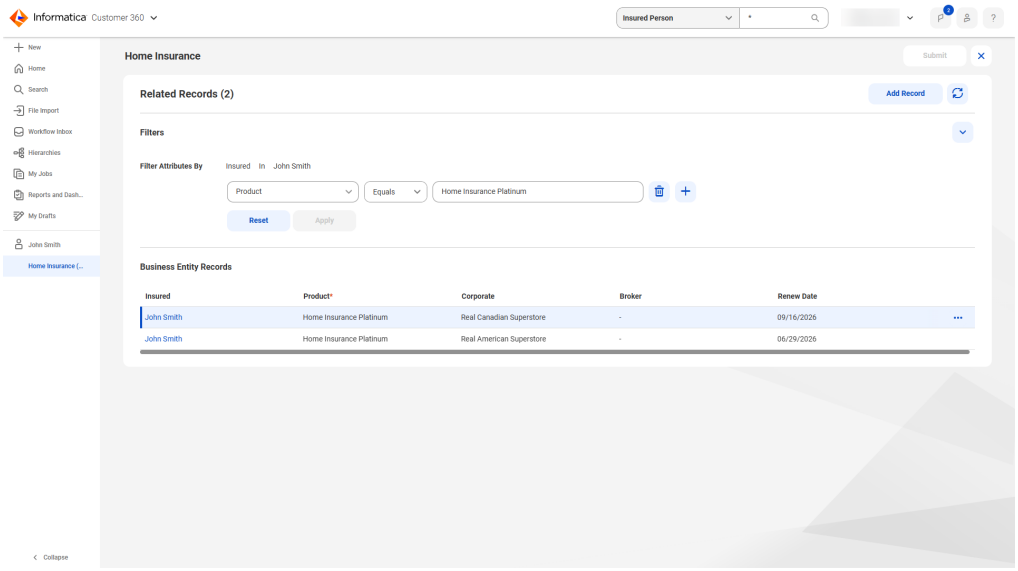

5. To add, edit, or delete related records, click **Edit**.

   A temporary workspace opens with the options to add records, edit the fields in records, or delete records.
6. To add a related record, perform the following tasks:
   a. Click **Add Record**.
   b. Enter values for the required fields.

      When you add a related record, its business entity record field is automatically filled with the record to which you're adding the related record. If the new related record has multiple business entity record fields, only the field that the predefined filter uses is filled.

      For example, the predefined filter shows related records that contain the John Smith record in the Insured business entity record field. When you add a related record, the Insured field in the new related record is automatically filled with the John Smith record.

The following image shows the Insured field automatically filled in with John Smith on the new Home Insurance record:

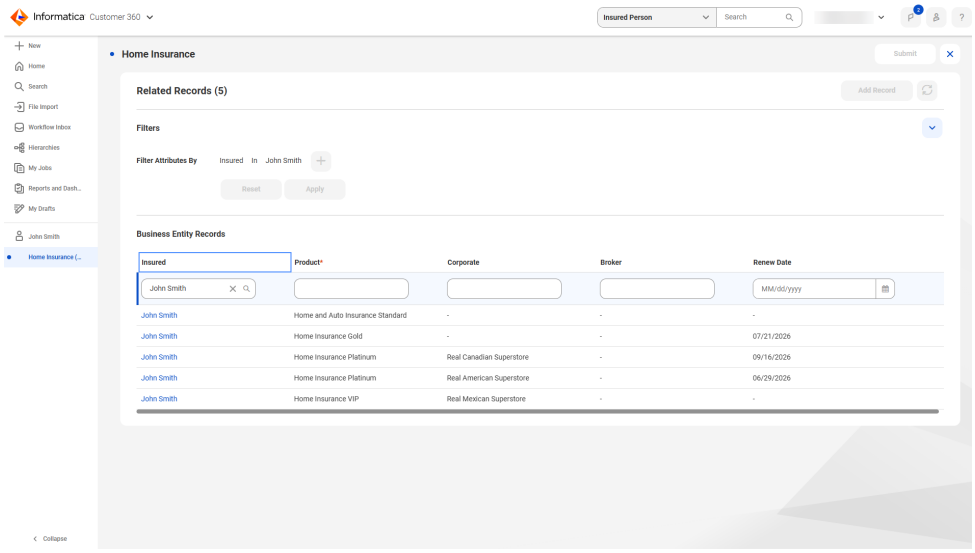

c. Click **Apply**.

   A related record is created.

7. To edit a related record, perform the following tasks:
   a. Hover over the row of the record you want to edit.
   b. Click the **Actions** menu, and select **Edit**.
   c. Edit the fields that you want to change.
   d. Click **Apply**.
8. To delete a related record, perform the following tasks:
   a. Hover over the row of the record you want to delete.
   b. Click the **Actions** menu, and select **Delete**.

      A confirmatory message appears.

   c. Click **Delete**.

      The relationship to the related record is deleted.
9. Click **Submit**.

   If the updated records don't require approval, the changes are published.
10. If approval is required, send the changes for approval.

    If approval is optional, you can choose whether you want to send the changes for approval.

    If any of the updated records for which you added, edited, or deleted related records require approval, the application creates **Record Updated** tasks when you send these records for approval.

CHAPTER 9

Manage tasks and tickets

When users create, update, or delete data in Supplier 360 SaaS, the changes can trigger an approval workflow. A workflow can consist of one or multiple linked approval tasks that relevant stakeholders need to review and approve before the data becomes master data.

As a stakeholder, you can view all your assigned review tasks in one of the following inboxes:

- Task inbox.

  For more information about the task inbox, see "Review tasks in the task inbox" on page 238.

  You can also use the ticket manager to view tickets associated with workflows in which you are a stakeholder. A ticket tracks all the completed tasks related to an update that triggered the workflow.

  For more information about the ticket manager, see "View tickets in the ticket manager" on page 247.

  : Effective in the April 2026 release, the ability to view tasks in the task inbox and tickets in the ticket manager is available for preview.

  Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.
- Workflow inbox.

  For more information about the workflow inbox, see "Review tasks in the workflow inbox" on page 225.

Review tasks in the workflow inbox

When a user changes data in Supplier 360 SaaS, the change might trigger an approval workflow. The workflow might consist of one or multiple approval tasks linked together.

The approvers of the task must review and approve the data before it becomes master data.

If your changes trigger a workflow, you can't view the approval task. Also, you can't approve your changes, even if you are assigned the approver role.

Note: Tasks created after the November 2023 release will expire after 365 days if they are inactive or unattended, and they will be deleted three days after expiration. Tasks created before the November 2023 release will not expire even if they are inactive or unattended.

Also, approvers can choose to send tasks back to a previous step in the workflow. Tasks that approvers send back move through the approval workflow again.

For example, as the second approver for an updated record, you can either send the task back to the task originator or the first approver. If you send the task back to the originator, the originator can either edit the record details and submit the record for review again or reject the changes. If the originator submits the record for review, the first approver can approve or reject the changes. If the first approver approves the changes, then the second approver can approve or reject the changes.

When you send a new or updated hierarchy task back to the originator, the originator can edit the hierarchy before sending the hierarchy for review again. But when you send new records, updated records, and deleted hierarchy tasks back to the originator, the originator cannot edit the asset before submitting the asset for review again.

Viewing tasks

You can view tasks on the Workflow Inbox page. The Workflow Inbox page displays the list of tasks that requires action.

As an approver, you might want to sort and find tasks that you want to approve in the workflow inbox. For example, to review tasks based on priority or status, you can sort tasks based on priority or status, and then claim the task. You can't sort tasks by creator.

1. Open the **Workflow Inbox** from the left navigation pane.

   By default, the tasks appear in the List view where you can view the details of each task in the workspace.

   The following image shows the List view:

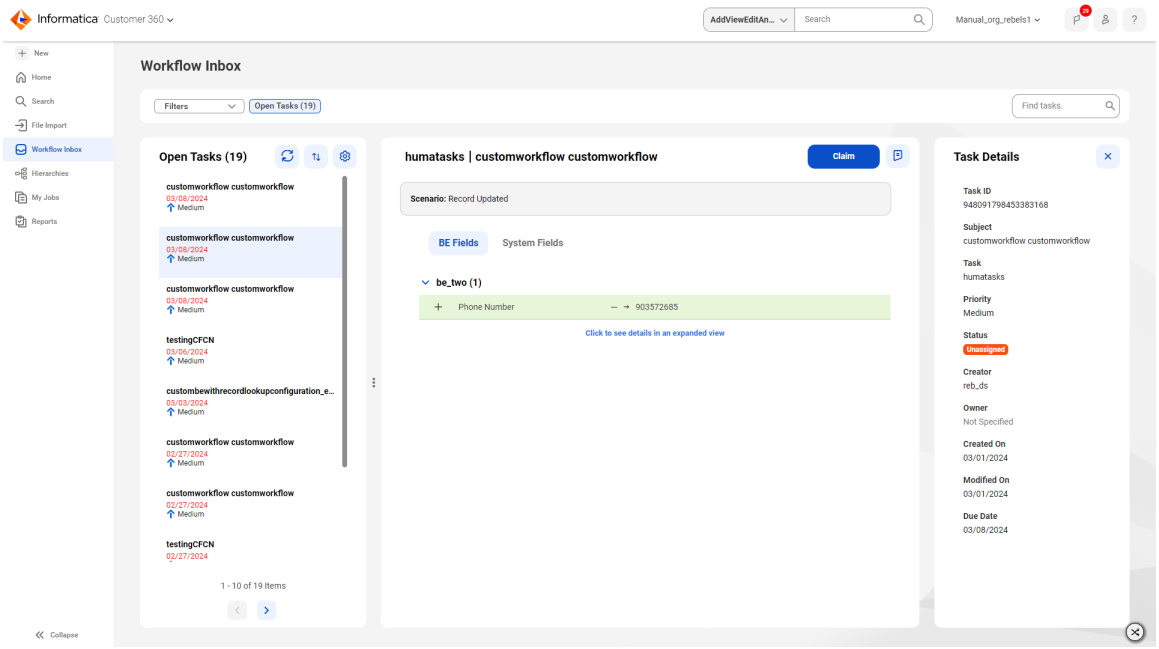

   The following image shows the Grid view:

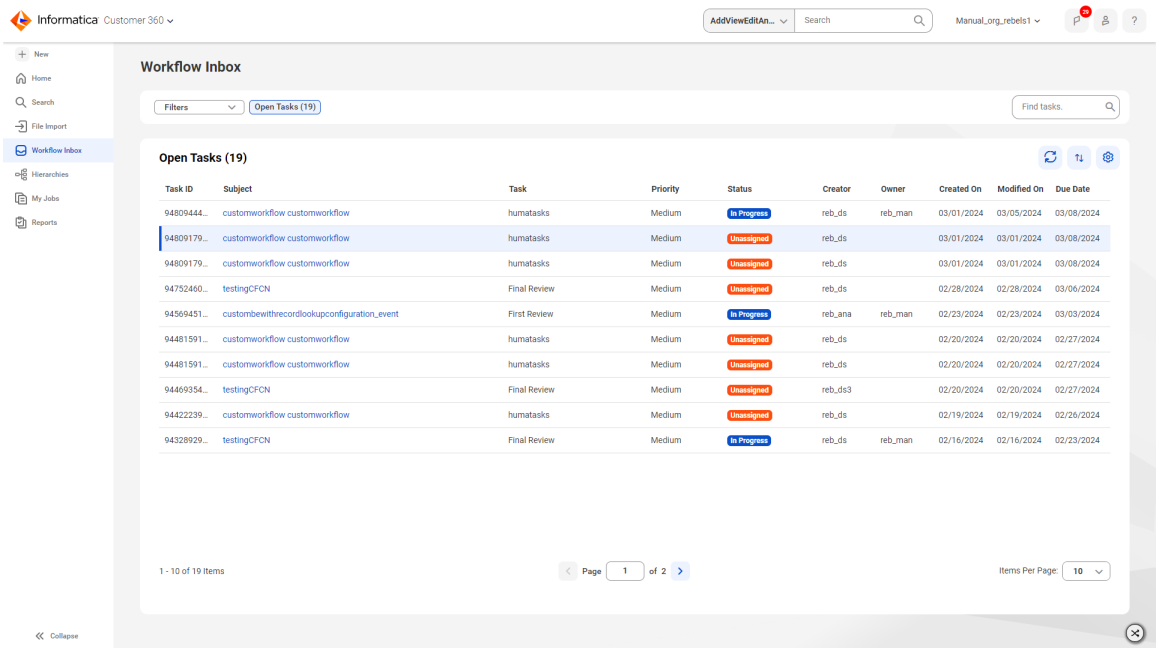

2. To view the details of a task, click the task.

   The task details appear in a panel of the Workflow Inbox page.

3. Optionally, click **Select List View or Grid View** icon to change the view.

Filtering and sorting tasks

You can use the predefined filters to filter tasks that your user role has access to on the Workflow Inbox page. By default, open tasks that aren't assigned to any user are filtered, and you can claim these tasks. You can also sort tasks based on task details, such as task ID, priority, and due date.

In the grid view, you can sort tasks by task ID, subject, task, priority, status, owner, created date, modified date, and due date. In the list view, you can sort tasks by subject, due date, and priority.

The following table describes the predefined filters you can use on the Workflow Inbox page:

Filter	Description
Unassigned Tasks	Filters tasks that aren't assigned.
My Tasks	Filters tasks that are assigned to you and also those that are claimed by you.
Active Tasks	Filters tasks that are assigned to you, but not closed.
Closed Tasks	Filters tasks that you worked on and are now closed.
Open Admin Tasks	Filters all the open tasks that your user role has access to, and you can claim the unassigned tasks. These tasks can be in progress, unassigned, or assigned.
My Stakeholder Tasks	Available in the new experience. Reserved for future use.

Filter	Description
Due In 7 Days	Filters tasks that are due in seven days.
Due In 14 Days	Filters tasks that are due in 14 days.
Due In More Than 14 Days	Filters tasks that will be due after 14 days.
Past Due	Filters tasks that are already past the due date.
Created within 7 days	Filters tasks that were created within the last seven days.
Created within 14 days	Filters tasks that were created within the last 14 days.
Created earlier than 14 days ago	Filters tasks that were created earlier than 14 days.
Modified within 7 days	Filters tasks that were modified within the last seven days.
Modified within 14 days	Filters tasks that were modified within the last 14 days.
Modified earlier than 14 days ago	Filters tasks that were modified earlier than 14 days.
Priority High	Filters high priority tasks.
Priority Medium	Filters medium priority tasks.
Priority Low	Filters low priority tasks.

Claiming a task

To review a task, you must claim the task. After you claim a task, other users can't work on it.

1. Click **Workflow Inbox**.

   The **Workflow Inbox** page appears.

2. Click **Filters** > **Unassigned Tasks**.

   The list of unassigned task appears.
   The following image shows the list of unassigned tasks:

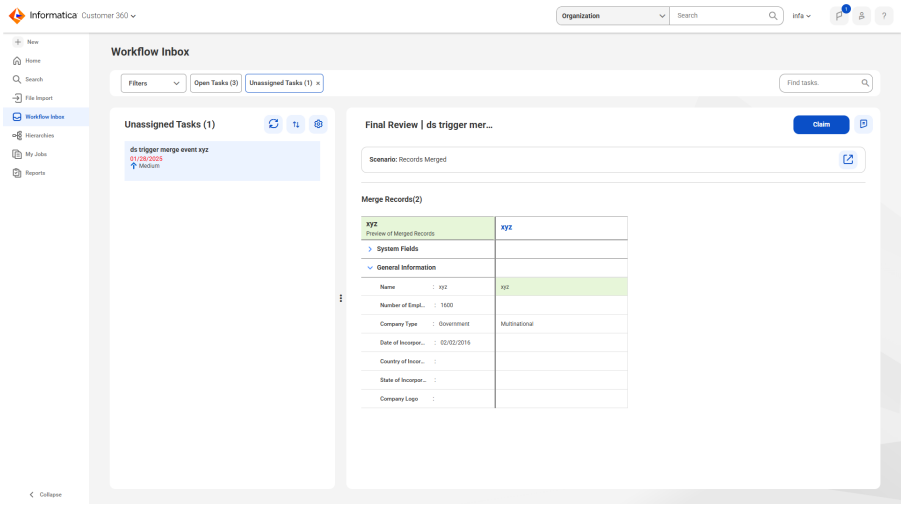

3. Select a task that you want to claim.
4. Click **Claim**.

Resolving a task

You resolve a task by reviewing the new or changed record and then taking an action. The possible actions depend on the workflow configured for the business event.

Tasks that aren't approved or rejected expire and become invalid 365 days after creation.

Depending on the configured workflow, approvers can choose to send tasks back to a previous step in the workflow. Tasks that approvers send back move through the approval workflow again.

For example, as the second approver for an updated record, you can either send the task back to the task originator or the first approver. If you send the task back to the originator, the originator can either edit the record details and submit the record for review again or reject the changes. If the originator submits the record for review, the first approver can approve or reject the changes. If the first approver approves the changes, then the second approver can approve or reject the changes.

When you send a new or updated hierarchy task back to the originator, the originator can edit the hierarchy before sending the hierarchy for review again. But when you send new records, updated records, and deleted hierarchy tasks back to the originator, the originator cannot edit the asset before submitting the asset for review again.

Reviewing a new record

Review all fields in the new record to ensure that the record is acceptable.

To review a task, you must first claim the task.

You can review and edit dynamic field values in the edit mode of approval tasks. You can also compare changes to dynamic field values with the existing ones. However, you can't compare or make changes to dynamic field definitions.

1. On the **Workflow Inbox** page, from the **Filters** list, select **My Tasks**.

   The **My Tasks** tab appears and displays your open tasks.
2. To review a task, click the task title.

   The associated record opens in a tab.

3. If you see a typographical error or an incorrect value, click **Edit**, edit the field, and then click **Save**.
4. To resolve the task, click an appropriate action.

Action	Description
Approve	If the record is acceptable, click **Approve**.
Reject	If you disagree with one or more values, click **Reject**.

5. To send back the task or return the task to the pool of unassigned tasks, perform an appropriate action.

Action	Description
Send Back	To send the task back to a prior workflow step, click **Send Back**. Select the user to which you want to send the task.
Release	To return the task to the pool of unassigned tasks, click **Release**.

Reviewing an edited record

Review edited records to ensure that the changes are correct. The fields or related records with updates are highlighted.

To review a task, you must first claim the task.

Note: If the Default source system has a lower source ranking than other contributing source systems, the changes don't appear in the record that was updated in Supplier 360 SaaS. However, you can view the changes on the source records page in the associated patch record. You can approve the task, but the changes don't appear in the master record.

1. On the **Workflow Inbox** page, from the **Filters** list, select **My Tasks**.

   The **My Tasks** tab appears and displays your open tasks.
2. To review a task, click the task.
3. If you see a typographical error or an incorrect value, click **Edit** to make the correction, and then click **Save**.
4. If you don't see any updated field values, click to see details in an expanded view, and then click the **Source Records** tab.
5. To resolve the task, perform an appropriate action.

Action	Description
Approve	If you agree with the edits, click **Approve**.
Reject	If you disagree with one or more of the edits, click **Reject**.

6. To send back the task or return the task to the pool of unassigned tasks, perform an appropriate action.

Action	Description
Send Back	To send the task back to a prior workflow step, click **Send Back**. Select the user to which you want to send the task.

Action	Description
Release	To return the task to the pool of unassigned tasks, click **Release**.

Reviewing records to resolve duplicates

To resolve duplicate records, review the matching records in a merge task. The matching records are potential duplicates of a record.

To review a task, first claim the task.

Note: You can't view record pairs in merge tasks. To view record pairs of a record, open the record, and then click View Record Pairs on the Source Records page.

The task displays a preview of the merged record. Review the matching records and the values that they contribute to the merged record.

The preview of the merged record displays the surviving values from the contributing records. These values are selected based on trust scores and survivorship criteria, so they might not be the values that you consider the best version of the truth. If you want a different value, you can override a surviving value with a value from another contributing record in the merge task.

For more information about survivorship, see Establish the best version of truthEstablish the best version of truth..

1. On the **Workflow Inbox** page, from the **Filters** list, select **My Tasks**.

   The **My Tasks** tab appears and displays your open tasks.
2. To review a task, click the task title.

   A preview of the records appears.
3. To open the task in a larger workspace to review records to merge, click the **Open Task In New Tab** icon.

   The task opens in a workspace and displays the matching records.
4. To review contributing source records, click the **Show Source Records** icon on the record header row of the target record.

   The target record is the preview of the new master record that's created after your approval.
5. To determine whether a matching record is a correct match, compare each matching record with the target record.
6. If required, select the appropriate label for each matching record on the record header row.

Label	Description
Match	Indicates that the record is a duplicate. The record will be merged with the target record.
Not a Match	Indicates that the record is not a duplicate. The record will never match with the target record.
Not Sure	Indicates that you are not sure of whether the record is a duplicate. The record will not be merged but can appear as a matching record of the target in a new merge task.

7. If you changed labels, click **Apply**.

8. Optionally, override field values or field group values in the merge task.
   a. Select the field value or field group that you want to override.

      If a field group is configured for deduplication, you can only override a whole field group entry. If the field group isn't configured for deduplication, you can override the field group values in the same way as general information fields.

   b. Select **Override Surviving Value**.

   c. In the confirmation dialog box, review the values to override, and click **Override**.

      The selected field value or field group value overrides the field value or field group value in the merge task.
      The fields that were overridden display an override indicator with the message **Overridden**.

   Overriding field values in the merge task doesn't change the overrides in the contributing records before they are merged.

9. Optionally, remove an overridden field value or field group value.
   a. Hover over the field value or field group that was overridden.

   b. Select **Actions** > **Remove Preview Override**.

      The trust score is recalculated to identify the field value or field group values with the highest trust score. The values with the highest trust score contribute to the preview of the new master record. The override indicator disappears.

10. Optionally, ignore all overrides for a field from contributing records.
    a. Hover over the field value or field group that was overridden.

    b. Select **Actions** > **Ignore Merge Candidates Overrides**.

       If you override a field value in the merge preview, select the option **Remove Merge Candidate and Preview Overrides** instead. This option also removes the override that you applied in the merge task.

11. To determine whether to merge the records, review the values in the **Merged Record Preview** column.
12. To resolve the task, click an appropriate action button.

Action	Description
Approve	If you want to merge the records that are matches, click **Approve**.
Reject	If you do not want to merge the records, click **Reject**. The records can appear as a matching record of the target in a new merge task.

13. To send back the task or return the task to the pool of unassigned tasks, perform an appropriate action.

Action	Description
Send Back	To send the task back to a previous workflow step, click **Send Back**. Select the user that you want to send the task to. If you are not an approver, don't send the task back to a previous workflow step.
Release	To return the task to the pool of unassigned tasks, click **Release**.

Reviewing source records to unmerge from a master record

Review the source records to unmerge from a master record. The source records to be unmerged are selected. You can preview the master records that will be created after the source records are unmerged from the original master record.

To review a task, you must first claim the task.

1. On the **Workflow Inbox** page, from the **Filters** list, select **My Tasks**.

   The **My Tasks** tab appears and displays your open tasks.
2. To review a task, click the task title.

   A preview of the records appears.
3. To open the task in a larger workspace to review records to merge, click the **Open Task In New Tab** icon.

   The task opens in a workspace and displays the matching records.
4. Ensure that the correct source records are selected for unmerging from the master record.
5. Preview the master records that will be created after the source records unmerge.

   The master records that will be created appear on separate tabs next to the Original Master Record tab.
6. To resolve the task, click an appropriate action button.

Action	Description
Approve	If you want to unmerge the selected source records, click **Approve**.
Reject	If you do not want to unmerge the selected source records, click **Reject**.

7. To send back the task or return the task to the pool of unassigned tasks, perform an appropriate action.

Action	Description
Send Back	To send the task back to a prior workflow step, click **Send Back**. Select the user to which you want to send the task.
Release	To return the task to the pool of unassigned tasks, click **Release**.

Reviewing a new hierarchy

Review new hierarchies to ensure that the hierarchy is acceptable.

1. On the **Workflow Inbox** page, from the **Filters** list, select **My Tasks**.

   The **My Tasks** tab appears and displays your open tasks.
2. To review a task, click the task title.

   The associated hierarchy opens in a tab.
3. If you identify a record that you want to add to or remove from the hierarchy, click **Edit**, edit the hierarchy, and then click **Save**.

4. To resolve the task, perform an appropriate action.

Action	Description
Approve	If the hierarchy is acceptable, click **Approve**.
Reject	If you disagree with one or more values, click **Reject**.

5. To send back the task or return the task to the pool of unassigned tasks, perform an appropriate action.

Action	Description
Send Back	To send the task back to a prior workflow step, click **Send Back**. Select the user to which you want to send the task.
Release	To return the task to the pool of unassigned tasks, click **Release**.

Reviewing an edited hierarchy

Review edited hierarchies to ensure that the changes are acceptable. The edited nodes are highlighted.

1. On the **Workflow Inbox** page, from the **Filters** list, select **My Tasks**.

   The **My Tasks** tab appears and displays your open tasks.

2. To review a task, click the task title.

   The associated hierarchy opens in a tab. The edited nodes are highlighted.

3. If you identify a record that you want to add to or remove from the hierarchy, click **Edit**, edit the hierarchy, and then click **Save**.

4. To resolve the task, perform an appropriate action.

Action	Description
Approve	If you agree with the edits, click **Approve**.
Reject	If you disagree with one or more of the edits, click **Reject**.

5. To send back the task or return the task to the pool of unassigned tasks, perform an appropriate action.

Action	Description
Send Back	To send the task back to a prior workflow step, click **Send Back**. Select the user to which you want to send the task.
Release	To return the task to the pool of unassigned tasks, click **Release**.

Reviewing a deleted hierarchy

Review deleted hierarchies to ensure that the deletion is acceptable.

1. On the **Workflow Inbox** page, from the **Filters** list, select **My Tasks**.

   The **My Tasks** tab appears and displays your open tasks.

2. To review a task, click the task title.

The associated hierarchy opens in a tab.

3. To resolve the task, perform an appropriate action.

Action	Description
Approve	If you agree with the deletion, click **Approve**.
Reject	If you disagree with the deletion, click **Reject**.

4. To send back the task or return the task to the pool of unassigned tasks, perform an appropriate action.

Action	Description
Send Back	To send the task back to a prior workflow step, click **Send Back**. Select the user to which you want to send the task.
Release	To return the task to the pool of unassigned tasks, click **Release**.

Viewing the status of closed tasks

You can view the action that you took on a closed task and its status in the overall workflow.

For example, you view a closed task for an update that's in a subsequent approval step. The task action appears as approved, and the workflow status appears as a review in progress.

The closed task displays one of the following task actions:

- Approved. Indicates that you approved the change.
- Rejected. Indicates that you rejected the change.
- Sent Back. Indicates that you sent back the change.

The closed task displays one of the following workflow statuses:

- Approved. Indicates that all reviewers approved the change.
- Rejected. Indicates that a reviewer rejected the change.
- Review In Progress. Indicates that a reviewer sent back the change or the approval process is in progress.

Finding tasks

You can find specific tasks from a list of filtered tasks.

You can find a task by specifying the task ID, subject, priority, owner, task, or status. The search isn't case sensitive.

For example, when you apply the Past Due filter and search by final review, all the tasks in the final review that are past due are filtered.

The following image shows the workflow inbox with the search box for finding tasks.

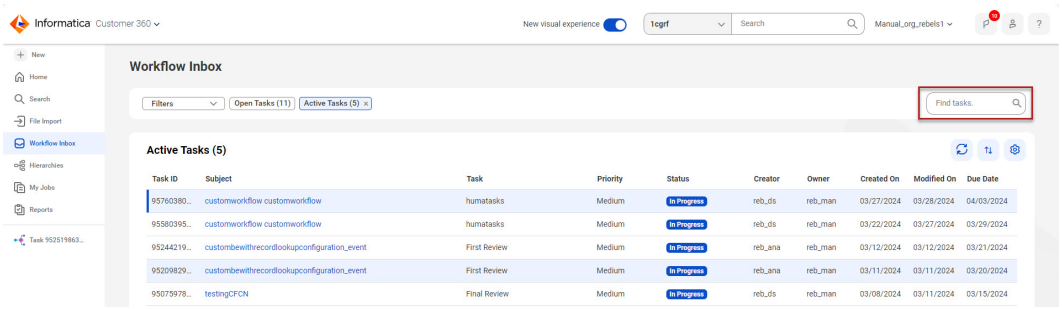

The following table describes the values that you can use to find tasks:

Value	Description
Task ID	ID of the task that you want to find.
Subject	Partial or full subject of the tasks that you want to find.
Priority	Numeric value associated with task priority. Use one of the following values: - 1. High priority - 2. Medium priority - 3. Low priority
Owner	Partial or full name of the task owner that you want to find.
Task	Name of the task that you want to find. The task can have one of the following values: - First Review - Originator Review - Final Review - humantasks
Status	Status of the task that you want to find. The status can have one of the following values: - CREATED - READY - RESERVED - IN_PROGRESS - SUSPENDED - COMPLETED - FAILED - ERROR - EXITED - OBSOLETE

Enrichment and validation in approval workflows

Rule associations for enrichment and validation run when you update records in approval workflows.

If your organization has approval workflows configured, rule associations for enrichment and validation work the same way as they do during record creation and updates.

Submitting records for approval

When a data steward submits records for approval, the rule associations configured to run on record submission enrich and validate the records. The results are applied and saved to the records. A business event then moves the records into the approval workflow, and a task is created in the Workflow Inbox.

Editing records from the Workflow Inbox

When you claim a task, edit a record, and apply changes to a section, rule associations configured to run during section save run on the record. The results appear in the section but aren't saved yet.

When you save the record, the rule associations run again, and the results are applied to the record that's in the pending state. The edits and the results remain in the pending record and are saved to the record only when you approve the record.

Resolving the task

The action that you take to resolve the task determines what happens to the record that's in the pending state:

- Approve. Saves the changes including edits and the results of rule associations to the record.
- Reject. Discards all edits and results of rule associations that ran when you click Save.
- Release. Returns the task to the pool of unassigned tasks. The record remains in the pending state with its edits and the results of rule associations. The user who claims the task next can view the changes.

Multi-step approval workflows

In a multi-step approval workflow, such as MDM Two Step Approval or MDM Four Step Approval, enrichment and validation repeat at each step. For example, after you approve a record, if the second user edits the record, rule associations run again when the user edits and saves the record.

CLAIRE recommendations

If your organization has rule associations configured to display enrichment data as recommendations, the recommendations appear in the CLAIRE panel after you apply changes to a section and save the record. You can accept or reject recommendations.

Review tasks in the task inbox

Specific actions on data can trigger a workflow. The workflow might consist of one or multiple tasks linked together.

Relevant stakeholders need to review and approve the data before it becomes master data. As a stakeholder, you can view all your assigned tasks in the task inbox.
Note: If your changes trigger a workflow, you can't view the approval task. Also, you can't approve your changes, even if you are assigned the approver role.

Task inbox

You can view and act on the tasks assigned to you in the task inbox.

The following image shows the task inbox:

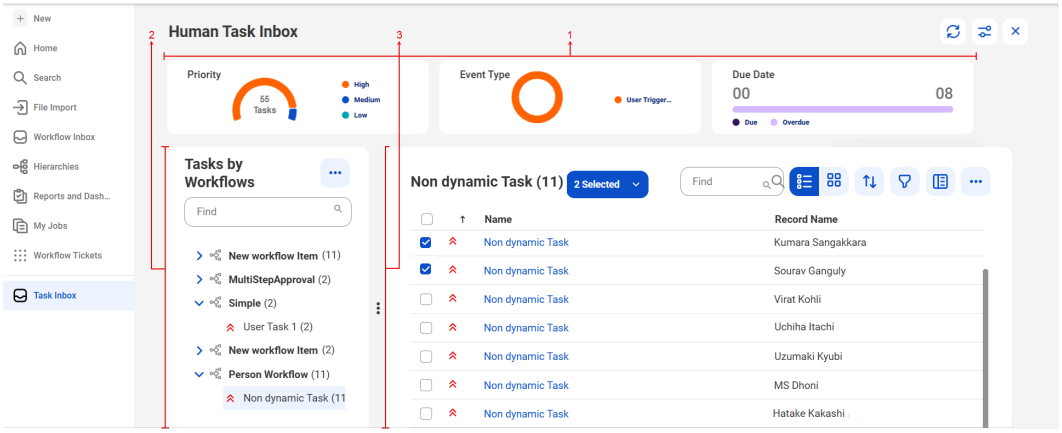

1. Overview. Graphical representation of your assigned task metrics, categorized by priority level, event type, and due date. You can hide the section if required.
2. Tasks by Workflows. List of workflows for which you're a stakeholder. By default, tasks are grouped by workflows.
3. List of tasks. Tasks related to the selected workflow.

You can perform the following actions on tasks:

- Claim, assign, or act on individual tasks or multiple tasks in bulk.
- Search for tasks based on task details and record details.
- Adjust the view by choosing between list and card views.
- Sort tasks in based on priority, event type, asset type, and due date.
- Filter tasks based on task details and record details.
- Adjust the columns displayed in the section. The Name column is always displayed. You can choose to view or hide other columns.

To view details of a single task, click the task. The details are displayed in a new workspace.

Assigning tasks

You can assign unclaimed tasks to a user or user role. You can also reassign claimed or assigned tasks to other users or user roles.

1. To assign a single task to a user or user role, click the **Assign** icon for the task in the task inbox.

   The following image shows the **Assign** icon:

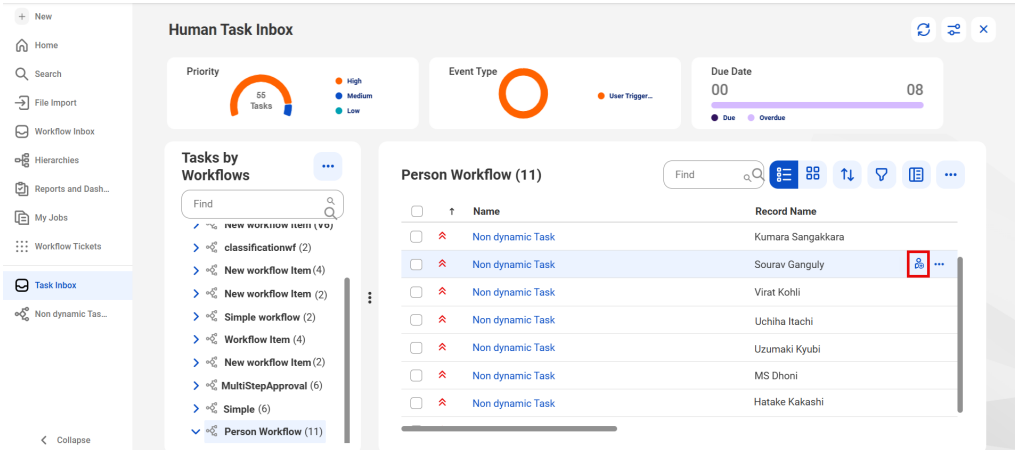

2. To assign multiple tasks to a user or user role, select the tasks and click **Bulk Actions** > **Assign** in the task inbox.

   The following image shows the **Bulk Actions** button:

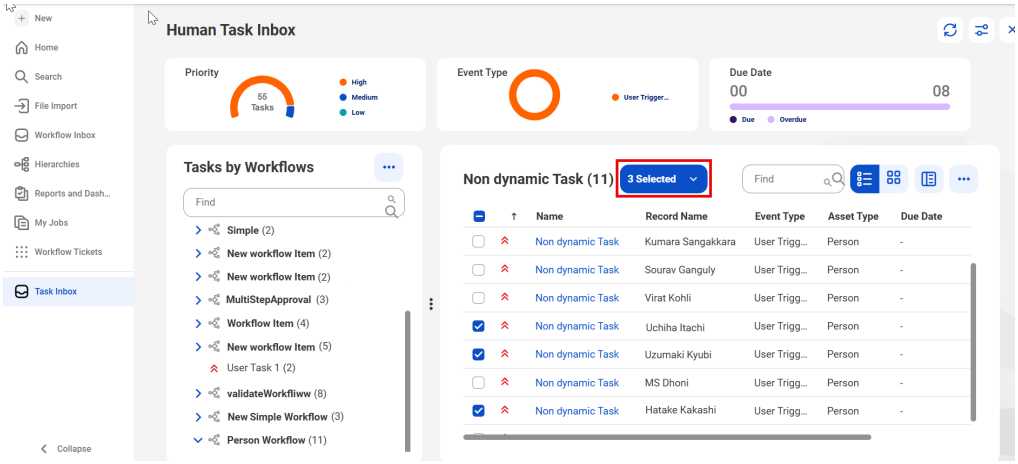

3. To assign tasks to user roles, click the **Roles** tab in the **Assign Task** dialog box and select the user roles.
4. To assign tasks to users, click the **Users** tab in the **Assign Task** dialog box and select the users.
5. Click **Assign**.

Claiming and resolving tasks

You can claim a task that you want to work on to prevent other users from working on it. To make a claimed task available to others again, unclaim it. You can also act on unclaimed tasks without claiming them.

To resolve a task, review the new, updated, or deleted records, relationships, or hierarchies, and select an action. Available actions depend on the workflow.

You can claim and resolve tasks individually or in bulk.

Reviewing new records

Review all the fields in a new record and approve the data before it becomes master data.

To collaborate with other stakeholders, add comments to tasks explaining or justifying the actions that you take. You can add comments any time, including when you act on tasks. Other reviewers can view your comments in the task and the ticket manager. Workflow initiators and administrators can view your comments in the ticket manager.

1. To understand the position of your task within the workflow and the scope of your review, check the workflow status.

   For more information about workflow status, see "Viewing the workflow status" on page 246.
2. To act on multiple tasks, select the tasks, click **Bulk Actions**, and then select the appropriate action.
3. To review a single task in detail, click the task that you want to review in the task inbox.

   The task details are displayed.
4. Review the changes and edit them, if needed.
   a. Click the **Review New Details** tab.
   b. In the **Related Records** section, review any relationships created for the record.
   c. If you find any typographical errors, incorrect values, or incorrect relationships, click **Edit**, make the required changes, then click **Apply** and **Save**.
5. Optionally, on the **Comments** tab, enter a comment, and click **Send**.
6. To resolve a task, select the appropriate action.

   Note: Available actions depend on the workflow. If a task has two actions, they appear as buttons. If a task has more than two actions, click **Action** and select the required action from the list.

Reviewing edited records

Review and approve all the changes to ensure that the data is accurate. Updated fields are highlighted.

To collaborate with other stakeholders, add comments to tasks explaining or justifying the actions that you take. You can add comments any time, including when you act on tasks. Other reviewers can view your comments in the task and the ticket manager. Workflow initiators and administrators can view your comments in the ticket manager.

1. To understand the position of your task within the workflow and the scope of your review, check the workflow status.

   For more information about workflow status, see "Viewing the workflow status" on page 246.
2. To act on multiple tasks, select the tasks, click **Bulk Actions**, and then select the appropriate action.
3. To review a single task in detail, click the task that you want to review in the task inbox.

   The task details are displayed.
4. Review the changes and edit them, if needed.
   a. Click the **Review Changes** tab.
   b. In the **Related Records** section, review the new, updated, or deleted relationships for the record.
   c. Review all the changes in the **BE Fields** and **System Fields** tabs.
   d. If you find any typographical errors, incorrect values, or incorrect relationships, click **Edit**, make the required changes, then click **Apply** and **Save**.
5. Optionally, on the **Comments** tab, enter a comment, and click **Send**.

6. To resolve a task, select the appropriate action.

   Note: Available actions depend on the workflow. If a task has two actions, they appear as buttons. If a task has more than two actions, click **Action** and select the required action from the list.

Reviewing records to resolve duplicates

To resolve duplicates, open a merge task. Review the matching records, which are potential duplicates, and the preview of the merged record.

To collaborate with other stakeholders, add comments to tasks explaining or justifying the actions that you take. You can add comments any time, including when you act on tasks. Other reviewers can view your comments in the task and the ticket manager. Workflow initiators and administrators can view your comments in the ticket manager.

1. To understand the position of your task within the workflow and the scope of your review, check the workflow status.

   For more information about workflow status, see "Viewing the workflow status" on page 246.
2. To act on multiple tasks, select the tasks, click **Bulk Actions**, and then select the appropriate action.
3. To review a single task in detail, click the task that you want to review in the task inbox.

   The task details are displayed.
4. If you use the new experience, perform the following steps:
   a. Click the **Review Merge** tab.
   b. To view survivorsip details, turn on the **Survivorship details** toggle.
   c. Optionally, to adjust the fields and the order in which they are displayed, click **Manage Fields** and select the **Custom** option, make the required changes and click **Save**.
   d. To find specific fields, use search.
   e. Optionally, hide individual fields or click **Hide All** to hide all the fields or even all the fields that appear for a specific search.
   f. To adjust the field order, drag fields.
   g. Click the **Jump to** option at the end of the list to navigate between the sections in the record.
   h. Compare the matching records.
5. Optionally, on the **Comments** tab, enter a comment, and click **Send**.
6. To resolve a task, select the appropriate action.

   Note: Available actions depend on the workflow. If a task has two actions, they appear as buttons. If a task has more than two actions, click **Action** and select the required action from the list.

Reviewing source records to unmerge from a master record

Review the source records to unmerge from a master record. The source records to be unmerged are selected. You can preview the master records that will be created after the source records are unmerged from the original master record.

To collaborate with other stakeholders, add comments to tasks explaining or justifying the actions that you take. You can add comments any time, including when you act on tasks. Other reviewers can view your

comments in the task and the ticket manager. Workflow initiators and administrators can view your comments in the ticket manager.

1. To understand the position of your task within the workflow and the scope of your review, check the workflow status.

   For more information about workflow status, see "Viewing the workflow status" on page 246.
2. To act on multiple tasks, select the tasks, click **Bulk Actions**, and then select the appropriate action.
3. To review a single task in detail, click the task that you want to review in the task inbox.

   The task details are displayed.
4. If you use the new experience, perform the following steps:
   a. Click the **Review Unmerge** tab.
   b. To view survivorsip details, turn on the **Survivorship details** toggle.
   c. Optionally, to adjust the fields and the order in which they are displayed, click **Manage Fields** and select the **Custom** option, make the required changes and click **Save**.
   d. To find specific fields, use search.
   e. Optionally, hide individual fields or click **Hide All** to hide all the fields or even all the fields that appear for a specific search.
   f. To adjust the field order, drag fields.
   g. To navigate between the sections in the record, click the **Jump to** option at the end of the list.
   h. Compare the source records.
5. Optionally, on the **Comments** tab, enter a comment, and click **Send**.
6. To resolve a task, select the appropriate action.

   Note: Available actions depend on the workflow. If a task has two actions, they appear as buttons. If a task has more than two actions, click **Action** and select the required action from the list.

Reviewing deleted records

Review deleted records to ensure that the deletion is valid.

To collaborate with other stakeholders, add comments to tasks explaining or justifying the actions that you take. You can add comments any time, including when you act on tasks. Other reviewers can view your comments in the task and the ticket manager. Workflow initiators and administrators can view your comments in the ticket manager.

1. To understand the position of your task within the workflow and the scope of your review, check the workflow status.

   For more information about workflow status, see "Viewing the workflow status" on page 246.
2. To act on multiple tasks, select the tasks, click **Bulk Actions**, and then select the appropriate action.
3. To review a single task in detail, click the task that you want to review in the task inbox.

   The task details are displayed.
4. Click the **Review Deletion** tab and review the deletion.
5. Optionally, on the **Comments** tab, enter a comment, and click **Send**.
6. To resolve a task, select the appropriate action.

   Note: Available actions depend on the workflow. If a task has two actions, they appear as buttons. If a task has more than two actions, click **Action** and select the required action from the list.

Reviewing new hierarchies

Review new hierarchies to ensure that the hierarchy is valid.

To collaborate with other stakeholders, add comments to tasks explaining or justifying the actions that you take. You can add comments any time, including when you act on tasks. Other reviewers can view your comments in the task and the ticket manager. Workflow initiators and administrators can view your comments in the ticket manager.

1. To understand the position of your task within the workflow and the scope of your review, check the workflow status.

   For more information about workflow status, see "Viewing the workflow status" on page 246.
2. To act on multiple tasks, select the tasks, click **Bulk Actions**, and then select the appropriate action.
3. To review a single task in detail, click the task that you want to review in the task inbox.

   The task details are displayed.
4. Review the changes and edit them, if needed.
   a. Click the **Review New Details** tab.
   b. Review the hierarchy displayed in the main tab and the relationships listed in the **Child Records** and **Parent Records** tabs.
   c. If you identify a record that you want to add, remove, or move, click **Edit**.
   d. To make the required changes, perform the following actions:
      - To add related records to the hierarchy, click **Add**.
      - To remove records from the hierarchy, click **Remove**.

        Note:

        For records with nested hierarchies, you can remove either only the parent record or both the parent record as well as the child records.
      - To move records within the hierarchy, drag the records.
5. Optionally, on the **Comments** tab, enter a comment, and click **Send**.
6. To resolve a task, select the appropriate action.

   Note: Available actions depend on the workflow. If a task has two actions, they appear as buttons. If a task has more than two actions, click **Action** and select the required action from the list.

Reviewing edited hierarchies

Review edited hierarchies to ensure that the relationships are valid. The edited records are highlighted.

To collaborate with other stakeholders, add comments to tasks explaining or justifying the actions that you take. You can add comments any time, including when you act on tasks. Other reviewers can view your comments in the task and the ticket manager. Workflow initiators and administrators can view your comments in the ticket manager.

1. To understand the position of your task within the workflow and the scope of your review, check the workflow status.

   For more information about workflow status, see "Viewing the workflow status" on page 246.
2. To act on multiple tasks, select the tasks, click **Bulk Actions**, and then select the appropriate action.
3. To review a single task in detail, click the task that you want to review in the task inbox.

   The task details are displayed.

4. Review the changes and edit them, if needed.
   a. Click the **Review Changes** tab.
   b. To review the change, use the available filters and the **Previous** and **Next** buttons.

      The following filters are available:

      - Show only changes: Shows only the changes made, in combination with one of the other filters.
      - Add events: Shows only records that were added to the hierarchy.
      - Delete events: Shows only records that were deleted from the hierarchy.
      - Move events: Shows only records that were moved within the hierarchy.

   c. If you identify a record that you want to add, remove, or move, click **Edit**.
   d. To make the required changes, perform the following actions:
      - To add related records to the hierarchy,click **Add**.
      - To remove records from the hierarchy, click **Remove**.

        Note:

        For records with nested hierarchies, you can remove either only the parent record or both the parent record as well as the child records.
      - To move the records within the hierarchy, drag the records.
5. Optionally, on the **Comments** tab, enter a comment, and click **Send**.
6. To resolve a task, select the appropriate action.

   Note: Available actions depend on the workflow. If a task has two actions, they appear as buttons. If a task has more than two actions, click **Action** and select the required action from the list.

Reviewing deleted hierarchies

Review deleted hierarchies to ensure that the deletion is valid.

To collaborate with other stakeholders, add comments to tasks explaining or justifying the actions that you take. You can add comments any time, including when you act on tasks. Other reviewers can view your comments in the task and the ticket manager. Workflow initiators and administrators can view your comments in the ticket manager.

1. To understand the position of your task within the workflow and the scope of your review, check the workflow status.

   For more information about workflow status, see "Viewing the workflow status" on page 246.
2. To act on multiple tasks, select the tasks, click **Bulk Actions**, and then select the appropriate action.
3. To review a single task in detail, click the task that you want to review in the task inbox.

   The task details are displayed.
4. Click the **Review Deletion** tab and review the deleted records.
5. Optionally, on the **Comments** tab, enter a comment, and click **Send**.
6. To resolve a task, select the appropriate action.

   Note: Available actions depend on the workflow. If a task has two actions, they appear as buttons. If a task has more than two actions, click **Action** and select the required action from the list.

Viewing the workflow status

You can view the workflow as a flow chart to understand where your task fits. You can also check the status of other tasks running in parallel and see if other stakeholders have already reviewed or are yet to review them.

For example, when a record for a new product is created, it can be sent to multiple stakeholders such as business, product, and marketing managers for review. A business manager can refer to the workflow to see whether the product and marketing managers have reviewed the record, helping them understand the scope of their own review.

For more information about reviewing and resolving tasks, see "Claiming and resolving tasks" on page 240.

The following image shows the workflow status for a task to review a new record:

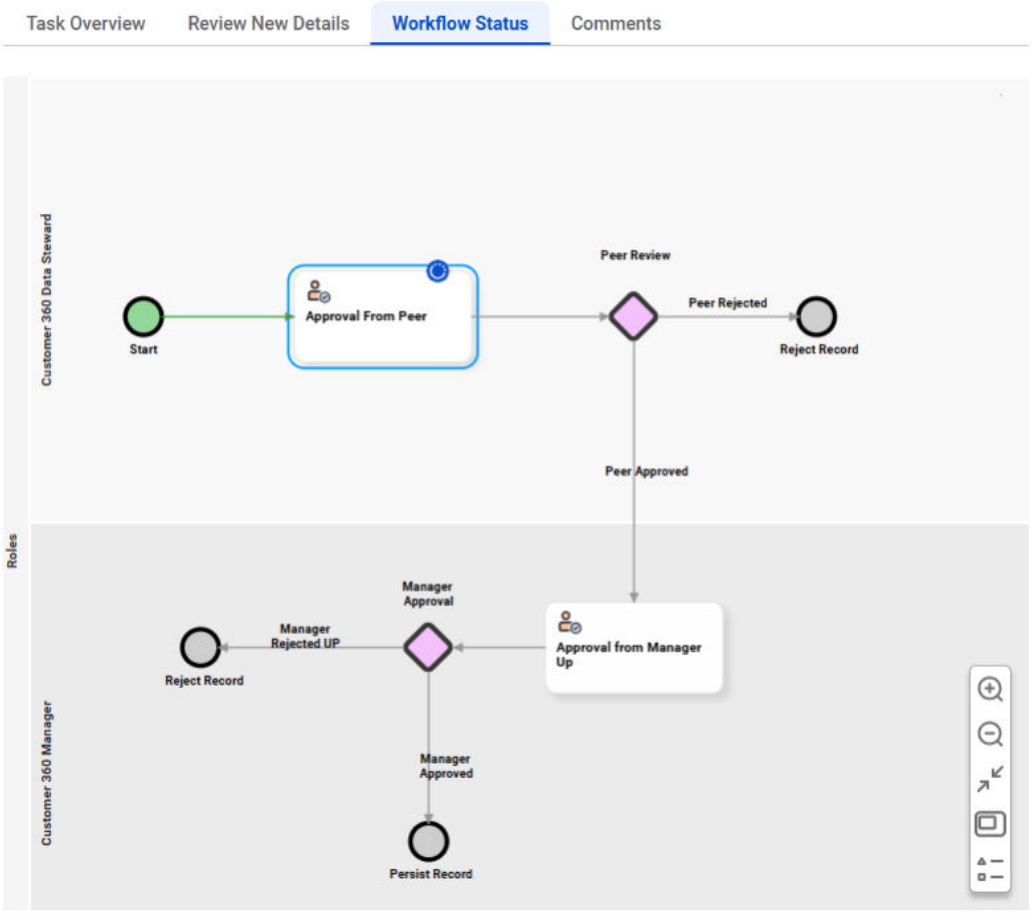

Workflow status shows you the entire sequence of a workflow, including all its components, such as user tasks for human decisions, service tasks for automated tasks performed by MDM SaaS, and possible decisions and outcomes for each task. You can also view the user role associated with each task.

You can also view the following details:

- Paths leading to and from completed tasks and in-progress tasks are shown in green color.
- Your task is highlighted in blue volor.
- All the tasks that are in progress are identified by a blue icon.

View tickets in the ticket manager

Use the ticket manager to view tickets associated with workflows in which you are a stakeholder. You can use a ticket to track all the completed tasks related to an update that triggered the workflow.

You can view a summary of all the milestones of the workflow and additional details, such as task statuses and comments, in a ticket.

For example, consider a workflow for a loan application process. When a loan application is received and the first task in the workflow is triggered, a ticket is automatically created in the ticket manager. When reviewers complete tasks, such as credit score and affordability checks, KYC document collection, and legal compliance reviews, the milestones are recorded in the ticket. After all the tasks are completed and the loan application is approved or rejected, the ticket is closed. The ticket also displays any comments that reviewers add to the tasks.

If you're a workflow initiator, you can view the tickets for workflows that you initiate. You can check tickets to verify whether your changes are approved, under review, or rejected. You can also view comments from reviewers for context on their actions.

If you're a reviewer, you can view tickets for the workflows that you're assigned to review. Use tickets to verify the status of records that you reviewed and view comments from other reviewers to collaborate with them.

If you're an admin, you can view all the tickets for your organization.

Ticket manager

Use the ticket manager to view the tickets for which you are a stakeholder.

The following image shows the ticket manager:

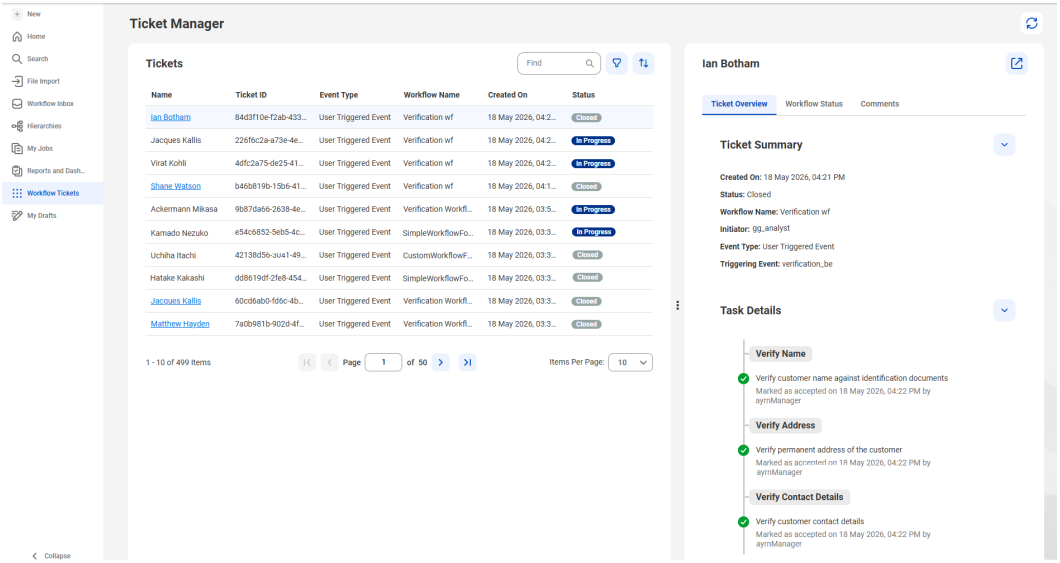

To view the details of a ticket, click the ticket.

The following table describes the details that you can view for a ticket:

Tab	Description
Ticket Overview	Displays the ticket summary and task details. The ticket summary includes details, such as the created date, status, workflow name, initiator, event type of the workflow, and the triggering event. The ticket details include the completed tasks in the workflow, such as the date and time of completion, action taken, and the name of the user who completed the task.
Workflow status	Displays a flow chart that illustrates the workflow and indicates its current status.
Comments	Displays the comments that stakeholders added to each task.

You can perform the following actions in the Tickets section:

- Search for specific tickets.
- Sort tickets by name, ticket ID, event type, workflow name,date created, and status.
- Filter tickets by ticket ID, event type, and status.
- Open records that triggered workflows when updated.
- Open records that were approved through workflows.

CHAPTER 10

Monitor jobs

You can monitor jobs that run as a result of the actions that you perform in Supplier 360 SaaS. These jobs appear on the **My Jobs** page. For example, when you import data, Supplier 360 SaaS creates and runs an import job that you can monitor on the **My Jobs** page.

To open the **My Jobs** page, click the **My Jobs** tab.

My Jobs page

You can monitor your jobs on the My Jobs page.

The My Jobs page lists the job instances that are currently running, failed, and successfully completed.

The following image shows the My Jobs page with a list of job instances:

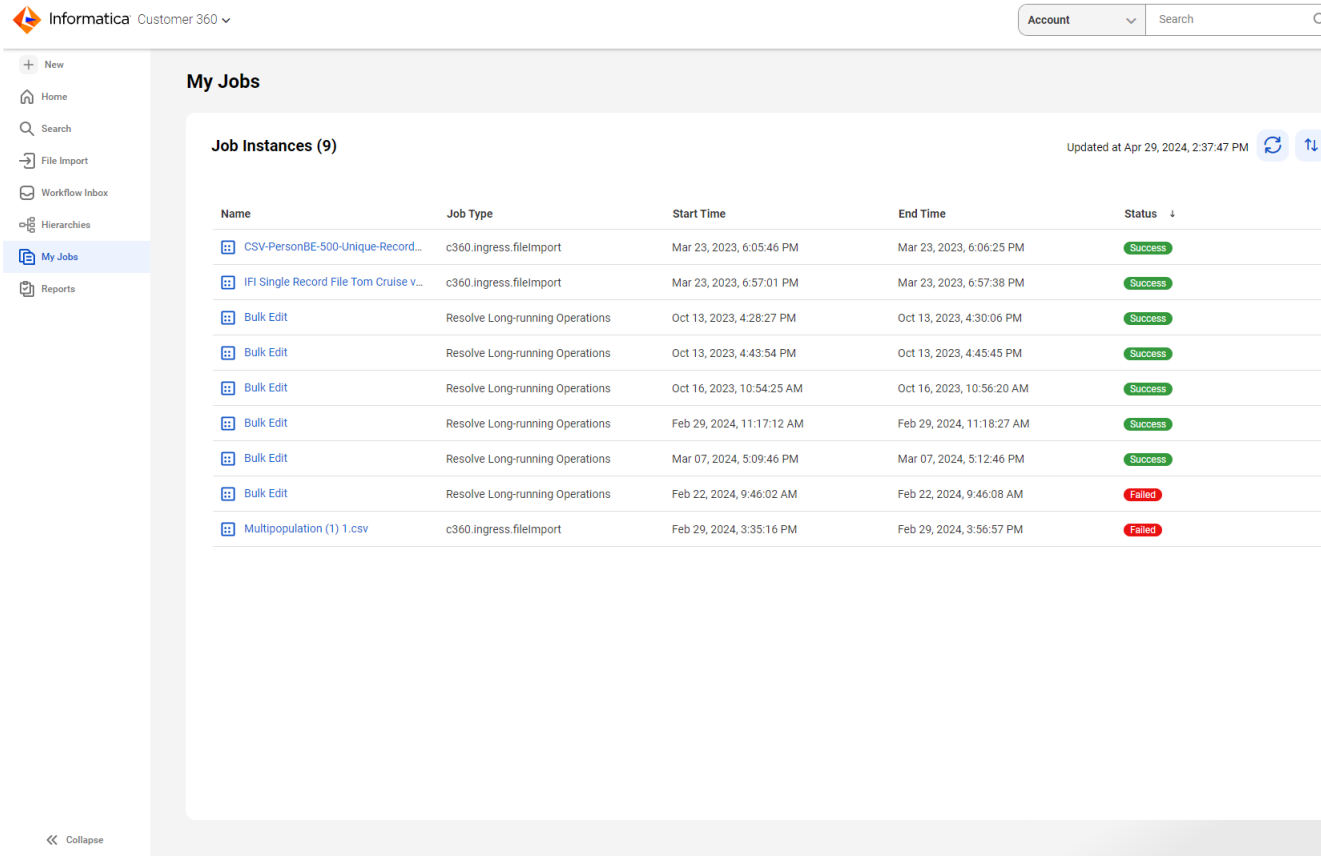

The following table describes the properties that appear for each job instance:

Property	Description
Name	Name of the job.
Job Type	Type of job executed.
Start Time	Date and time that the job started.
End Time	Date and time that the job completed or stopped.
Status	A job instance can display one of the following statuses: - Running - Success - Failed - Suspended - Stopping - Stopped

Managing your job instances

You can perform specific tasks on the **My Jobs** page that enables you to manage your job instances according to your requirements.

The following table describes the tasks that you can perform when you monitor jobs:

Task	Description
Find and filter jobs	You can find specific jobs by specifying a filter. To specify a filter, click **Add Field**, and select the property to filter by.
Sort jobs	You can sort the job instances based on Instance ID, Job Identifier, Start Time, End Time, or Status.
View job details	Click the job Instance ID to view the job details.

Customizing the My Jobs page

You can configure the columns on the My Jobs page. To configure the columns, right-click the column header, and check or clear the properties.

The following image shows the properties menu on the column header of the My Jobs page:

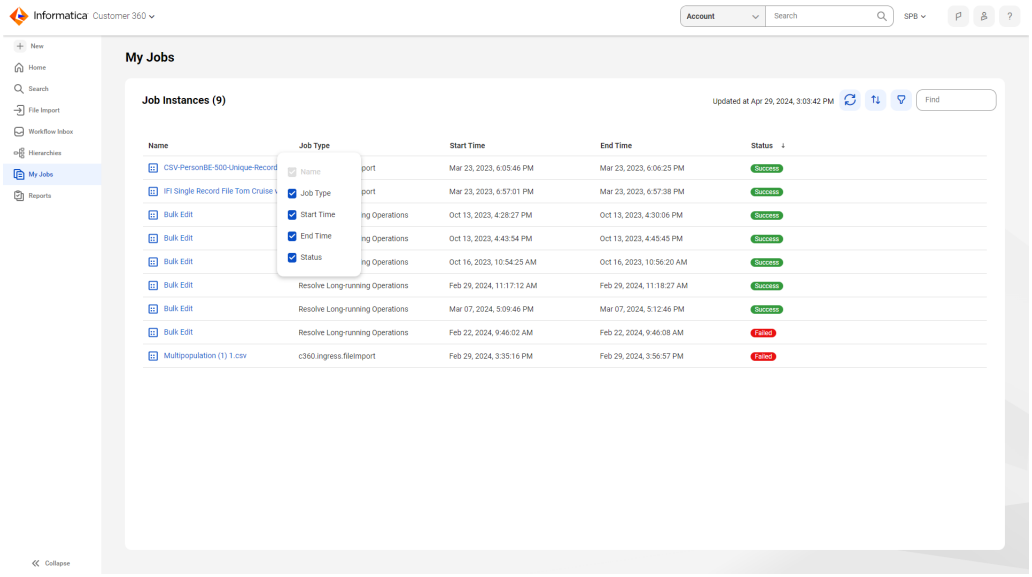

Viewing specific job details

You can drill down on any job on the My Jobs page to display detailed information about the job.

To drill down and view additional details about a specific job, click the job instance ID. You can view key metrics about the job, such as total records processed, records processed successfully, and failed records. The metrics vary for each job.

You can also view the overall data flow process for each job instance. Select a specific process step to view the details of that step.

Note: If the transform step fails, when you download the sessions log, you can view up to 10,000 skipped records.

The following image shows the details of a bulk edit job:

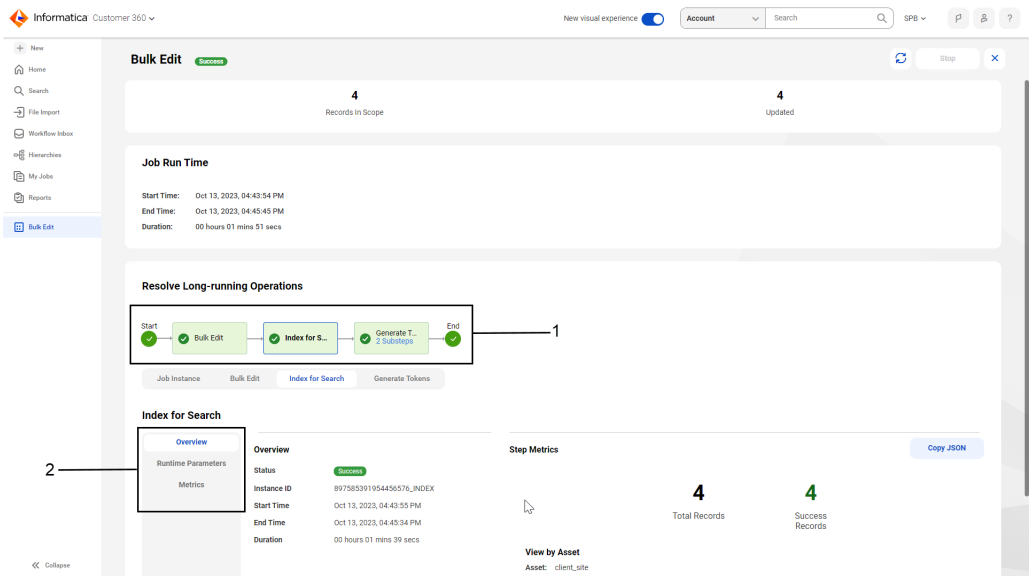

1. Overall data flow process for the job instance.
2. Details of the selected process step.

Each step displays one or more of the following details:

- Overview. Details of the job instance and the status, start time, and end time for the step.
- Runtime Parameters. Details such as name of the runtime environment that the step uses, start time and end time for the step, and user name or ID of the person who started the step.
- Metrics. Key metrics of the step, such as total records processed and the number of failed records.
- Errors. Number of records that are rejected. You can download the rejected records.

  Note: MDM SaaS stores the rejected records in the database for seven days. Ensure that you download the rejected records within the specified time period.

Resolve long-running operations job

The resolve long-running operations job runs automatically to complete operations that time out.

When operations, such as merge and unmerge, take longer than expected to complete, they can time out. When an operation times out, the resolve long-running operations job runs automatically and completes the operation. You can view the details of these jobs on the **My Jobs** page.

MDM SaaS limits the number of resolve long-running operations jobs that can run concurrently on a POD. If the number of concurrent jobs reaches the limit on a POD, the operation fails. You can perform the operation again later.

Stopping a job

You can stop a job that's in progress. For example, if a job takes a long time to run, you might want to stop it. You can't restart or resume a job that's stopped.

To stop a job, perform one of the following tasks on the **My Jobs** page.

- From the **Actions** menu of the job instance, click **Stop**.
- Click the name of the job instance, and then click **Stop**.

When you stop a job, the data might be partially processed. To find and process the unprocessed data, contact your administrator.

Monitoring queued jobs

To run a job, MDM SaaS requires sufficient resources, such as cores and memory. Based on the number of records that a job processes, MDM SaaS allocates the required resources and completes each process step of the job.

After the job completes each process step, MDM SaaS changes the status of the job. The change in job status depends on the records that MDM SaaS processes in each process step.

Based on the number of records that the job processes, MDM SaaS requires sufficient resources to complete each process step of the job. If MDM SaaS doesn't have sufficient resources to complete a process step, it changes the job status from **Running** to **Queued**. For example, if you run an ingress job with more than 10,000 records, the job requires sufficient resources to complete each process step. After the transform step, if MDM SaaS doesn't have sufficient resources to complete the load step, MDM SaaS queues the job.

MDM SaaS queues ingress and egress jobs when the count of concurrently running ingress and egress jobs reaches 25 on a POD or 5 within an organization.

MDM SaaS queues the stage step of egress jobs that process over 1000 records. For ingress jobs, MDM SaaS queues the load step that processes over 1000 records, transform step that processes over 100,000 records, index for search step that processes over 10,000 records, and generate match keys step that processes over 5000 records.

Note: MDM SaaS doesn't queue the extract step of ingress and egress jobs.

When a process hierarchy job is running for a particular hierarchy, no other job can run simultaneously for the same hierarchy. Instead, the subsequent jobs are queued and remain in a queued state until the previous job is complete.

Monitoring bulk edit jobs

You can monitor and view the details of a bulk edit job on the **My Jobs** page.

You can view the job summary that includes the number of records selected for editing, the number of records updated, and the number of records that match the edit criteria. You can also view the status, start and end times, and duration of completion of the job.

You can view the metrics for the following steps of bulk edit jobs:

- Bulk Edit
- Index for Search
- Generate Tokens

Bulk Edit step

During the bulk edit step, the job edits the field values of multiple records simultaneously. You can view the processing time, runtime parameters, and other metrics for the step.

The following table describes the metrics that you can view for the bulk edit step:

Metric ID	Description
number_of_records_skipped	The total number of records that the step didn't process.
number_of_records_in_scope	The number of records selected for bulk editing, including those in a pending state and those that didn't match the edit criteria.
number_of_records_succeeded	The number of records that are updated and moved to the index for search step.
number_of_records_failed	The number of records that weren't updated. A record doesn't get updated for the following reasons: - The record has validation errors. - The number of source records that contribute to the master record exceeds 1000.

Index for Search step

During the Index for search step, the bulk edit job indexes the records for search based on the search configuration.

The following table describes the metrics that you can view for the index for search step:

Metric ID	Description
SEARCH_INDEX_TOTAL_RECORDS	The total number of records that the step processed.
SEARCH_INDEX_FAILED_RECORDS	The number of records that failed to index.
SEARCH_INDEX_SUCCESS_RECORDS	The number of records that are indexed for search requests.
SEARCH_INDEX_UPSERT_SUCCESS	The number of records for which the search indexes are added or updated.
SEARCH_INDEX_UPSERT_FAILURE	The number of records that failed to index for search.
SEARCH_INDEX_DELETE_SUCCESS	The number of records whose indexes were deleted.
SEARCH_INDEX_DELETE_FAILURE	The number of records whose indexes failed to be deleted.

You can also view the runtime parameters for the index for search step.

Generate Tokens step

During the generate tokens step, the bulk edit job generates match keys for all the records. Currently, the step uses the SSA-NAME3 algorithm to generate match keys. The TF-IDF algorithm is not available in the current release.

The following table describes the metrics that you can view for the generate tokens step:

Metric ID	Description
MATCH_TOKENIZE_TOTAL_RECORDS_READ	The total number of records for which the step generated match keys.
MATCH_TOKENIZE_TOTAL_RECORDS	The number of records for which match keys are generated.
MATCH_TOKENIZE_FAILED_RECORDS	The number of records for which the step didn't generate match keys because of internal errors.
MATCH_TOKENIZE_SKIPPED_RECORDS	The number of records that the step skipped because of some internal issues.

You can also view the runtime parameters for the generate tokens step.

CHAPTER 11

Use CLAIRE Copilot for Supplier 360 SaaS

Use CLAIRE Copilot to discover business entities, explore metadata of business entities, and explore records in business entities.

Getting started with CLAIRE Copilot

CLAIRE Copilot is a conversational interface that you can use to create and understand assets in your organization by using natural language prompts.

To access CLAIRE Copilot, you need the CLAIRE GPT User role. If you can't access CLAIRE Copilot, contact Informatica Global Customer Support.

CLAIRE Copilot is available for the following services:

- Application Integration
- Data Integration
- Data Ingestion and Replication
- Customer 360 SaaS
- Product 360 SaaS
- Supplier 360 SaaS
- Multidomain MDM SaaS

CLAIRE Copilot features

CLAIRE Copilot integrates with MDM SaaS to help you discover business entities, explore metadata of business entities, and explore records in business entities.

The following table describes the MDM SaaS tasks that you can perform using CLAIRE Copilot:

Task	Description
Data discovery	Start conversations to quickly search and discover business entities from Supplier 360 SaaS. For more information about data discovery, see *Discovery Agent* in Data Management Agents.
Metadata exploration	Explore, view, and understand the metadata attributes of a business entity in Supplier 360 SaaS. The metadata exploration includes details, such as business entity overview, searchable attributes, match rules, data quality rules, and survivorship rules. For more information about metadata exploration, see *Discovery Agent* in Data Management Agents.
Data exploration	Explore records by using field values as search criteria and then download sample data from Supplier 360 SaaS. For more information about data exploration, see *Discovery Agent* in Data Management Agents.

CLAIRE Copilot can answer questions about information available in the Informatica documentation portal, Knowledge Base articles, and How-To Library article.

CLAIRE Copilot can't help you with other tasks that aren't listed here.

Enable CLAIRE generative AI services

As an organization administrator, you need to authorize users of your organization to utilize Informatica's CLAIRE services either by enabling CLAIRE generative AI services in Administrator or by providing consent to use CLAIRE services in CLAIRE Copilot.

You can enable CLAIRE generative AI services for your organization in one of the following ways:

- In Administrator > **Settings**, select **Enable CLAIRE Generative AI Services**.
- Click **Yes, I agree** on the **Welcome to CLAIRE Copilot!** dialog box in your service.

  Note: After you give consent to use CLAIRE services, the **Enable CLAIRE Generative AI Services** check box in Administrator appears enabled.

After you enable CLAIRE generative AI services, tasks run in the background to make CLAIRE available for all users in your organization, and this could take several minutes to complete. You can continue to use other services during this time.

CLAIRE services from Informatica operate with a level of autonomy to provide information, suggestions, or other outputs in response to natural language queries from users. CLAIRE services are designed to facilitate the use of applicable cloud services by users but might generate errors. Your organization is responsible for reviewing the outputs to ensure they are appropriate for your business needs.

The following image shows the consent dialog box in CLAIRE Copilot:

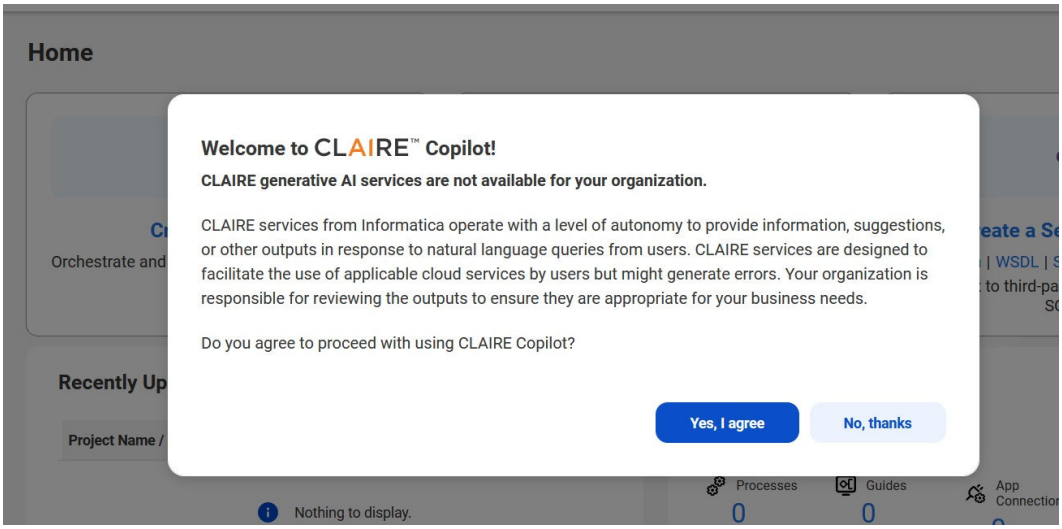

For more information about how to enable CLAIRE generative AI services in Administrator, see *Organization Administration* in Administrator.

Open CLAIRE Copilot and start a conversation

Open CLAIRE Copilot from the **Home** page of your service. When you open CLAIRE Copilot, a conversation window appears where you can start or continue a conversation.

1. On the **Home** page of your service, select the CLAIRE Copilot icon to open the conversation window.

   The following image shows the CLAIRE Copilot icon and the conversation window:

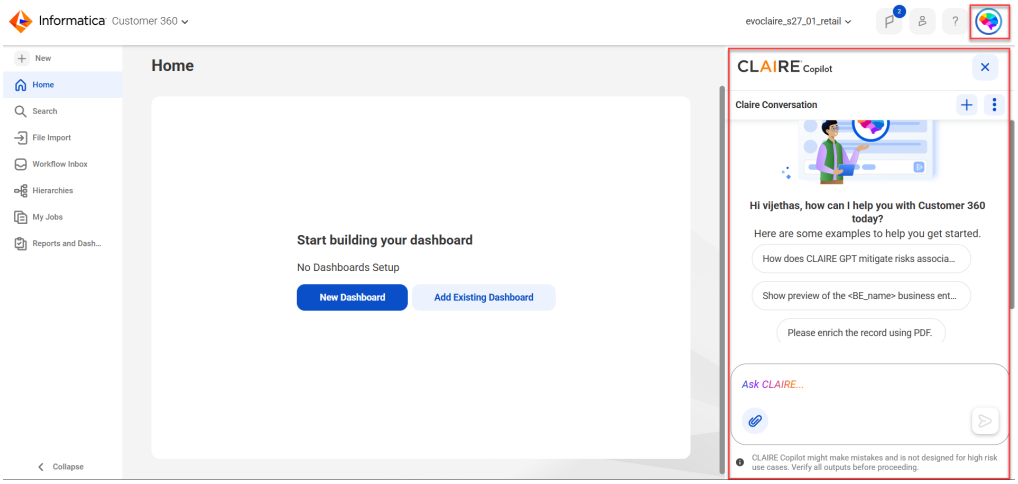

2. Select one of the sample prompts, or type your own prompt in the prompt text box.

   Optionally, hover over the keyboard shortcuts to help you write a prompt.

3. Submit the prompt and wait for CLAIRE Copilot to return a response.

   To cancel a prompt, select **Stop generating response** before CLAIRE Copilot displays the response.

Ask questions about the Informatica help

CLAIRE Copilot can answer questions about IDMC on the Informatica Documentation Portal, in Knowledge Base articles, and in How-To Library articles.

CLAIRE Copilot has access to the following documentation:

- Informatica Documentation Portal
- Knowledge Base articles
- How-To Library articles

You can ask CLAIRE Copilot questions about the functionality that's available in IDMC, how to create assets, how to resolve errors, and best practices. You can also ask CLAIRE Copilot about its own capabilities.

For example, you can ask the following question:

```
What can CLAIRE Copilot do today in Master Data Management?
```

Use the following guidelines to improve responses:

Provide context for the question.

Provide the the context, details, and service name for CLAIRE Copilot to understand how and where it can find the answer to your question in the Informatica help.

For example, the following questions specify the service name:

```
How to manage hierarchical relationships for customers in Customer 360?
```

Rephrase the question.

CLAIRE Copilot answers questions based on the information that's available in the Informatica help. If CLAIRE Copilot doesn't return the answer you expected, try rephrasing the question or using terminology from the Informatica help.

For example, if CLAIRE Copilot doesn't understand `basic summary`, try `brief summary`.

Leave feedback

We welcome feedback on your experience with CLAIRE Copilot. You can use the **Like** and **Dislike** icons to rate responses. To provide more details, select **Add Comments** or send an email to `copilot-feedback@informatica.com`.

If you need to report an issue, you can copy the conversation ID from the **Actions** menu of the conversation window. Include the conversation ID in the issue.

Informatica carefully reviews your feedback and uses it to improve CLAIRE Copilot for everyone.

Clear conversation memory

CLAIRE Copilot remembers the prompts and responses during your conversation so it can help you continue working on the same asset.

If you don't want CLAIRE Copilot to refer to information in previous prompts and responses, you can clear the conversation memory. For example, you might want to clear the conversation memory if you want to start working on a new asset.

You can clear the conversation memory in one of the following ways:

- Start a new conversation. To start a new conversation, click the **Plus** icon. CLAIRE Copilot clears its memory and resets the conversation window.

- Enter the prompt `Start Over`. CLAIRE Copilot clears its memory but you can still see the previous conversation in the conversation window.

Discover assets

Quickly search and discover business entities in Supplier 360 SaaS with CLAIRE Copilot.

When you use data discovery to find assets in Supplier 360 SaaS, CLAIRE Copilot returns the available business entities but doesn't return reference data sets.

CLAIRE Copilot lists all business entities in Supplier 360 SaaS and a few prompt suggestions. You can click the suggested prompts to analyze deeper.

You can rapidly identify business entities and perform metadata and data exploration using simple natural language prompts.

Data discovery prerequisites

Before you perform data discovery tasks in CLAIRE Copilot for MDM SaaS, ensure that you perform the following tasks:

- Enable the MDM SaaS service for the runtime environment that your organization uses.
- Verify that business entities are available in MDM SaaS.
- Upgrade Customer 360 SaaS, Product 360 SaaS, and Supplier 360 SaaS to the latest version.

Data discovery sample prompts

Let's take a look at a sample conversation to help you get started on your Supplier 360 SaaS data discovery journey in CLAIRE Copilot.

Your organization uses MDM SaaS to store customer, product, and supplier records. As a data steward, you want to discover all business entities in MDM SaaS and then discover business entities in Supplier 360 SaaS to identify customer data that you can use in your analysis.

1. Start a conversation to help you discover all business entities in MDM SaaS.
   Enter the following prompt:

   ```
   Show all business entities in MDM
   ```

   The following image shows the response displaying all business entities in MDM SaaS:

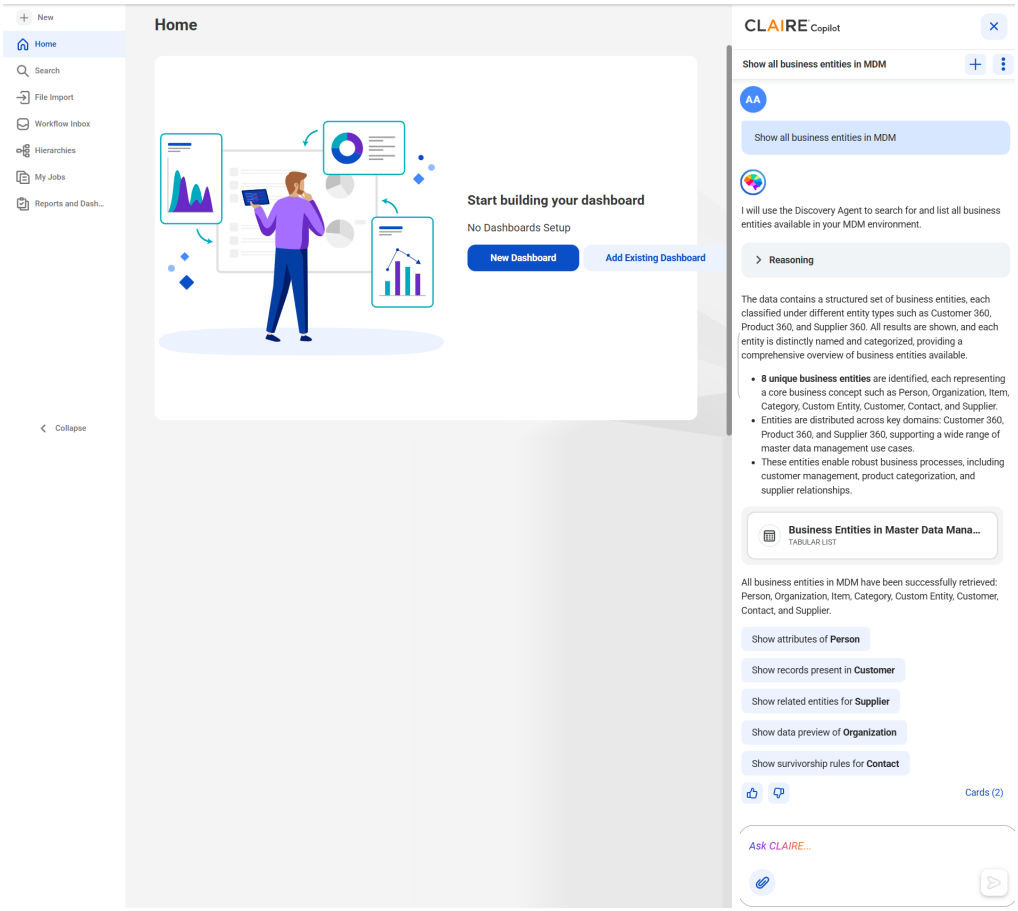

Using the data discovery skill, the discovery agent has found business entities that are available in MDM SaaS. You can expand the reasoning to view the query analysis process of the discovery agent.

To preview the business entities, click the card named **Business Entities in Mater Data Management**.

2. To find all business entities in Customer 360 SaaS, enter the following prompt:

```
Find all business entities in Customer 360
```

The following image shows the response displaying all business entities in Customer 360 SaaS:

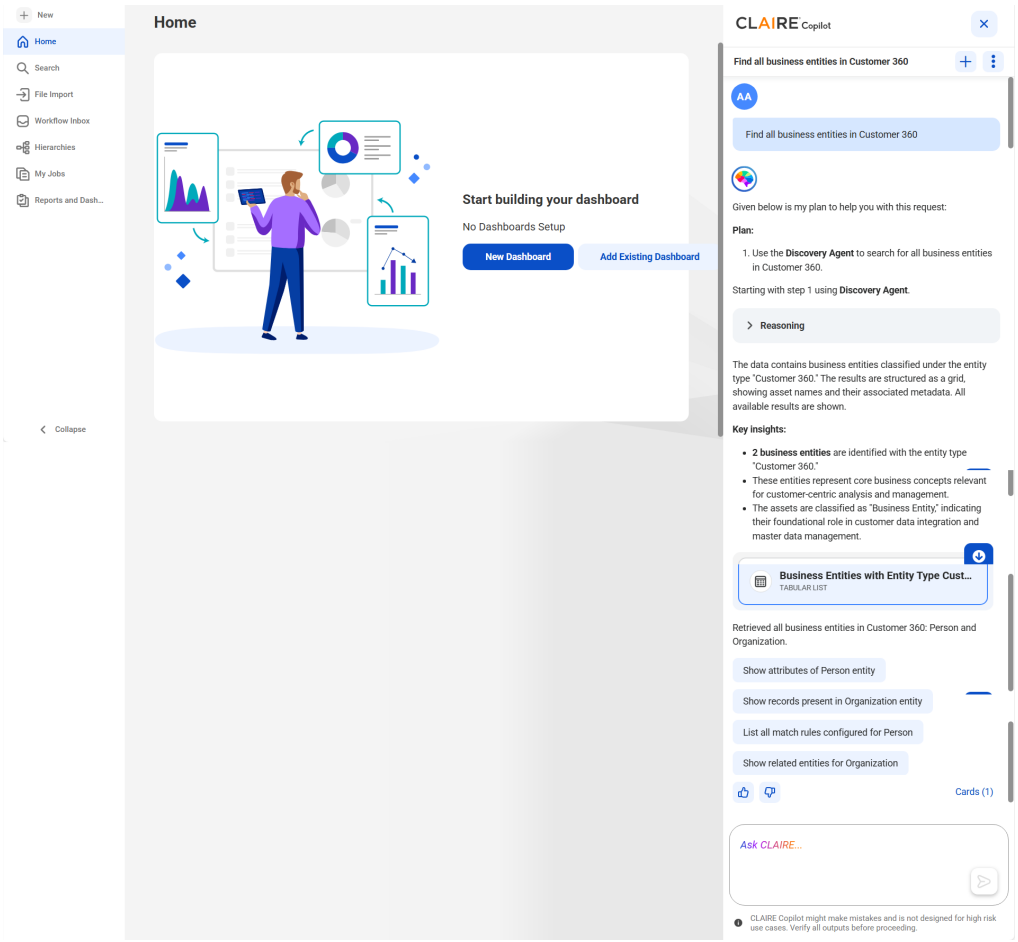
New
Home
Search
File Import
Workflow Inbox
Hierarchies
My Jobs
Reports and Dash...
Collapse
Home
Start building your dashboard
No Dashboards Setup
New Dashboard
Add Existing Dashboard
CLAIRE Copilot
Find all business entities in Customer 360
AA
Find all business entities in Customer 360
Given below is my plan to help you with this request:
Plan:
1. Use the Discovery Agent to search for all business entities in Customer 360.
Starting with step 1 using Discovery Agent.
Reasoning
The data contains business entities classified under the entity type "Customer 360." The results are structured as a grid, showing asset names and their associated metadata. All available results are shown.
Key insights:
2 business entities are identified with the entity type "Customer 360."
These entities represent core business concepts relevant for customer-centric analysis and management.
The assets are classified as "Business Entity," indicating their foundational role in customer data integration and master data management.
Business Entities with Entity Type Cust...
TABULAR LIST
Retrieved all business entities in Customer 360: Person and Organization.
Show attributes of Person entity
Show records present in Organization entity
List all match rules configured for Person
Show related entities for Organization
Cards (1)
Ask CLAIRE...
CLAIRE Copilot might make mistakes and is not designed for high risk use cases. Verify all outputs before proceeding.

3. .To preview all business entities, click the card named **Business Entities with Entity Type Customer 360**. The following image shows the canvas with a tabular view of business entities from Customer 360 SaaS:

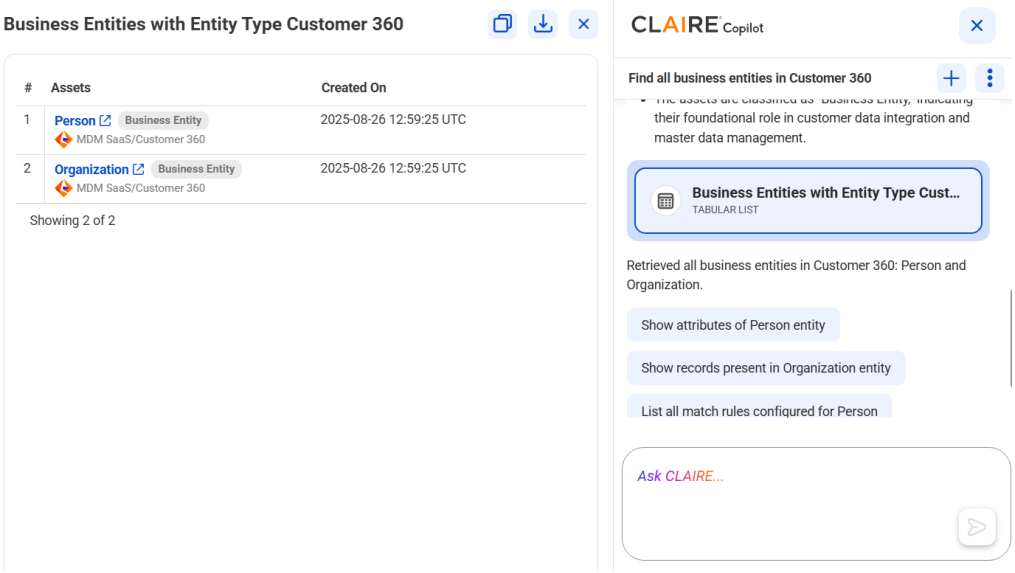

You can click the business entity name to see the details in MDM SaaS.

Similarly, you can also discover business entities in Product 360 SaaS and Supplier 360 SaaS.

Additionally, CLAIRE Copilot displays prompt suggestions to explore relevant details.

Explore metadata of assets

Explore, view, and understand the metadata of an asset in Supplier 360 SaaS with CLAIRE Copilot.

Metadata exploration prerequisites

Before you perform metadata exploration tasks in CLAIRE Copilot for MDM SaaS, ensure that you perform the following tasks:

- Enable the MDM SaaS service for the runtime environment that your organization uses.
- Verify that business entities are available in MDM SaaS.
- Upgrade Customer 360 SaaS, Product 360 SaaS, and Supplier 360 SaaS to the latest version.

Metadata exploration sample prompts

Let's take a look at a sample conversation to help you get started on your Supplier 360 SaaS metadata exploration journey in CLAIRE Copilot.

For example, as a data steward, you want to view an overview of a business entity and explore its attributes, data quality rule associations, survivorship rules, and match rules configured for the business entity.

1. Start a conversation to see the metadata assets of the Person business entity.

Enter the following prompt:

```
Show me an overview of Person
```

The following image shows the response displaying an overview of the Person business entity:

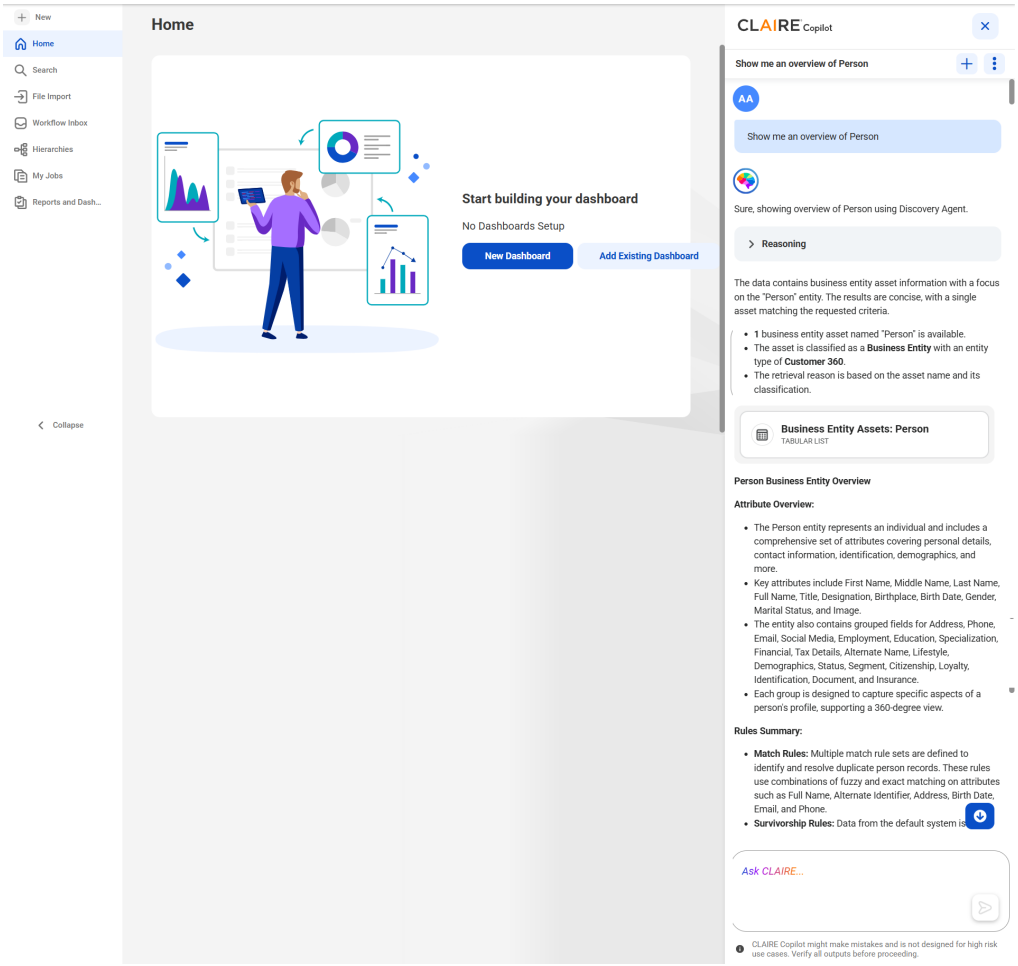

Using the metadata exploration skills, the discovery agent returns the description of the Person business entity, match rules, survivorship rules, and attributes.

Note: CLAIRE Copilot displays only the attributes that are configured as searchable in the business entity.

2. To view all data quality rule associations configured in the Person business entity, you can enter the following prompt:

   ```
   Show data quality rules for Person
   ```

   The following image shows the response displaying all data quality rule associations that are configured in the Person business entity:

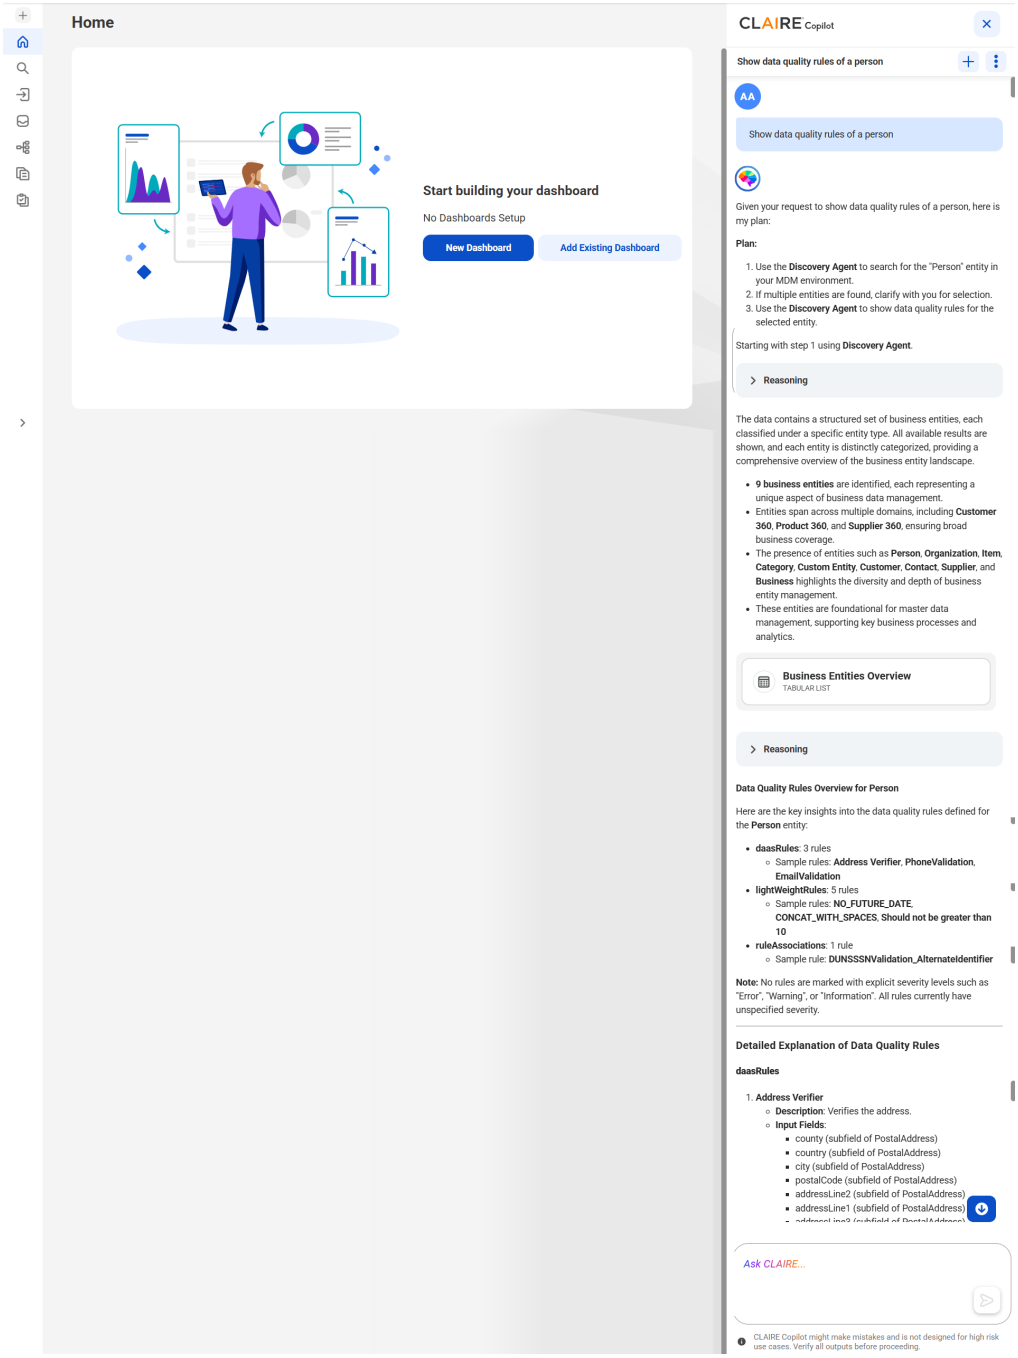

3. If you want to view all attributes that you are allowed to edit in the Person business entity, you can enter the following prompt:

   ```
   What attributes am I allowed to edit in Person?
   ```

   The following image shows the response displaying all editable attributes in the Person business entity:

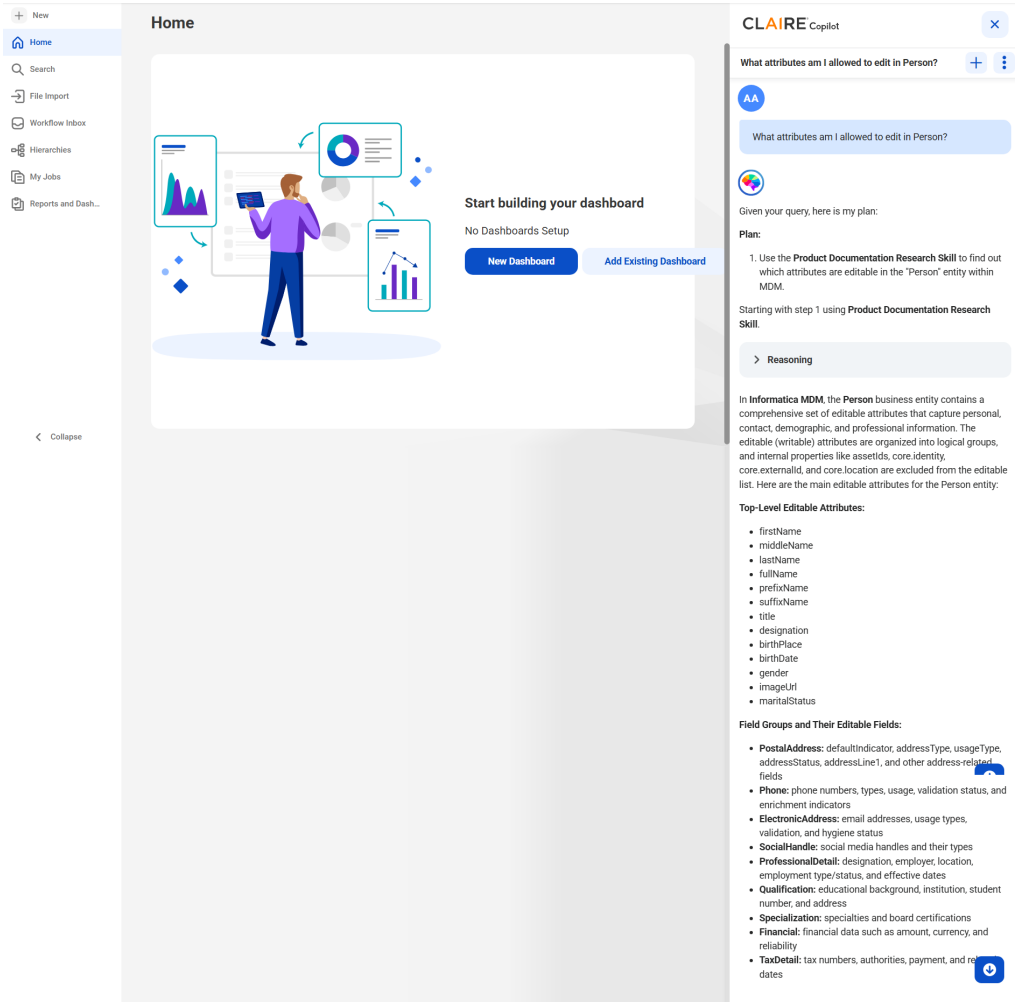

Explore source data of assets

You can explore records with specific search criteria and download the sample data with CLAIRE Copilot.

You can explore only the active and valid records from MDM SaaS. After you search for records in CLAIRE Copilot, navigate to a specific MDM SaaS business application to view additional search results.

Data exploration prerequisites

Before you perform data exploration tasks in CLAIRE Copilot for MDM SaaS, ensure that you perform the following tasks:

- Enable the MDM SaaS service for the runtime environment that your organization uses.
- Verify that business entities are available in MDM SaaS.
- Upgrade Customer 360 SaaS, Product 360 SaaS, and Supplier 360 SaaS to the latest version.

- Ensure that the prompts include values from fields that are set as searchable and facetable in Business 360 Console.
  If the prompt contains data from fields that aren't searchable or facetable in Business 360 Console, CLAIRE Copilot can't visualize or search for data.

  For more information about searchable and facetable properties, see *Define the Data Model* in the Business 360 Console help.
- Verify that your user role has the read privilege for business entities and attributes that you use in the prompts.
- To retrieve accurate prompt responses, ensure that the business entity attributes contain meaningful descriptions in Business 360 Console.
  For example, a business entity includes two City attributes, one for address and one for the place of birth. If your prompt is to find customers living in New York, CLAIRE refers to the attribute description for the context.

Data exploration examples

Let's take a look at a sample conversation to help you get started on your data exploration journey in CLAIRE Copilot.

For example, as a data steward, you want to view all records in the person entity and use a pie chart to clearly visualize the distribution of loyalty account types. Additionally, you want to generate a bar chart to analyze person records by their address type to understand customer locations.

To achieve the goal, perform the following steps:

1. Start a conversation to see all records in the Person business entity.
   Enter the following prompt:

   ```
   Show all records in @Person
   ```

   The following image shows the response displaying a card containing all records in the Person business entity:

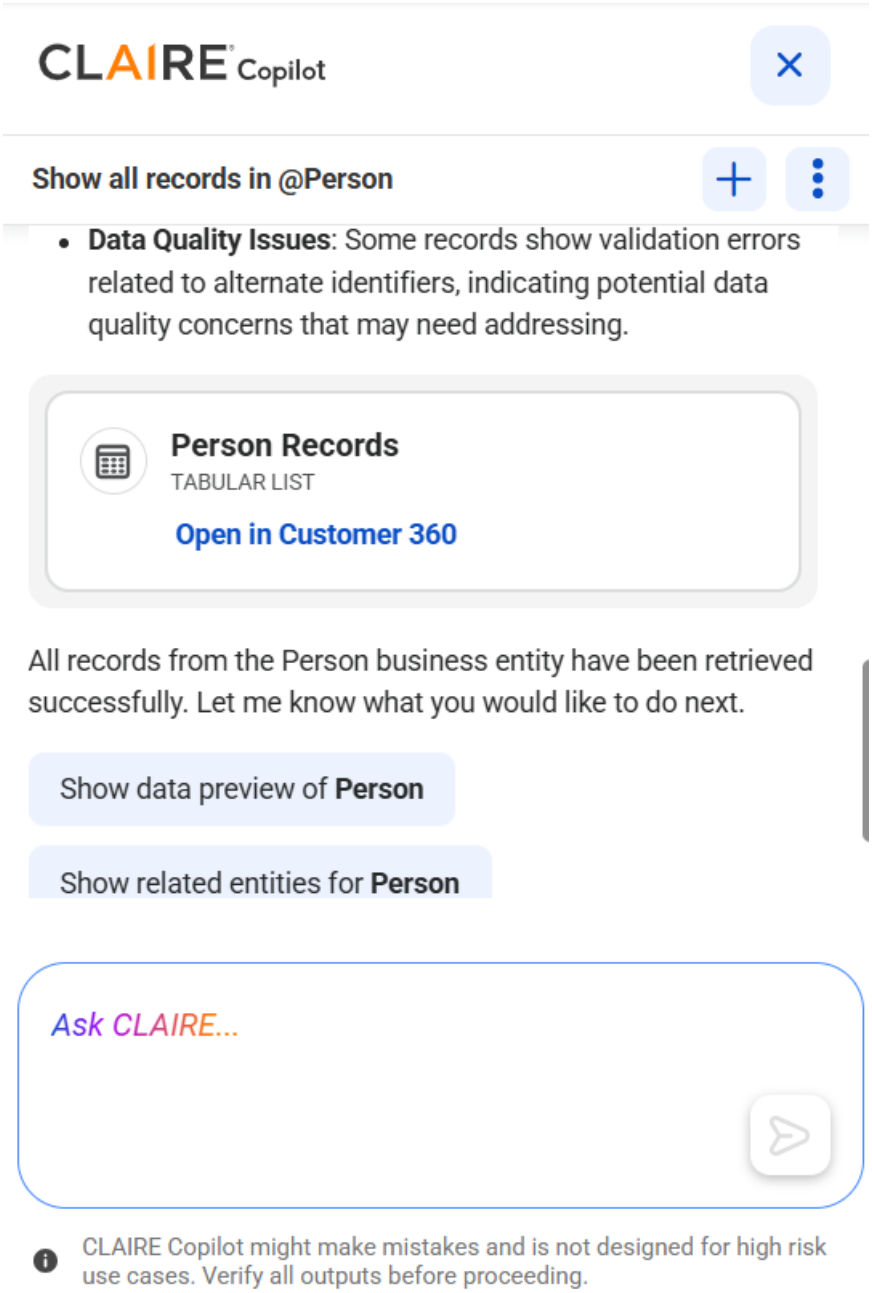

Using the data discovery agent, CLAIRE Copilot also recommends prompt suggestions. You can select from the suggested prompts for further analysis.

2. To view all records in a tabular view, click the card named **Person Records**.
The following image shows the response displaying a tabular view of all records in the Person business entity:

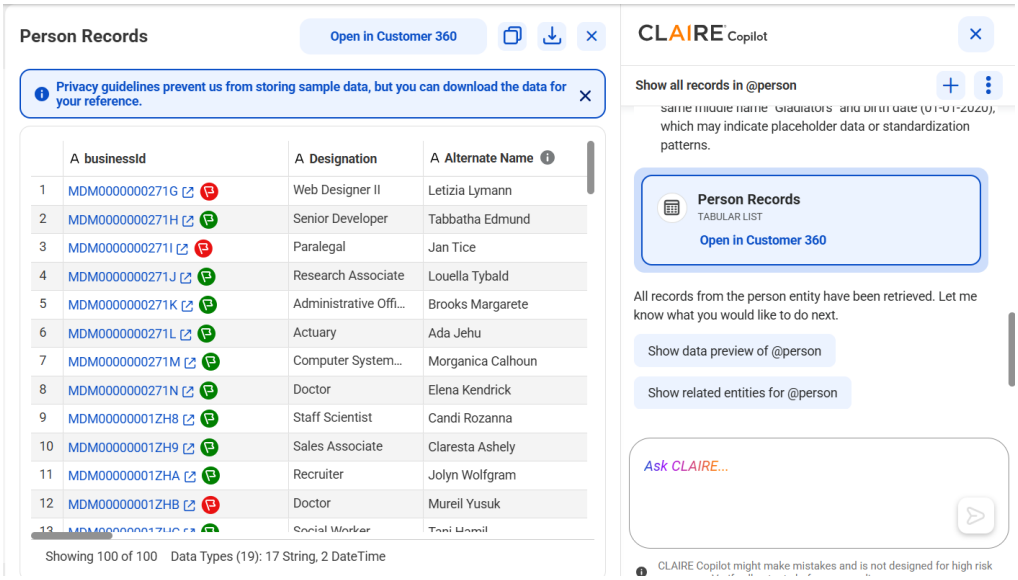

You can click a business ID to view the record. To copy and paste the sample data to a CSV file, click the **Copy** icon. To export the sample data to a CSV file, click **Download**.

3. To visualize the distribution of account types, enter the following prompt:

   ```
   Create a pie chart displaying the LoyaltyAccount: accountType for Person entity
   ```

   The following image shows the response displaying a pie chart that represents the records by account type:

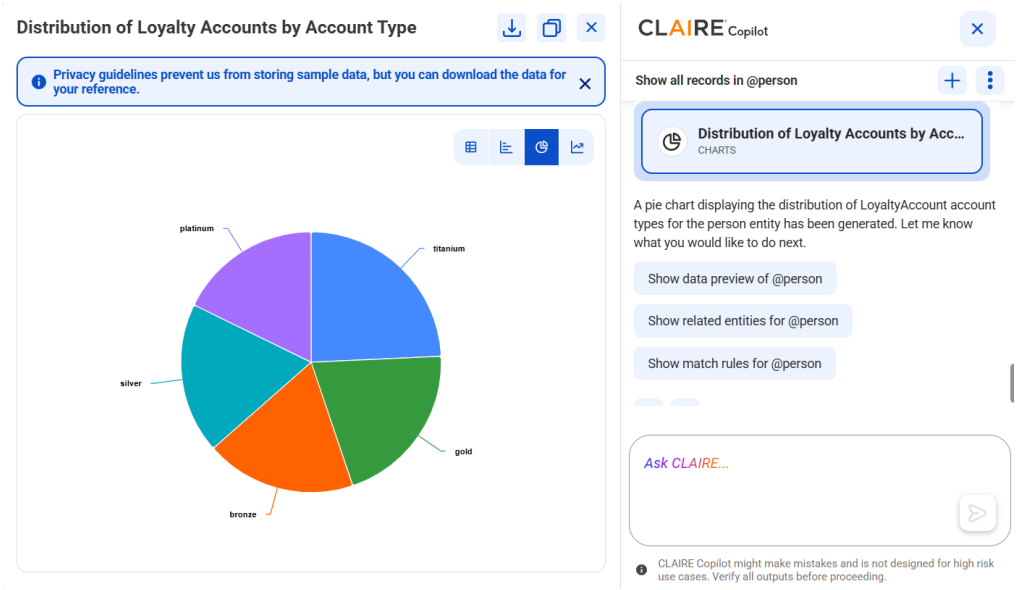

4. To generate a bar chart to visualize the person records based on their state, enter the following prompt:

   ```
   Create a bar chart to visualize the Person records based on address: state
   ```

   The following image shows the response displaying a bar chart that represents the person records based on their states:

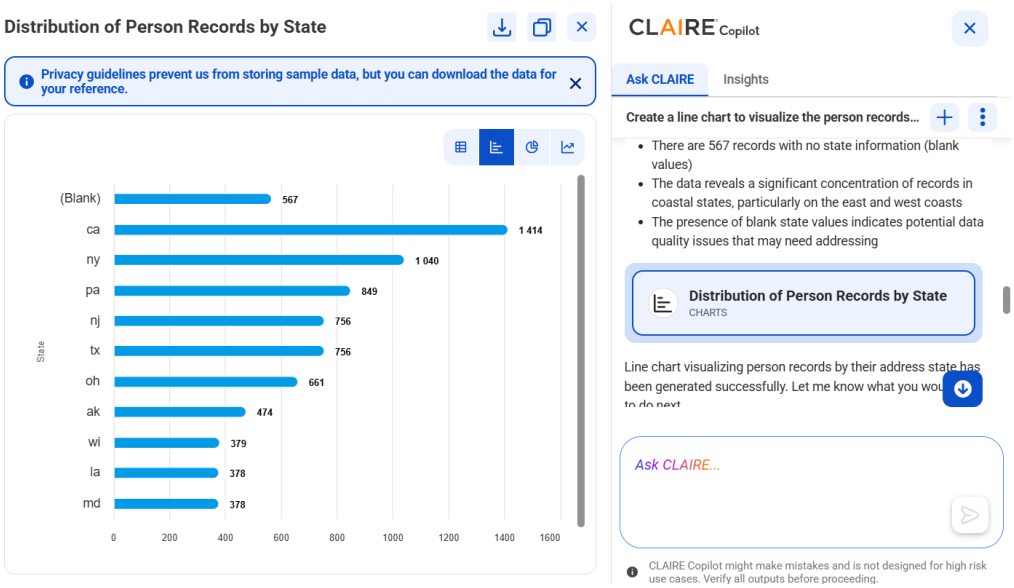

Product experience agent

Use the product experience agent to enrich product records in MDM SaaS. You can access the product experience agent across all business applications. However, the agent is certified to enrich only product records.

The product experience agent autonomously performs tasks, makes decisions, and seeks human intervention when it can't make decisions on its own.

The agent can enrich records with data from PDF documents and from external sources. The agent can also classify records. After the agent completes its tasks, it generates a report that summarizes the number of extracted values, enriched fields, and objectives that it ran.

You can access the product experience agent in the following ways:

- Access the agent in CLAIRE Copilot, where it interprets your query and completes your request.
- Start a conversation in CLAIRE GPT, navigate to CLAIRE Copilot, and enrich records using the agent.

Preview Notice: Effective in the April 2026 release, the product experience agent is available in some PODS for preview. For more information about POD availability, see POD availability and Networking matrix.Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Product experience agent skills

The product experience agent uses AI-powered skills to automate how product records are enriched.

The product experience agent includes the following key skills to enrich product records with intelligent autonomy:

- Extracts information from a PDF and enriches a record that is open with the extracted information.
- Autonomously corrects validation errors if the fields that the agent tries to enrich fail validation.
- Enriches records by running the on-request objectives that you select.
- Classifies records.

Enriching records through data extraction

The product experience agent can extract data from PDFs to enrich product records, which reduces manual data entry and improves record accuracy.

When you ask CLAIRE Copilot to enrich a record with information from a PDF, CLAIRE Copilot uses the skills of the product experience agent. The agent first creates a draft of the record and then updates it with extracted values. If the fields that the agent tries to enrich fail validation, the agent attempts to correct the values three times. You need to publish the draft to add the enriched data to the record.

Note: When you use CLAIRE Copilot to enrich records with PDF data, ensure that you own the PDF or have permission to use its data. Informatica is not responsible for copyright or licensing issues that arise from PDFs that you use in MDM SaaS. Verify your rights before you upload documents.

The agent can enrich only one record at a time. Also, you can upload only one PDF in each prompt. However, you can upload multiple PDFs across multiple prompts in a conversation.

The product experience agent extracts data from PDF and builds a knowledge graph based on the business entity that the records belongs to. By default, the agent tries to enrich all empty fields in the record. If the agent can't find relevant information for an empty field, it doesn't update the field. The agent can also overwrite values in existing fields based on your instructions.

Note: The agent can't overwrite data in field group entries or enrich a related record.

The agent doesn't convert mismatched reference data, such as currency or units of measurement. For example, if the PDF contains weight in pounds (lbs) and the record uses kilograms (kg), the agent doesn't convert the weight from pounds to kilograms to enrich the corresponding field.

If PDF contains a decimal value for a numeric field, the agent rounds it to the nearest integer. For example, if the PDF contains the value 23.7, the agent rounds it to 24. Also, the agent currently supports PDF extraction in English only.

For more information about guidelines to use PDF, see "Guidelines for using the product experience agent" on page 280.

Sample conversation

Use CLAIRE Copilot to enrich an incomplete record with PDF data.

Let's look at a sample conversation that shows how to use CLAIRE Copilot to enrich a record with data from a PDF. Your organization has an incomplete record named Blower LXT in Product 360 SaaS. You want to enrich this record with data from a product brochure.

1. In Product 360 SaaS, open the Blower LXT record.

2. Start a conversation with CLAIRE Copilot to enrich the record, upload a PDF, and enter the following prompt:

   ```
   Enrich this record with PDF data.
   ```

   The product experience agent uses the product enrichment skill and displays a comprehensive plan to enrich the record.

   The following image shows the enrichment plan that the product experience agent displays after you submit the prompt with the uploaded PDF:

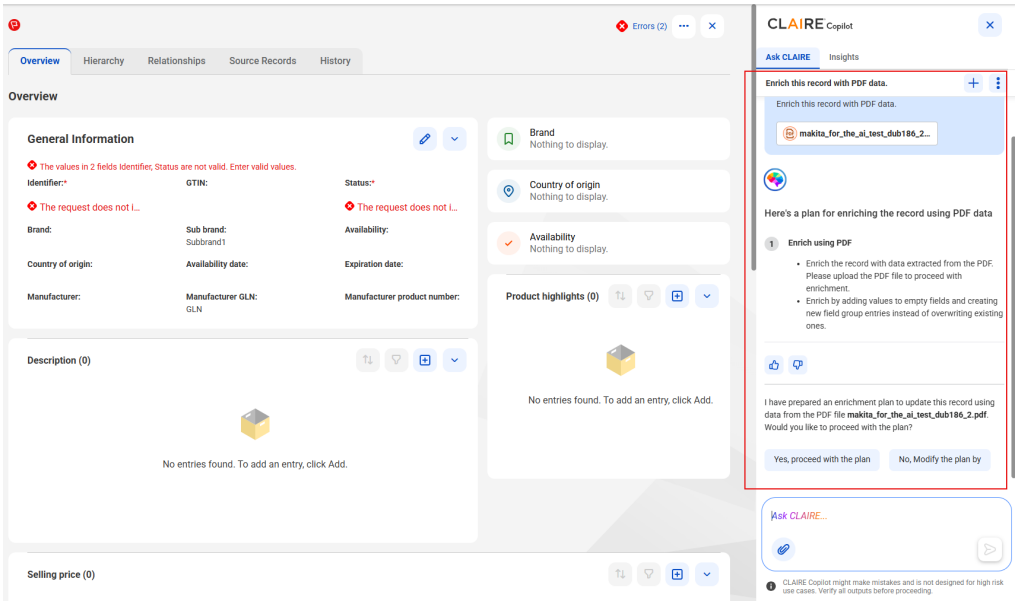

3. Click **Yes, proceed with the plan**, and submit the prompt.

   The agent extracts data from the uploaded PDF and enriches the record. After the agent completes enriching the record, the record appears in the draft state. CLAIRE Copilot also displays the Values Extracted from PDF and Data Completion Report cards.

   The following image shows the enriched record in the draft state with the Values Extracted from PDF and Data Completion Report cards in the CLAIRE Copilot panel:

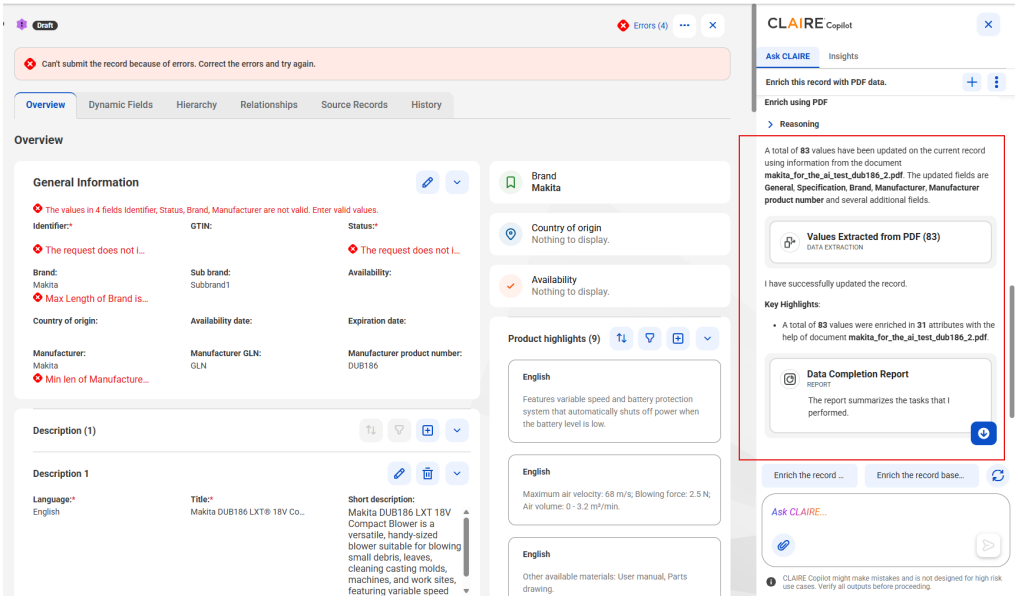

4. To view the extracted values and enriched fields, click the **Values Extracted from PDF** card.

   The **Values Extracted from PDF** workspace appears.

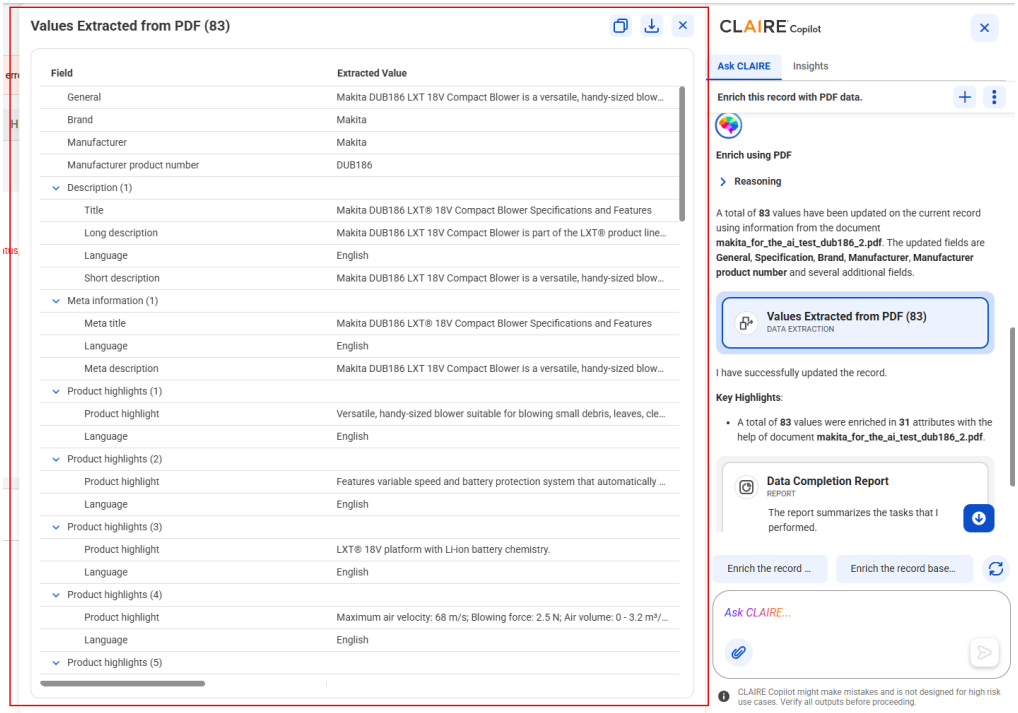

5. To view the summary of enrichment, click the **Data Completion Report** card.

   The **Data Completion Report** workspace appears.

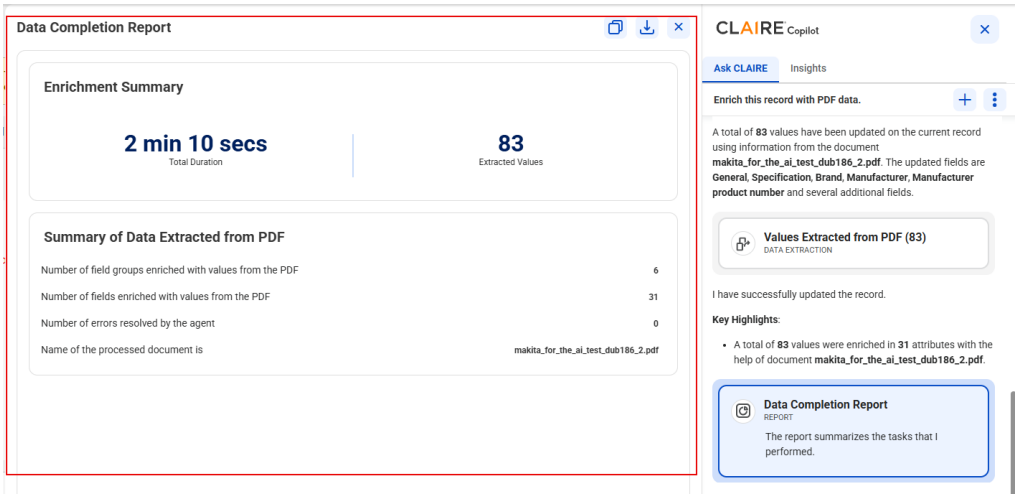

6. Submit the record.

Enriching a record using on-request objectives

The product experience agent can enrich records by running on-request objectives configured for fields.

When your prompt CLAIRE Copilot to enrich a record using objectives, the agent displays the on-request objectives configured for fields. You can ask the agent to run specific objectives or all of them.

The agent can't run the following types of objectives:

- Automatic objectives
- Objectives to display enrichment data as recommendations
- Objectives to perform validation and cleansing

Sample conversation

Let's look at a sample conversation to show how to enrich a record by using on-request objectives in CLAIRE Copilot.

Your organization has an incomplete record named Blower LXT in Product 360 SaaS. You want to enrich this record from external sources through configured objectives.

1. In Product 360 SaaS, open the Blower LXT record.
2. Start a conversation with CLAIRE Copilot to enrich the record using objectives, and enter the following prompt:

   Enrich this record using objectives.

   The product experience agent displays a comprehensive plan to enrich the record.

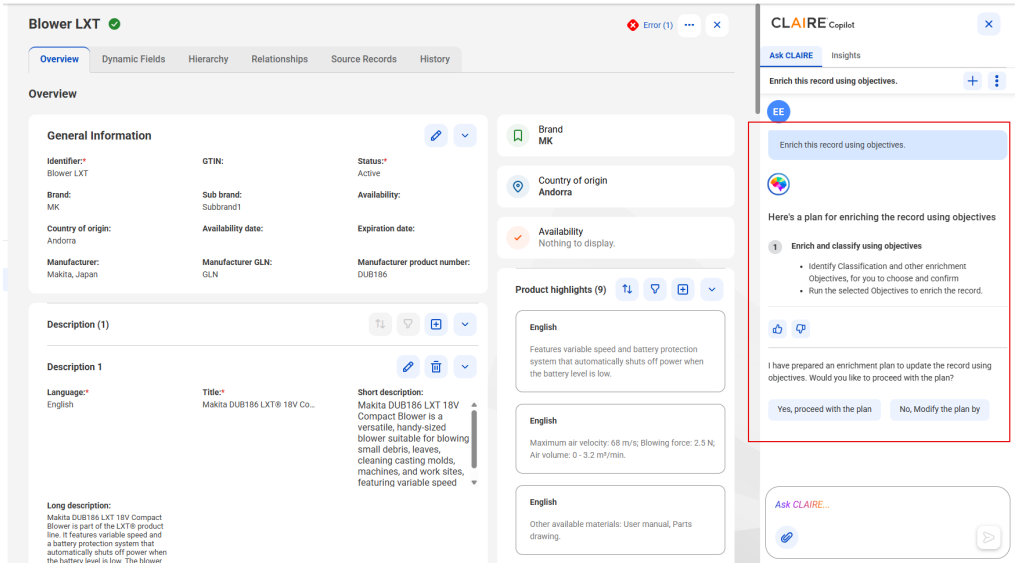

3. Click **Yes, proceed with the plan**, and submit the prompt.

The product experience agent identifies the on-request objectives and the Identified Objectives card appears.

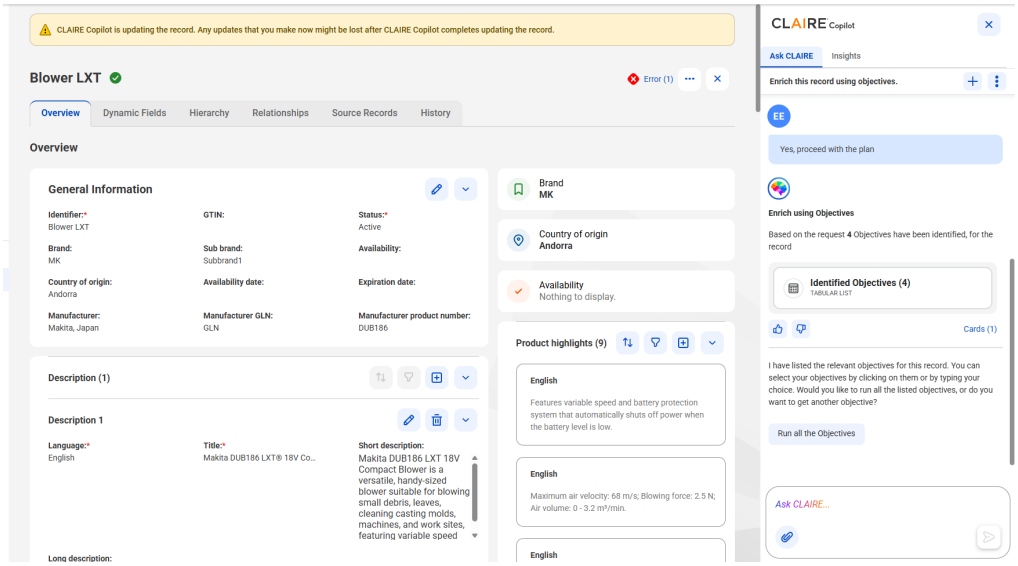

4. Click the **Identified Objectives** card, and select the objectives that you want to run, or ask the agent to run all the objectives.

   The objectives that you select appear in the prompt box.

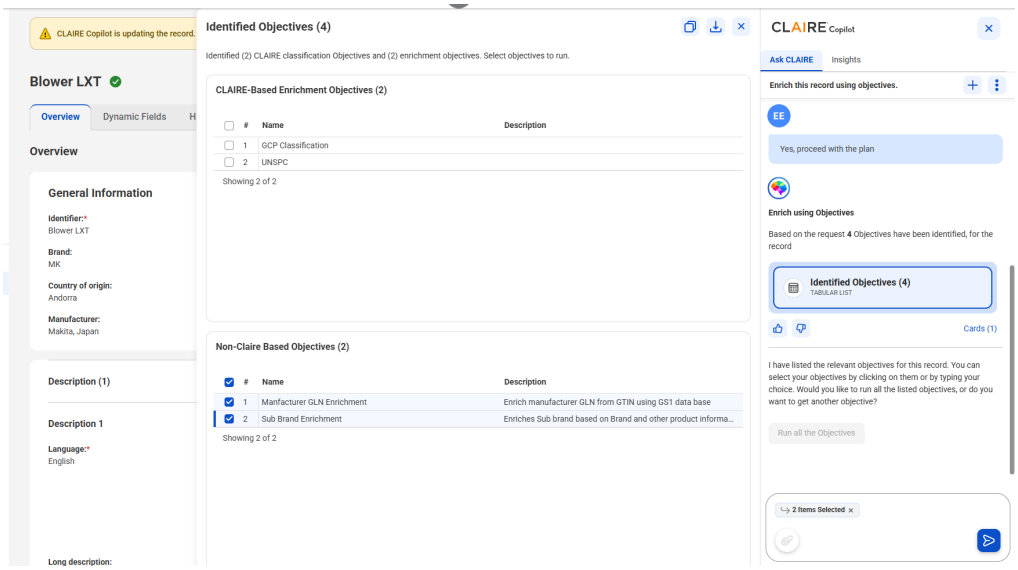

5. Submit the objectives that you selected.

CLAIRE Copilot displays the names of the objectives that it ran successfully.

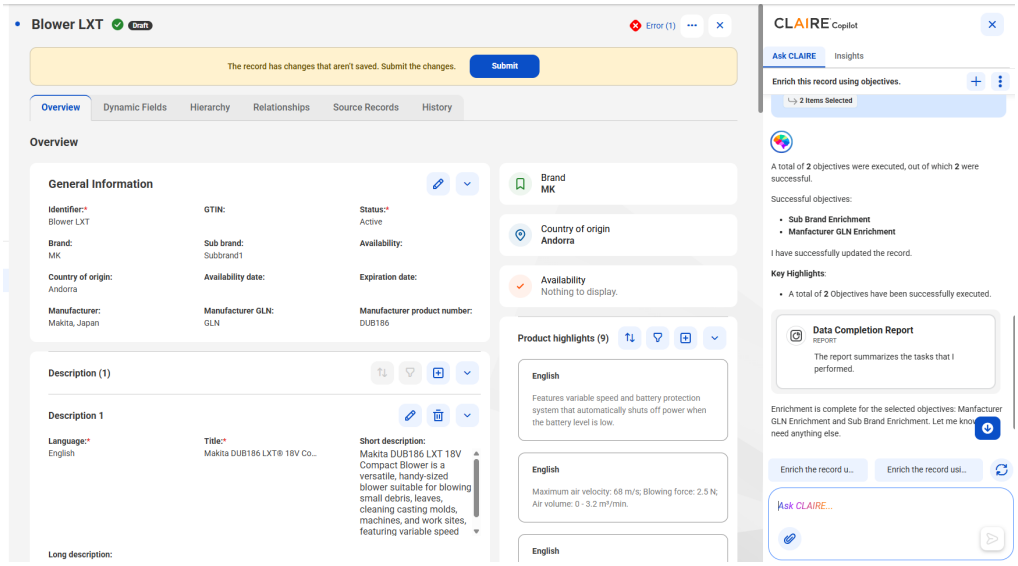

6. To view the details of the data completion report, click the **Data Completion Report** card.

   The Data Completion Report workspace appears.

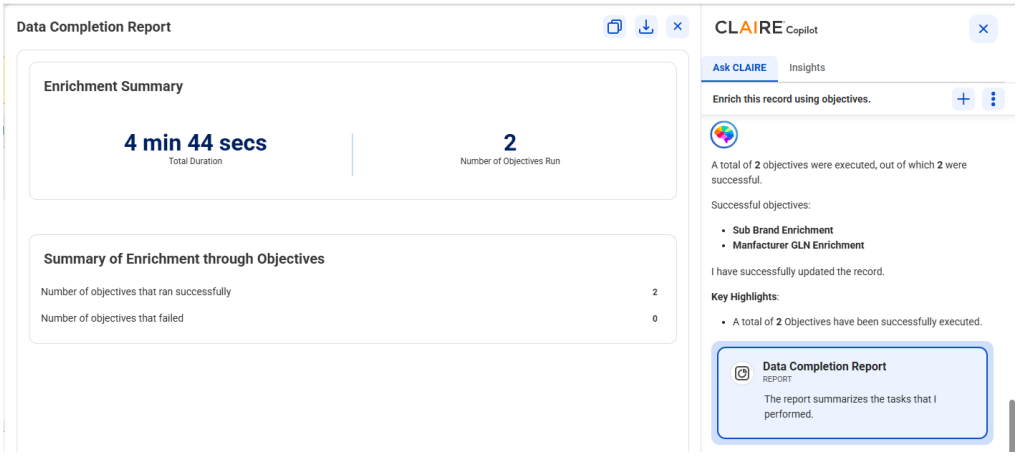

7. Submit the record.

Classifying records

The product experience agent classifies records by assigning them to relevant hierarchies based on configured objectives and confidence scores.

When you ask CLAIRE Copilot to classify a record, the agent identifies the objectives that are configured for classification. You can select specific objectives or ask the agent to run all the objectives.

The following image shows two classification objectives in the CLAIRE-Based Enrichment Objectives section of the Identified Objectives workspace:

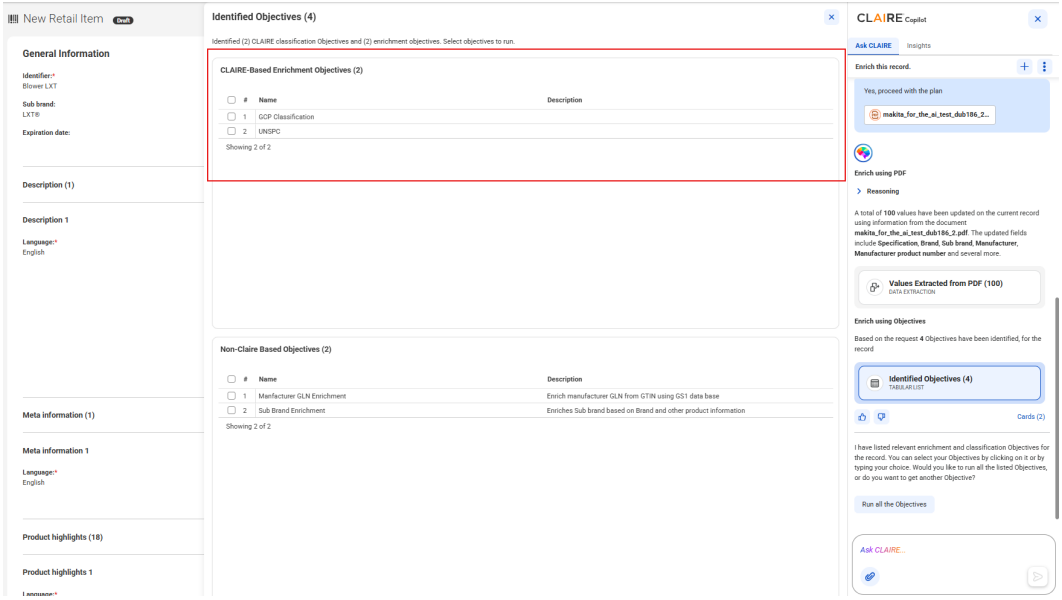

After you submit the selected objectives, the agent identifies relevant hierarchies and nodes based on the details available in those objectives, such as hierarchy and relationship types. It then recommends parent records and hierarchy nodes for classification, along with confidence scores.The record is assigned to a recommended hierarchy if the confidence score meets or exceeds the accept threshold specified in the configuration.

When you prompt the agent to enrich a record without asking it to classify it, it automatically runs classification objectives along with other tasks. You can also specifically ask the agent to classify records.

After the agent assigns a record to a hierarchy, the dynamic fields from the parent record become available in the classified record.

Note: The agent assigns records only to hierarchies that a process hierarchies job processed.

Note: Effective in the April 2026 release, the ability to classify records using the product experience agent is available for preview.

Sample conversation

Let's look at a sample conversation to show how to classify a record by using CLAIRE Copilot.

Your organization has a record named Blower LXT in Product 360 SaaS. You want to assign this record to relevant hierarchies through configured classification objectives.

1. In Product 360 SaaS, open the Blower LXT record.
2. Start a conversation with CLAIRE Copilot to classify the record, and enter the following prompt:

   `Classify this record.`

   The product experience agent uses the product classification skill and displays a comprehensive plan to classify the record.

The following image shows the classification plan that CLAIRE Copilot displays in response to the prompt:

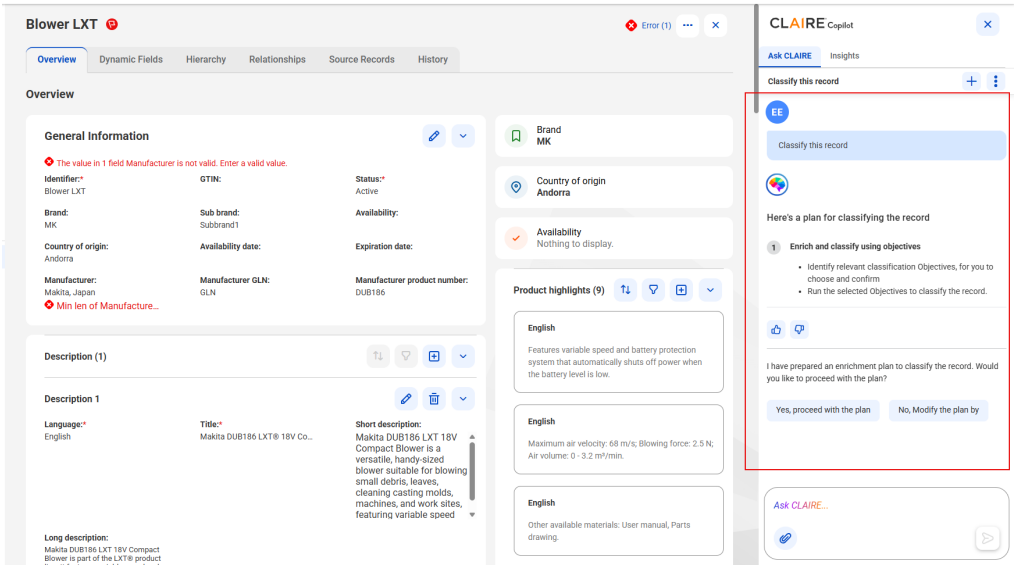

3. Click **Yes, proceed with the plan**, and submit the prompt.

   The product experience agent identifies the objectives that are configured for classification and displays the Identified Objectives card.

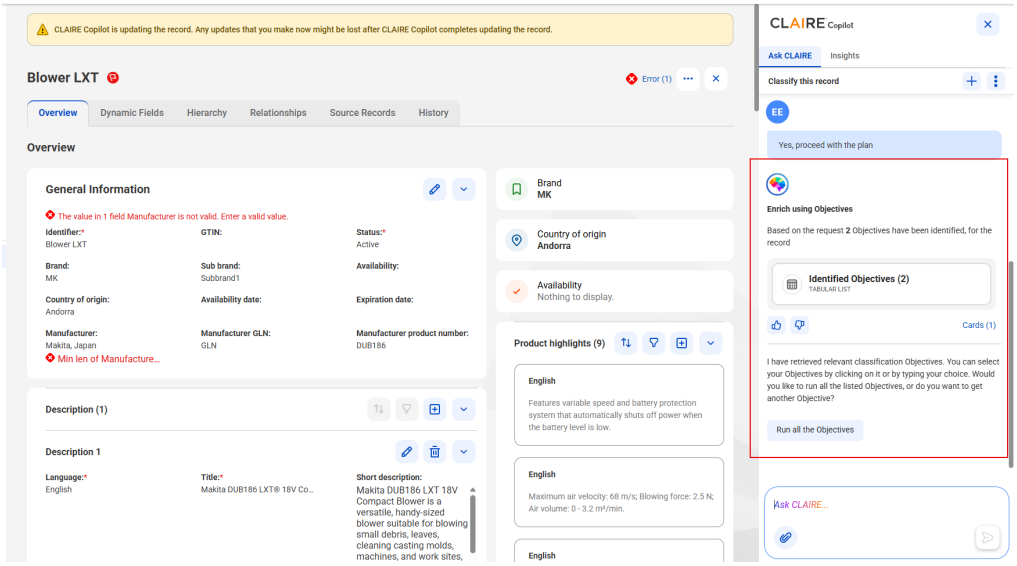

4. Click the **Identified Objectives** card, and select the objectives that you want to run or ask the agent to run all the objectives.

The objectives that you select appear in the prompt box.

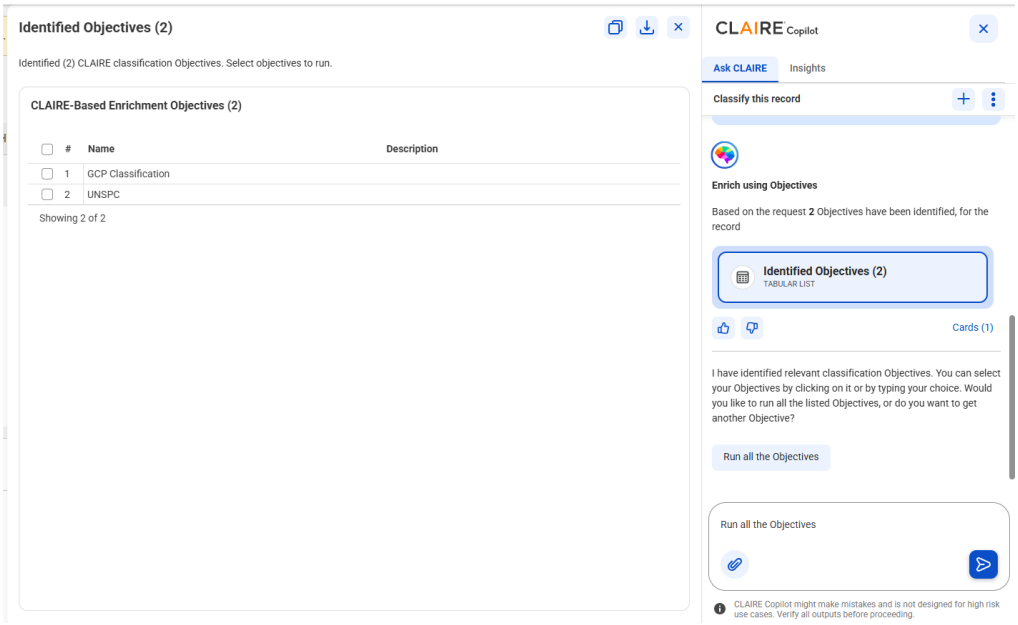

5. Submit the objectives that you selected.

   The agent identifies relevant hierarchies and nodes based on the details available in those objectives, such as hierarchy and relationship types. It then recommends parent records and hierarchy nodes for classification, along with confidence scores. The record is assigned to a recommended hierarchy if the confidence score meets or exceeds the accept threshold specified in the configuration. CLAIRE Copilot displays the Hierarchies the Record Was Assigned to card.

   The following image shows the results that CLAIRE Copilot displays after it runs the classification objectives:

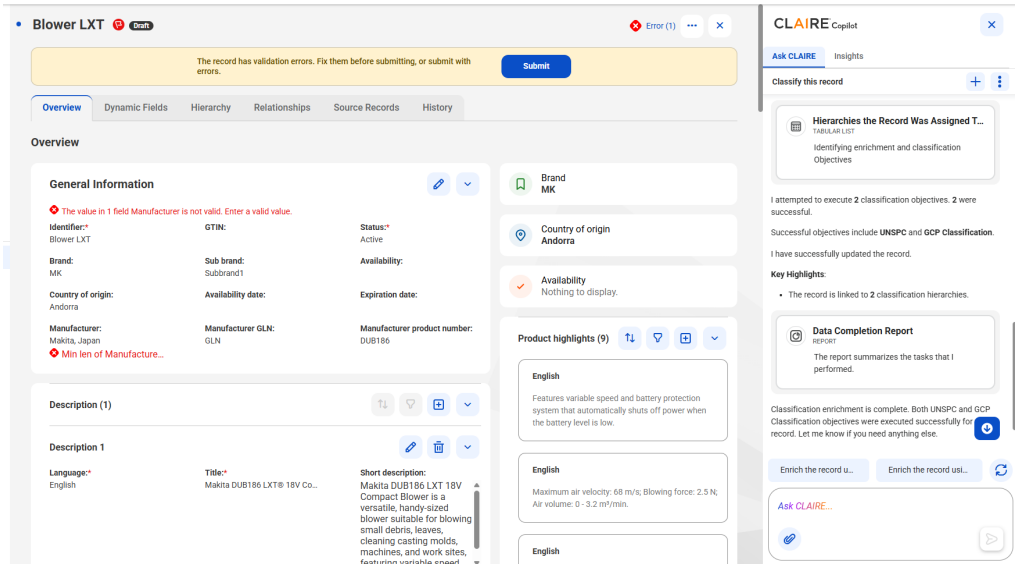

6. To view the hierarchies that the record is assigned to, click the **Hierarchies the Record Was Assigned to** card.

The Hierarchies the Record Was Assigned to workspace appears.

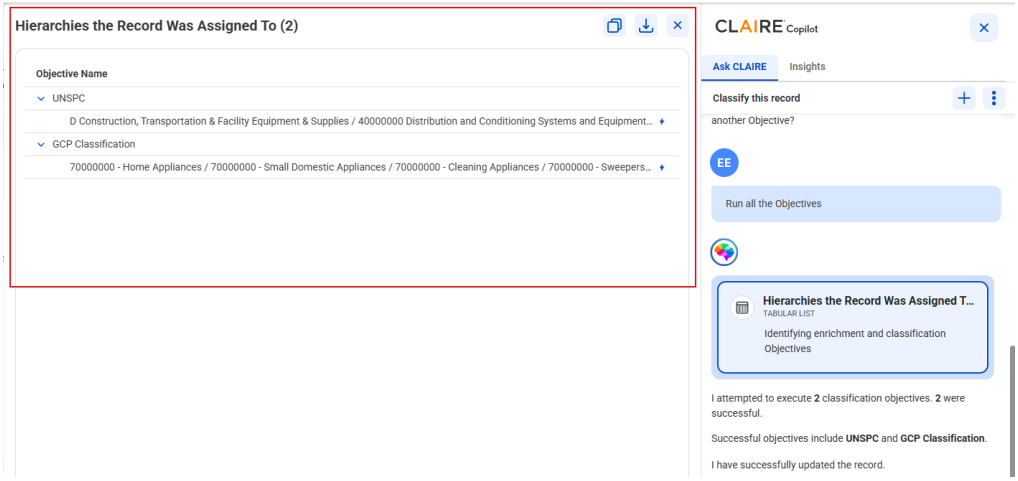

7. To view the summary of the classification task, click the **Data Completion Report** card.

   The Data Completion Report workspace appears.

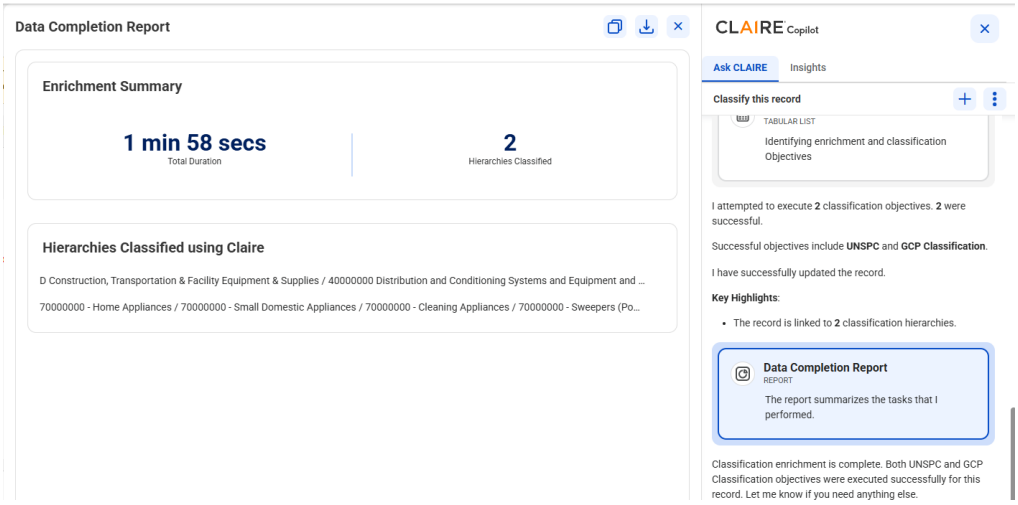

8. Submit the record.

Guidelines for using the product experience agent

Consider the following rules and guidelines when you use product experience agent in CLAIRE Copilot for MDM SaaS:

- Ensure that you have access to the fields that you want the agent to enrich.
- Before you start a conversation, open the record that you want the agent to enrich.
- Upload only one PDF in a prompt. You can upload multiple PDFs across different prompts in the same conversation.
- Ensure that each PDF file is 20 MB or smaller.
- Upload text-based PDFs. The agent can extract text only from PDFs that contain data in text format, not as scanned images.
- Don't upload PDFs that contain watermarks. The agent can't extract text from them.

- After the agent creates and enriches a draft of the record, ensure that you publish the draft manually because the agent can't publish it for you.
- Ensure that records aren't in the pending status. The product experience agent can't enrich or classify records that are in the pending status.

APPENDIX A

Keyboard shortcuts

You can use keyboard shortcuts to navigate and work with the Supplier 360 SaaS user interface.

Press the Tab key to navigate across the application and Shift+Tab keys to navigate backwards. A solid line appears around the selected element. The navigation order of objects is from top to bottom and left to right.

You can't use keyboard shortcuts when you use dynamic fields and the workflow inbox.

The following table lists the actions that you can perform with keyboard shortcuts:

Action	Shortcut key
Navigate across elements	Tab
Navigate backwards across elements	Shift+Tab
Perform the selected operation	Enter
Open the calendar	Alt+Down arrow
Select a value or clear the selection	Space
Select multiple nodes	Shift+Space
Expand a node	Shift+Right arrow
Collapse a node	Shift+Left arrow
Decrease the width of a table header	Alt+Left arrow
Increase the width of a table header	Alt+Right arrow
Scroll left	Ctrl+Left arrow
Scroll right	Ctrl+Right arrow
Navigate to the upper cell in a table	Up arrow
Navigate to the lower cell in a table	Down arrow
Navigate to the left cell in a table	Left arrow
Navigate to the right cell in a table	Right arrow
Delete a node	Delete or Shift+D

Action	Shortcut key
Add a new node	Shift+N
Cut one or more nodes	For Windows: Ctrl+X For Mac: Cmd+X
Paste the cut nodes	For Windows: Ctrl+V For Mac: Cmd+V
Close a dialog box	Escape
In the comparison view, navigate to the next row that underwent changes	N
In the comparison view, navigate to the previous row that underwent changes	P
Navigate to the first cell in a table	For Windows: Home For Mac: Fn+Left arrow
Navigate to the last cell in a table	For Windows: End For Mac: Fn+Right arrow

INDEX

A

add chart 155
adding records
  overview 43, 67

B

business entities 12
business entity records
  searching and editing example 71
business entity relationships
  example 54

C

CLAIRE Copilot
  getting started 256
contact
  business entity 12
custom chart 145
custom reports 150

D

dashboard 93, 139, 140
data entry forms
  Business Entities view, using 44, 47
data import 169

E

edit reports 159
email addresses
  for notification 14
entities
  business 12

F

finding records 56, 59

H

hierarchies
  about 13
  adding hierarchy records 205
  moving hierarchy records 207, 208
  removing hierarchy records 205

I

importing data
  operation 168, 182, 185
individual record widget 160
Informatica Global Customer Support
  contact information 10
Informatica Intelligent Data Management Cloud
  web site 9

M

maintenance outages 10
manage dashboard 142
manage widget 142
master record
  about 161
  best version of the truth 161
Match Analysis and Explainability dashboard 111
model *See business entity*
moving a hierarchy record
  record that has no child records 209
  scenarios 208
Moving a hierarchy record
  record with its child records 212
  record without its child records 215

P

passwords
  changing 14
predefined dashboards 93
profiles
  editing 14

Q

quick record 54

R

records
  adding 47
Records
  adding 44
related records
  adding 55
relationship
  creating 220–222
  filtering 221, 222
relationships
  about 219, 222

relationships *(continued)*
managing 219, 222
report 147
Reports based on master records 148

S

search
filtering 60
row-level security 60
sorting 60
search localized picklist values 70
search results page 60
searching and editing
example 71
security questions
editing 14
source record
unmerge 164
unmerging 161
status
IDMC 10
supplier
business entity 12
system status 10

T

tasks
about 13
time zones
changing user profile 14
trust site
description 10

U

unmerge records 164
upgrade notifications 10
user profiles
editing 14

W

web site 9
widgets 93, 139, 140
workflows
about 13